




# Engineering Data



# Engineering Data

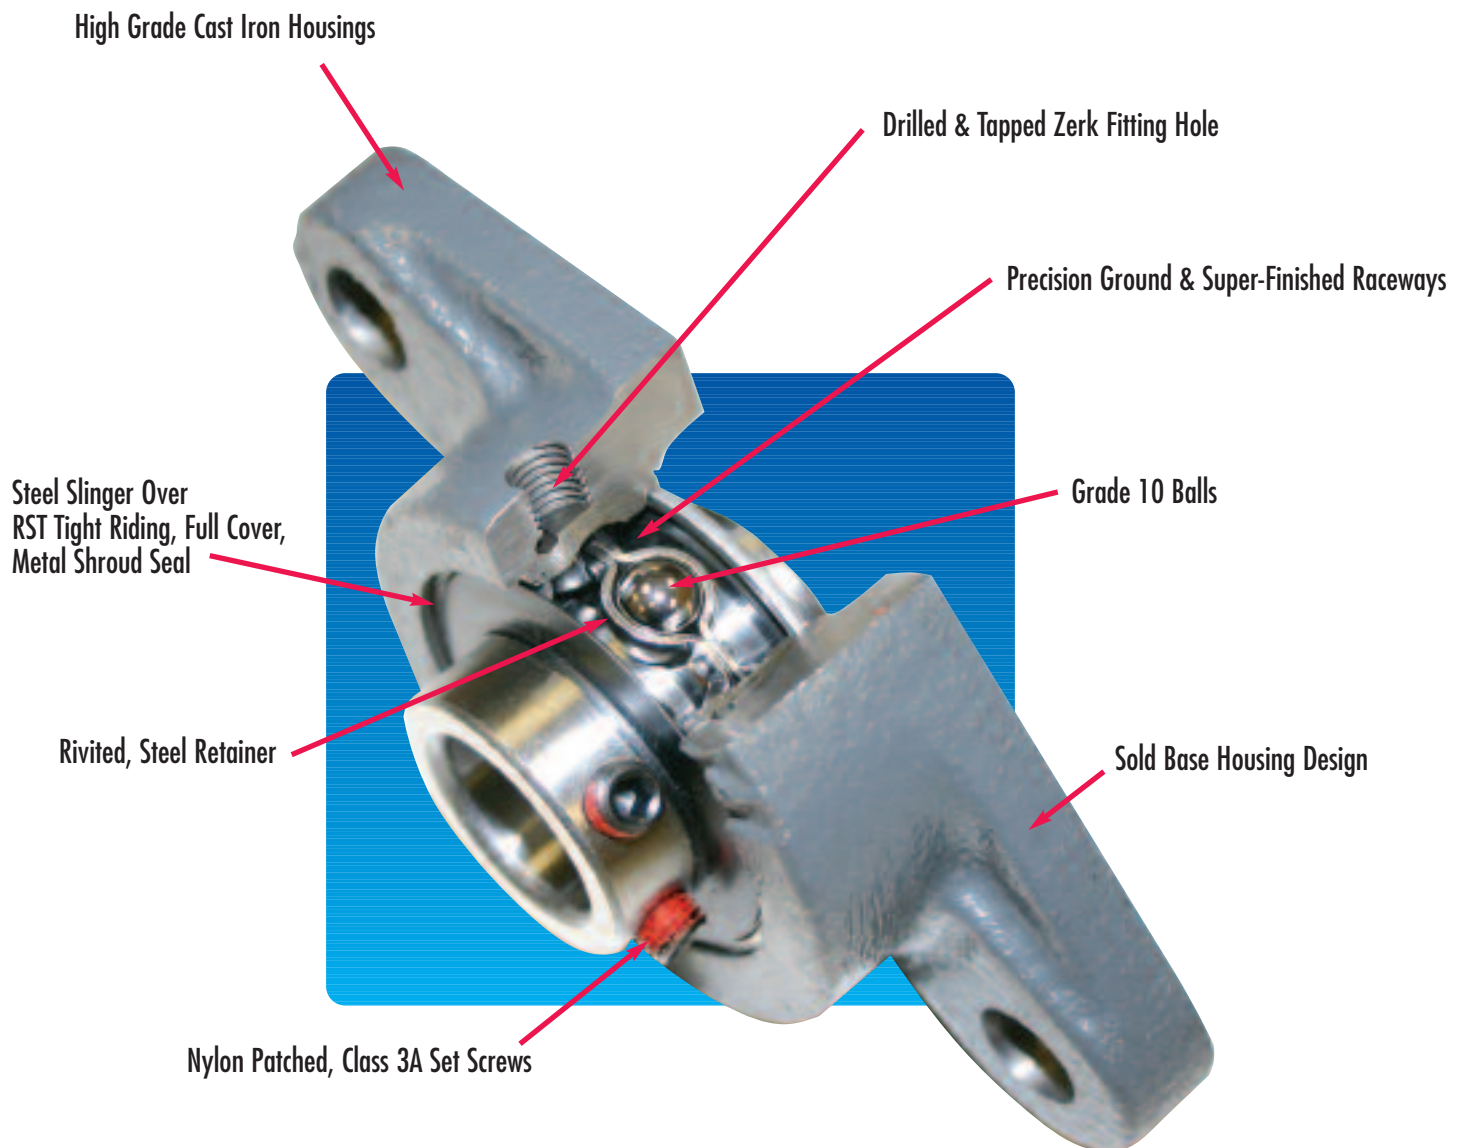

## A. Construction and features of ball bearing mounted units.

PEER mounted ball bearing units consist of a double sealed, single row, deep groove ball bearing and any one of many types of housings. The outer ring of the self-contained ball bearing is ground to a sphere along with the matching bore of the corresponding housing to provide self alignment capabilities. Cylindrical outer ring ball bearings are also available.

- A. Figure 1 shows a cut away view of a standard 2-Bolt flange with set screw locking (UC series shown).
- B. Figure 2 shows a cut away view of a standard pillow block housing with an eccentric locking collar bearing (HC Series shown).
- C. Figure 3 shows a cut away view of a standard pillow block housing with a Grip-It locking bearing (GR Series).



Figure 1

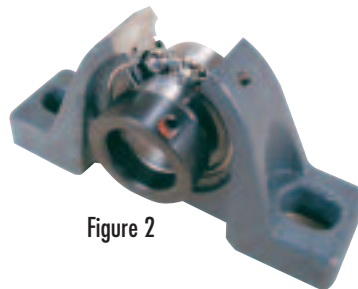


Figure 2

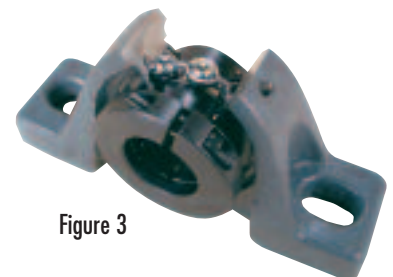


Figure 3

## B. Typical features of PEER ball bearing mounted units.

### (1) Internal construction of single row deep groove bearings in mounted units.

The ball bearings used in mounted units are quite similar to the 6200 and 6300 series of single row, deep groove, radial ball bearings. These bearings are designed to operate under radial and to a lesser degree thrust loads and combined loads. They have considerably greater load carrying capacity than double row, self aligning bearings used in some other types of mounted units.

### (2) Bearing materials.

#### 52100 Bearing Grade Steel.

PEER bearings inner ring, outer ring and balls are made of 52100 vacuum degassed steel. This high quality steel coupled with precision grinding and super finishing techniques increases bearing life and reduces bearing noise.

#### Stainless Steel

Peer Bearing Company's line of stainless steel bearings are designed to meet the demanding requirements of the FDA and USDA where wash-down and corrosion resistance are necessary. The full stainless steel bearings provide contamination and corrosion protection for long life.

| Component  | Material                  |
|------------|---------------------------|
| Rings      | Grade 440 Stainless Steel |
| Balls      | Grade 440 Stainless Steel |
| Retainer   | Grade 304 Stainless Steel |
| Slingers   | Grade 304 Stainless Steel |
| Set Screws | Grade 304 Stainless Steel |
| Seals      | Silicone (Si)             |
| Grease     | FDA Approved.             |

### (3) Seals used on standard 52100 bearings. (See representative drawings on page 83)

PEER offers a multitude of bearing seal designs allowing users to select the one that is best suitable for their particular application.

- a) The most common seal design is the PEER "R" seal. This incorporates a full shroud contact seal with rubber lip and slinger assuring positive dirt exclusion. The inboard contact seal is staked securely to the outer ring and the curved Buna-N rubber lip seals along the outside of the inner ring. The metal slinger is attached to the outside of the inner ring creating a complex path for contaminants to enter the bearing.
- b) The PEER "RST" seal is similar to the contact seal used in the "R" seal design but without the slinger. It has a full cover shroud and positive rubber lip contact to the inner ring.
- c) The PEER "TRL" triple lip seals are full cover shroud style with three individual wiping lips for the most complete protection against contaminants.

- d) The PEER "DBL" double lip seals are full cover shroud style with two distinct rubber wiping lips. These are useful where additional protection is needed but high RPM's will not allow for the extra torque they require.
- e) The PEER "Z" seal is a full cover shroud non-contact shield used where high RPM's and the need for a free spinning bearing are present. Available with slinger on wide inner ring bearings.

### (3a) Seals used on Stainless Steel bearings.

PEER Stainless steel bearings incorporate silicone rubber seals in compliance with FDA guidelines. Stainless steel slingers are also available on wide inner ring stainless steel bearings.

#### Seal Materials Comparison:

| BASE POLYMER      | NITRILE                          | SILICONE                         | FLUOROELASTOMER                  |
|-------------------|----------------------------------|----------------------------------|----------------------------------|
| Material Code     | NBR                              | Si                               | Viton                            |
| Temperature Range | -40 F ~ 250 F<br>(-35 C ~ 120 C) | -80 F ~ 400 F<br>(-60 C ~ 200 C) | -30 F ~ 400 F<br>(-35 C ~ 200 C) |
| Oil Resistance    | E                                | G                                | E                                |
| Acid Resistance   | G                                | F                                | E                                |
| Alkali Resistance | G                                | X                                | F                                |
| Water Resistance  | G                                | G                                | G                                |
| Heat Resistance   | G                                | E                                | E                                |
| Cold Resistance   | G                                | E                                | F                                |
| Wear Resistance   | E                                | G                                | E                                |
| Ozone Resistance  | G                                | E                                | E                                |

E=Excellent G=Good F=Fair X=Not Recommended

### (4) Locking Mechanisms.

PEER offers 3 distinct methods of locking the bearing to the shaft.

#### a) Set Screw Locking

This incorporates two class 3 set screws with nylon patch spaced 62 degrees apart in the inner ring extension. The areas around the set screws are high frequency annealed to allow the use of larger diameter set screws further increasing their effectiveness. The addition of a nylon patch to the set screws prevents their backing out under high vibration situations. See Photo A




Photo A

#### b) Eccentric Locking Collar

The PEER eccentric locking collars are designed for use in applications where the shafts rotate in a single direction. They incorporate a matching eccentricity between the inner ring and locking collar. A radiused area in both the collar and inner ring where the eccentricity begins is instrumental in preventing cracks in this high stress area. Matching angles between the inner ring and locking collar provide optimal contact and security. PEER locking collars come standard with class 3 nylon patched set screws. See photo B




Photo B

#### c) "GR" Series locking

The PEER "GR" series or 'Grip It' locking design uses a concentric split collar which assembles over six split wedges of the inner ring. When the collar is tightened it forces the inner ring to grip the shaft creating a concentric bearing to shaft lock. In addition, there is no damage to the shaft from set screws which eliminates shaft refinishing after disassembly or replacement. High strength Torx drive cap screws provide maximum clamping force. See photo C



Photo C

# Engineering Data



## (5) Housings.

- (a) **Cast Iron.** One piece cast iron housings provide solid construction and maximum wear resistance. Machined mounting surfaces and bearing seat insure proper mounting heights and bearing to housing alignment values. Cast or machined bolt holes make PEER interchangeable with most competitors.
- (b) **Ductile Iron.** One piece ductile or malleable iron housings are made to the same exacting standards as the PEER cast iron housings with the addition of higher tensile strength values.
- (c) **Nickel Plating.** For applications in the food, chemical and where added corrosion protection is needed, Cast iron and ductile housings are available with high phosphorous electroless nickel plating.
- (d) **Stamped Steel.** PEER offers a wide variety of stamped steel housings of various thicknesses for light load applications. These stampings are available in a wide variety of finishes such as zinc plated, yellow dichromate, black electroless or raw.
- (e) **Thermoplastic Housings.** PEER polymer housings are made of FDA recognized material and incorporate solid bases and stainless steel bolt inserts and grease fittings. When combined with PEER stainless steel or black oxide insert bearings, they are extremely resistant to corrosion and suited for use in washdown applications.
- (f) **Rubber Insulators.** PEER Nitrile rubber insulators provide insulation and noise reduction properties. The conductive rubber interliners are available for use with most styles of stamped steel housings.
- (g) **Stainless Steel.** PEER stainless steel housings are made of series 304 stainless steel and incorporate series 300 stainless steel grease fittings. Solid mounting surfaces make them ideally suited for food and chemical applications. These housings incorporate all the same machined features as our cast and ductile housings such as bearing seat, bolt holes and consistent mounting heights.

## (6) Self Alignment.

The outer rings of Peer insert bearings are spherically ground to correspond with a matching spherical bearing seat on Peer housings. This spherical combination provides self-alignment features, which compensate for alignment errors, uneven mounting surfaces and shaft flexing. Misalignment of up to 5 degrees for non-relube units and 1.5 degrees for relube units is possible.

## (7) Anti-rotation device.

The use of an anti-rotation pin in the outer ring prevents the bearing outer ring from turning in the housing. Located in the housing loading slot, this feature does not interfere with the self-aligning capability of the assembly. The anti-rotation pin is standard on wide inner ring bearings and an available option on flush back inner ring bearings.

## (8) Interchangeability of bearings in housings.

Peer mounted units offer complete interchangeability of self-contained insert bearings in housings. This allows easy replacement of bearings in the field.

## (9) Serviceability of assemblies.

Peer bearings are pre-lubricated with specially selected greases at the factory. Bearings and housings are available in a relubricable and non-relubricable version. Specialty greases and fill amounts are readily available. Relube fittings on Peer housings are available in a wide variety of styles and sizes.

## (10) Handling of bearings.

Sealed bearings used in mounted units are packaged to prevent contamination of grease and damage during shipping and handling. To protect bearings and assemblies during storage, it is recommended all components remain intact. Locking collars, grease fittings and dust caps are matched to provide the optimum performance.

### C. Tolerances

- 1. Tolerances for bearings.
- 1.1 Tolerances for inner ring.

**Table 1: Tolerances on inner rings of insert bearings with cylindrical bore.**

Unit: 0.001mm  
(0.0001 in)

| Nominal bore diameter<br>d |        |           |        | Cylindrical bore           |     |                 |               |               | Radial<br>run-out<br>(max.) |
|----------------------------|--------|-----------|--------|----------------------------|-----|-----------------|---------------|---------------|-----------------------------|
| Over                       |        | Including |        | Bore Diameter              |     |                 | Width         |               |                             |
|                            |        |           |        | d <sub>mp</sub> Deviations |     | V <sub>dp</sub> | Bi Deviations |               |                             |
| mm                         | in.    | mm        | in.    | High                       | Low | Max             | High          | low           |                             |
| 10                         | .03937 | 18        | 0.7087 | +15<br>(+6)                | 0   | 10<br>(4)       | 0             | -120<br>(-47) | 10<br>(4)                   |
| 18                         | 0.7087 | 31.750    | 1.2500 | +18<br>(+7)                | 0   | 12<br>(5)       | 0             | -120<br>(-47) | 13<br>(5)                   |
| 31.750                     | 1.2500 | 50.800    | 2.0000 | +21<br>(+8)                | 0   | 14<br>(5.5)     | 0             | -120<br>(-47) | 15<br>(6)                   |
| 50.800                     | 2.0000 | 80        | 3.1496 | +24<br>(+9)                | 0   | 16<br>(6)       | 0             | -150<br>(-59) | 20<br>(8)                   |
| 80                         | 3.1496 | 120       | 4.7244 | +28<br>(+11)               | 0   | 19<br>(7.5)     | 0             | -200<br>(-79) | 25<br>(10)                  |

d<sub>mp</sub> = Single plane mean bore diameter deviation

V<sub>dp</sub> = Bore diameter variation in a single radial plane

**Table 1a: Bearing IR Tolerances Stainless steel bearings**

Unit: 0.001mm

| Bore Size |       | Bore Diameter  |     |      |     | Width |      |
|-----------|-------|----------------|-----|------|-----|-------|------|
| Over      | Incl. | d <sub>m</sub> |     | d    |     | Bi    |      |
|           |       | High           | Low | High | Low | High  | Low  |
| 10        | 18    | +18            | 0   | +22  | -4  | 0     | -120 |
| 18        | 30    | +21            | 0   | +25  | -4  | 0     | -120 |
| 30        | 50    | +25            | 0   | +30  | -5  | 0     | -120 |
| 50        | 80    | +30            | 0   | +36  | -6  | 0     | -150 |

Note: d<sub>m</sub> is defined as the arithmetical mean of the largest and the smallest diameter obtained by two point measurements.

# Engineering Data



1.2 Tolerances for outer rings.

**Table 2: tolerances on outer rings**

Unit: 0.001mm  
(0.0001 in)

| Nominal outside diameter |        |       |        | Dm deviations |              | Radial Run-out (Max.) |
|--------------------------|--------|-------|--------|---------------|--------------|-----------------------|
| Over                     |        | Incl. |        | High          | Low          |                       |
| mm                       | in.    | mm    | in.    |               |              |                       |
| 30                       | 1.1811 | 50    | 1.9685 | 0             | -11<br>(-4)  | 20<br>(8)             |
| 50                       | 1.9685 | 80    | 3.1496 | 0             | -13<br>(-5)  | 25<br>(10)            |
| 80                       | 3.1496 | 120   | 4.7244 | 0             | -15<br>(-6)  | 35<br>(14)            |
| 120                      | 4.7244 | 150   | 5.9055 | 0             | -18<br>(-7)  | 40<br>(16)            |
| 150                      | 5.9055 | 180   | 7.0866 | 0             | -25<br>(-10) | 45<br>(18)            |
| 180                      | 7.0866 | 250   | 9.8425 | 0             | -30<br>(-12) | 50<br>(20)            |
| 250                      | 9.8425 | 315   | 12.402 | 0             | -35<br>(-14) | 60<br>(24)            |

**Note:**

1. *dm* is defined as arithmetical mean of the largest and smallest diameter obtained by two point measurements.
2. The low deviation of outside diameter *dm* does not apply within the distance of 1/4 the width of outer ring from the side.

**Table 2a: Bearing OR Tolerances Stainless Steel bearings**

Unit: 0.001mm

| Nominal OD "D" |       | Dm Deviations |     | Radial Run-out |
|----------------|-------|---------------|-----|----------------|
| Over           | Incl. | High          | Low | Max.           |
| 30             | 50    | 0             | -11 | 20             |
| 50             | 80    | 0             | -13 | 25             |
| 80             | 120   | 0             | -15 | 35             |
| 120            | 150   | 0             | -18 | 40             |

*Note: dm* is defined as the arithmetical mean of the largest and the smallest diameter obtained by two point measurements.

**2. Tolerances for cast iron housings.**  
 2.1 Tolerances for spherical inner diameter of housings


**Table 3. Tolerances for spherical inner diameter of housings And resultant fits.**

Unit: 0.001mm  
 (0.0001 in)

| Nominal Spherical inside diameter (D1) |        |       |        | J7             |             |               |             | K7             |              |               |              | N6             |              |               |              |
|--|--------|-------|--------|----------------|-------------|---------------|-------------|----------------|--------------|---------------|--------------|----------------|--------------|---------------|--------------|
| Over                                   |        | Incl. |        | D1m Deviations |             |               |             | D1m Deviations |              |               |              | D1m Deviations |              |               |              |
| mm                                     | in     | mm    | in     | High           | Low         | Resultant fit |             | High           | Low          | Resultant fit |              | High           | low          | Resultant fit |              |
| 30                                     | 1.1811 | 50    | 1.9685 | +14<br>(+6)    | -11<br>(-4) | 25L<br>(11L)  | 11T<br>(4T) | +7<br>(+3)     | -18<br>(-7)  | 18L<br>(7.5L) | 18T<br>(7T)  | -12<br>(-5)    | -28<br>(-11) | 1T<br>(0.5T)  | 28T<br>(11T) |
| 50                                     | 1.9685 | 80    | 3.1496 | +18<br>(+7)    | -12<br>(-5) | 31L<br>(12L)  | 12T<br>(5T) | +9<br>(+4)     | -21<br>(-8)  | 22L<br>(9L)   | 21T<br>(8T)  | -14<br>(-6)    | -33<br>(-13) | 1T<br>(1T)    | 33T<br>(13T) |
| 80                                     | 3.1496 | 120   | 4.7244 | +22<br>(+9)    | -13<br>(-5) | 37L<br>(15L)  | 13T<br>(5T) | +10<br>(+4)    | -25<br>(-10) | 25L<br>(10L)  | 25T<br>(10T) | -16<br>(-6)    | -38<br>(-15) | 1T<br>(0)     | 38T<br>(15T) |
| 120                                    | 4.7244 | 150   | 5.9055 | +26<br>(+10)   | -14<br>(-6) | 44L<br>(17L)  | 14T<br>(6T) | +12<br>(+5)    | -28<br>(-11) | 30L<br>(12L)  | 28T<br>(11T) | -20<br>(-8)    | -45<br>(-18) | 2T<br>(1T)    | 45T<br>(18T) |
| 150                                    | 5.9055 | 180   | 7.0866 | +26<br>(+10)   | -14<br>(-6) | 51L<br>(20L)  | 14T<br>(6T) | +12<br>(+5)    | -28<br>(-11) | 37L<br>(15L)  | 28T<br>(11T) | -20<br>(-8)    | -45<br>(-18) | 5L<br>(2L)    | 45T<br>(18T) |
| 180                                    | 7.0866 | 250   | 9.8425 | +30<br>(+12)   | -16<br>(-6) | 60L<br>(24L)  | 16T<br>(6T) | +13<br>(+5)    | -33<br>(-13) | 43L<br>(17L)  | 33T<br>(13T) | -22<br>(-9)    | -51<br>(-20) | 8L<br>(3L)    | 51T<br>(20T) |
| 250                                    | 9.8425 | 315   | 12.402 | +36<br>(+14)   | -16<br>(-6) | 71L<br>(28L)  | 16T<br>(6T) | +16<br>(+6)    | -36<br>(-14) | 51L<br>(20L)  | 36T<br>(14T) | -25<br>(-10)   | -57<br>(-22) | 10L<br>(4L)   | 57T<br>(22T) |

D1m is defined as the arithmetical mean of the largest and the smallest diameter obtained by two point measurements.

**Table 3a: Housing Tolerances (Thermoplastic PBT)**

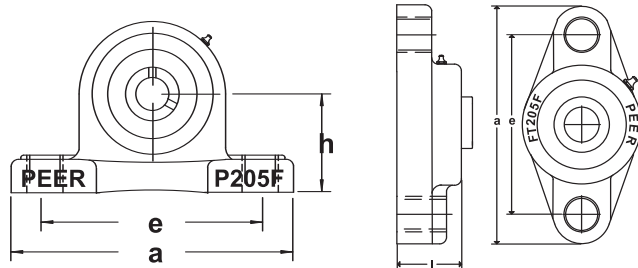

Unit: 0.01mm

| Size | Pillow Blocks (P200-PBT, PAS200-PBT Series) |     |      | Flanges (FT200-PBT, F200-PBT, FB200-PBT Series) |      |     |     |
|------|---|-----|------|---|------|-----|-----|
|      | Dimension                                   | h   | a    | e   | a    | e   | l   |
| 204  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 205  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 206  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 207  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 208  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 209  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 210  |   | ±15 | ±150 | ±50   | ±150 | ±60 | ±50 |
| 211  |   | ±20 | ±200 | ±70   | ±200 | ±80 | ±70 |
| 212  |   | ±20 | ±200 | ±70   | ±200 | ±80 | ±70 |

Pillow Block (P200-PBT) and 2-Bolt flange (FT200-PBT) shown

**Table 3b: Thermoplastic Housing Properties:**

|                                     |                                |                                 |                                    |                          |
|-------------------------------------|--------------------------------|---------------------------------|------------------------------------|--------------------------|
| Max. Operating Temperature<br>280°F | Tensile Strength<br>17,300 PSI | Flexural strength<br>27,500 PSI | Compression Strength<br>18,000 PSI | Impact<br>15 ft-lbs/inch |
|-------------------------------------|--------------------------------|---------------------------------|------------------------------------|--------------------------|

# Engineering Data




## 2.2 Tolerances for pillow block housings.

Table 4. Tolerances for "h" dimension for ductile and cast iron pillow block housings.

Unit: 0.0001 in. (mm)

| Housing No.<br>P, PSB, LP, PWC, PW,<br>PA, PAS | PX00 | Tolerance of h |
|--|------|----------------|
| 203  | --   | ±59<br>(±.15)  |
| 204  | --   |                |
| 205  | X05  |                |
| 206  | X06  |                |
| 207  | X07  |                |
| 208  | X08  |                |
| 209  | X09  |                |
| 210  | X10  |                |
| 211  | X11  |                |
| 212  | X12  |                |
| 213  | X13  |                |
| 214  | X14  |                |
| 215  | X15  |                |
| 216  | X16  |                |
| 217  | X17  |                |
| 218  | X18  | ±118<br>(±.30) |
| --   | --   |                |
| --   | X20  |                |

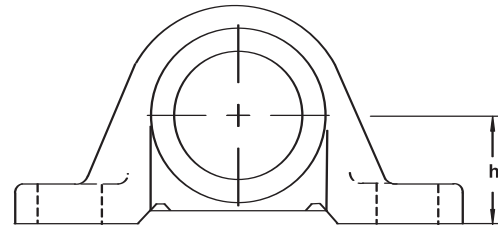


Note: h = height of mounting surface to shaft centerline

## 2.3 Tolerances for flange unit housings.

Table 5: tolerances for "e" dimension of ductile and cast iron flange unit housings.

Unit: 0.0001 in. (mm)


| Housing No.<br>F, FS, FT, FTS, LF, FD,<br>FLCT, FJ, FX, F4X, F3X,<br>F3C, FTJ | Casted tolerance of<br>e | Machined<br>tolerance of<br>e |
|---|--------------------------|-------------------------------|
| 203   | ±236<br>(±.6)            | ±197<br>(±.5)                 |
| 204   |                          |                               |
| 205   |                          |                               |
| 206   |                          |                               |
| 207   |                          |                               |
| 208   |                          |                               |
| 209   |                          |                               |
| 210   |                          |                               |
| 211   |                          |                               |
| 212   |                          |                               |
| 213   | ±315<br>(±.8)            |                               |
| 214   |                          |                               |
| 215   |                          |                               |
| 216   |                          |                               |
| 217   |                          |                               |
| 218   |                          |                               |

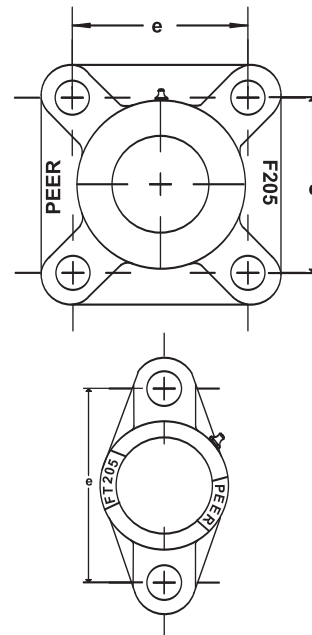

Note: 1) e = bolt holes centerline dimension.



**2.4 Tolerances for machined back (Piloted) flange unit housings. (FC)**  
 Table 6: Machined back flange unit housings (FC)

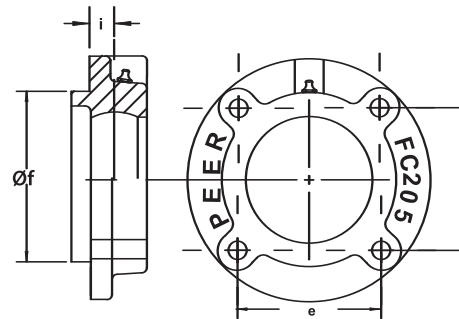

Unit: 0.0001 in. (mm)

| Housing No. | Machined tolerance of e | Machined tolerance of i | Radial runout of spigot joint (Max) | Tolerance of f |              |       |              |
|-------------|-------------------------|-------------------------|-------------------------------------|----------------|--------------|-------|--------------|
|             |                         |                         |                                     | FC200          |              | FCX00 |              |
|             |                         |                         |                                     | High           | Low          | High  | Low          |
| FC204       | ±157<br>(±.4)           | ±157<br>(±.4)           | 79                                  | 0              | -39<br>(-.1) | 0     | -39<br>(-.1) |
| FC205       |                         |                         |                                     |                |              |       |              |
| FC206       |                         |                         |                                     |                |              |       |              |
| FC207       |                         |                         |                                     |                |              |       |              |
| FC208       |                         |                         |                                     |                |              |       |              |
| FC209       |                         |                         |                                     |                |              |       |              |
| FC210       |                         |                         |                                     |                |              |       |              |
| FC211       |                         |                         |                                     |                |              |       |              |
| FC212       | ±197<br>(±.5)           | ±197<br>(±.5)           | 118                                 | 0              | -39<br>(-.1) | 0     | -39<br>(-.1) |
| FC213       |                         |                         |                                     |                |              |       |              |
| FC214       |                         |                         |                                     |                |              |       |              |
| FC215       |                         |                         |                                     |                |              |       |              |
| FC216       |                         |                         |                                     |                |              |       |              |
| FC217       |                         |                         |                                     |                |              |       |              |
| FC218       |                         |                         |                                     |                |              |       |              |
| --          | --                      |                         |                                     |                |              |       |              |
| --          | FCX20                   |                         | 157                                 |                |              |       |              |


Note: 1) e = bolt holes centerline dimensions.  
 2) i = bearing centerline distance from mounting surface.  
 3) f = outside diameter of spigot joint.

# Engineering Data



Table 7: Take up slot widths - "K" dimensions

| Housing No. | PEER Standard | Option | Option | Option |
|-------------|---------------|--------|--------|--------|
| T-204       | 17/32         | 15/32  | —      | 5/16   |
| T-205       | 17/32         | 15/32  | —      | 5/16   |
| T-206       | 17/32         | 15/32  | —      | 5/16   |
| T-207       | 17/32         | 15/32  | —      | 5/16   |
| T-208       | 11/16         | 5/8    |        |        |
| T-209       | 11/16         | 5/8    |        |        |
| T-210       | 11/16         | 5/8    |        |        |
| T-211       | .866          | 17/16  | 11/16  |        |
| T-212       | .866          | 17/16  | 11/16  |        |
| T-213       | 17/16         |        |        |        |
| T-214       | 17/16         |        |        |        |
| T-215       | 17/16         |        |        |        |
| T-216       | 17/16         |        |        |        |
| T-217       | 17/16         |        |        |        |

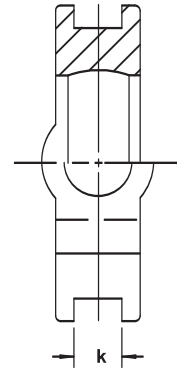


## 2.5 Tolerances for take up housings. (T)

Table 8: Tolerances for "K" and "e" dimensions  
For take up housings (T)

Unit: 0.0001 in.

| Housing No. |       | Tolerance Of K | Tolerance of e | Tolerance of parallelism between both grooves (Max.) |
|-------------|-------|----------------|----------------|--|
| T-204       | --    | +79<br>0       | 0<br>-197      | 157  |
| T-205       | T-X05 |                |                |  |
| T-206       | T-X06 |                |                |  |
| T-207       | T-X07 |                |                |  |
| T-208       | T-X08 |                |                |  |
| T-209       | T-X09 | +118<br>0      | 0<br>-315      | 236  |
| T-210       | T-X10 |                |                |  |
| T-211       | T-X11 |                |                |  |
| T-212       | T-X12 |                |                |  |
| T-213       | T-X13 |                |                |  |
| T-214       | T-X14 |                |                |  |
| T-215       | T-X15 |                |                |  |
| T-216       | T-X16 |                |                |  |
| T-217       | T-X17 |                |                |  |

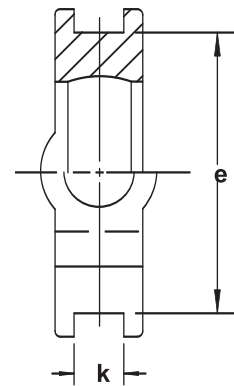


Note: 1) K = width of guide rail grooves  
2) e = the span of guide rail grooves

**2.6 Tolerances for cartridge unit housings[LL11].**

Table 9: Tolerances for cartridge unit housings (C)

Unit 0.0001 in.

| Housing No. |      | Tolerance of a |     |      |     | Radial runout of outside surface (Max.) | Tolerance of l |
|-------------|------|----------------|-----|------|-----|---|----------------|
|             |      | C200           |     | CX00 |     |   |                |
|             |      | High           | Low | High | Low |   |                |
| C204        | --   | 0              | -12 | --   | --  | 79                                      | ±79            |
| C205        | CX05 |                |     | 0    | -14 |   |                |
| C206        | CX06 | 0              | -14 | 0    | -14 |   |                |
| C207        | CX07 |                |     | 0    | -14 |   |                |
| C208        | CX08 |                |     |      |     |   |                |
| C209        | CX09 | 0              | -16 | 0    | -14 | 118                                     | ±118           |
| C210        | CX10 |                |     | 0    | -16 |   |                |
| C211        | CX11 |                |     |      |     |   |                |
| C212        | CX12 | 0              | -16 | --   | --  | 118                                     | ±118           |
| C213        | --   |                |     |      |     |   |                |



Note: 1) a = outside diameter of cartridge housings.  
2) l = width of cartridge housings.

**2.7 Tolerances for standard castings.**

Table 10: Standard casted tolerances.

Unit: inches (mm)

| Nominal Dimensions | Up to 3.4 inches | 3.4 up to 7.87 inches | 7.87 up to 15.65 inches | 15.65 up to 31.50 inches |
|--------------------|------------------|-----------------------|-------------------------|--------------------------|
| Tolerances         | ±.039<br>(±1.0)  | ±.059<br>(±1.5)       | ±.098<br>(±2.5)         | ±.118<br>(±3.0)          |

Tolerances of thickness

Unit: inches (mm)

| Nominal Dimension | Up to .197 inches | .197 up to .394 inches | .394 up to .787 inches | .787 up to 1.181 inches | 1.181 up to 1.575 inches |
|-------------------|-------------------|------------------------|------------------------|-------------------------|--------------------------|
| tolerances        | ±.039<br>(±1.0)   | ±.059<br>(±1.5)        | ±.079<br>(±2.0)        | ±.118<br>(±3.0)         | ±.157<br>(±4.0)          |

Table 11: Machined tolerances For all machined tolerances not otherwise specified in this catalog.

Unit: inches (mm)

| Nominal dimension |        |       |        | Dimensional Tolerances |
|-------------------|--------|-------|--------|------------------------|
| Over              |        | Incl. |        |                        |
| mm                | in     | mm    | in     |                        |
| 4                 | 0.1575 | 16    | 0.6299 | ±.0118<br>(±.3)        |
| 16                | 0.6299 | 63    | 2.4803 | ±.0159<br>(±.4)        |
| 63                | 2.4803 | 250   | 9.8425 | ±.0197<br>(±.5)        |

# Engineering Data




### 3. Tolerances for pressed steel units.

Table 12: Tolerances for pressed steel housings [LL12].

Unit: 0.0001 in.

| Housing No.       | e    | s   | h    |
|-------------------|------|-----|------|
| PP-3Z TO PP-9Z    | ±118 | ±79 | ±100 |
| PF-3R TO PF-7R    |      |     |      |
| PFF-7R TO PFF-11R |      |     |      |
| PFL-3R TO PFL-7R  |      |     |      |

Note: 1) e = centerline dimension  
 2) s = bolt hole dimension  
 3) h = base to center height.

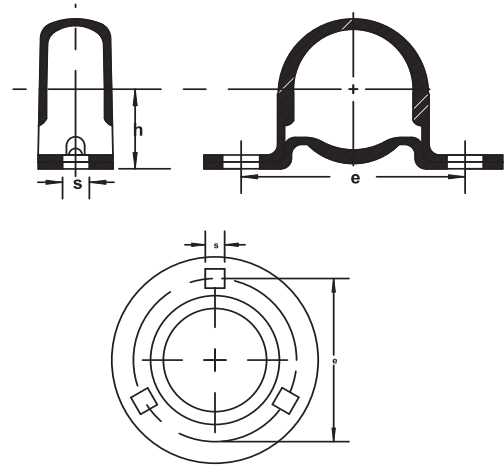

### 4. Suggested tolerances for shaft


Table 13: Shaft tolerances for cylindrical bore insert bearings.

Unit: 0.0001 in

| Shaft Diameter |        |       |        | Shaft Tolerances |     |      |     |      |     |      |     |      |     |      |     |
|----------------|--------|-------|--------|------------------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|
| Over           |        | Incl. |        | h7               |     | h8   |     | h9   |     | j7   |     | k6   |     | m6   |     |
| mm             | in     | mm    | in     | High             | Low | High | Low | High | Low | High | Low | High | Low | High | Low |
| 10             | 0.3937 | 18    | 0.7087 | 0                | -7  | 0    | -11 | 0    | -17 | +5   | -2  | +5   | 0   | +7   | +3  |
| 18             | 0.7087 | 30    | 1.1811 | 0                | -8  | 0    | -13 | 0    | -20 | +5   | -3  | +6   | +1  | +8   | +3  |
| 30             | 1.1811 | 50    | 1.9685 | 0                | -10 | 0    | -15 | 0    | -24 | +6   | -4  | +7   | +1  | +10  | +4  |
| 50             | 1.9685 | 80    | 3.1496 | 0                | -12 | 0    | -18 | 0    | -29 | +7   | -5  | +8   | +1  | +12  | +4  |
| 80             | 3.1496 | 120   | 4.7244 | 0                | -14 | 0    | -21 | 0    | -34 | +8   | -6  | +10  | +1  | +14  | +5  |
| 120            | 4.7244 | 140   | 5.5118 | 0                | -16 | 0    | -25 | 0    | -39 | +9   | -7  | +11  | +1  | +16  | +6  |

**4.1 Suggested shaft tolerances using set screw locking bearings.**


Table 14: Suggested shaft tolerances for set screw locking bearing units.

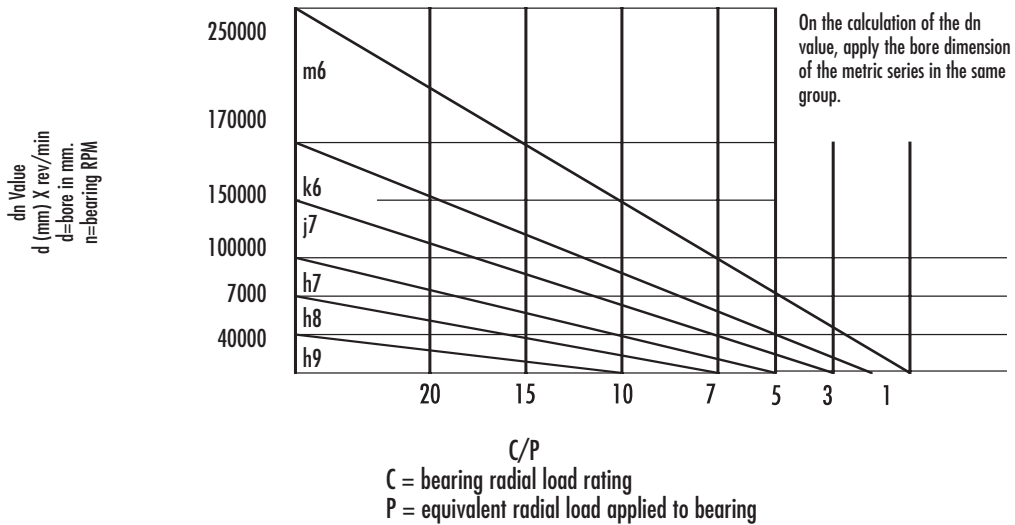

Note: For low speed and/or low load applications, loose fits are adequate. However, for higher speed and/or load applications, tighter fits are suggested.

**4.2 Suggested shaft tolerances using eccentric locking collar bearings.**

Table 15: Suggested shaft tolerances for eccentric locking collar bearing units.

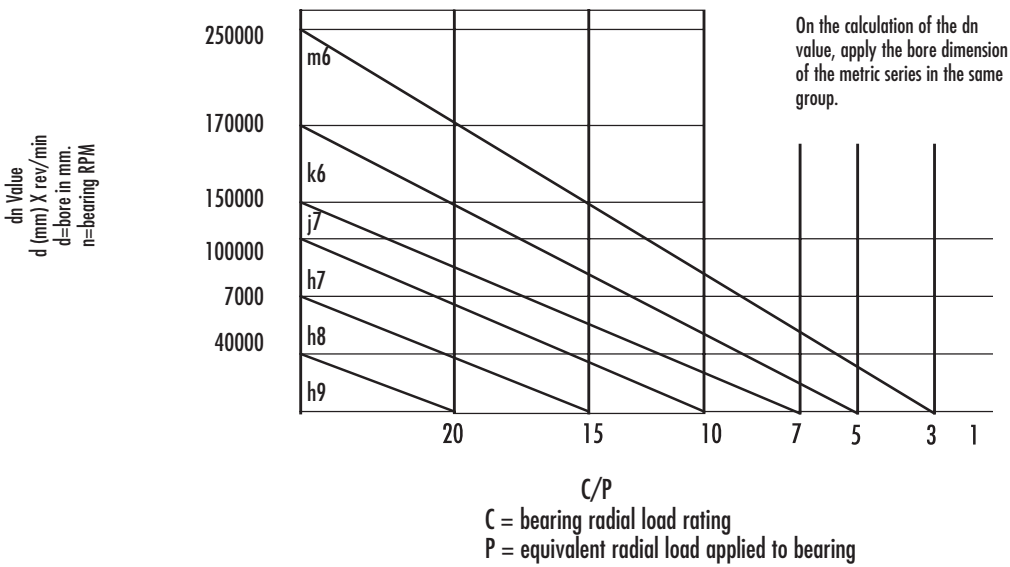

As in the case of the set screw system, it is usual under normal operating conditions, to fit the inner ring to the shaft by means of a clearance fit for ease of assembly.

Table 15.1: Eccentric locking collar shaft tolerance quick reference chart.

Unit: 0.0001 in.

| Shaft Diameter  | Shaft Tolerance |
|-----------------|-----------------|
| 1/2" - 1 15/16" | Nominal to -10  |
| 2" - 3 15/16"   | Nominal to -16  |

# Engineering Data



## D. Mounting

Locking to the shaft.

### Cylindrical bore bearings- Set screw locking.

For normal operating conditions, ball bearings are fixed to the shaft with socket head set screws as illustrated in figures 4 and 5. It is recommended that the shaft have flats or recesses in the areas where the set screws will contact it. This eliminates the formation of burrs on the shafting




Figure 4




Figure 5




Figure 6

Where vibration, shock and or thrust loads are anticipated, it is recommended that the shaft have a machined shoulder or auxiliary locking collar against which the bearing inner ring can be mounted. See figure 6. Set screws on cylindrical bore bearings should be tightened incrementally and firmly to prevent rotation of the shaft in the bearing bore. Tighten one set screw to sufficiently contact the shaft, then tighten the second set screw to the full torque requirement, and then tighten the first set screw to the full torque requirement. It is also recommended the set screws be re-tightened after 24 hours of operation. Tightening torque values are shown in table 16. Caution should be taken to not over tighten the set screws as this can cause inner ring distortion instigating an eccentric rotation and out of balance situation.

It is important to mention that PEER high frequency anneals the inner ring in the areas around the set screws. In addition to preventing cracking of the inner ring during set screw tightening, this allows the use of larger diameter set screws increasing the holding power. Set screw sizes and hex sizes are shown in table 16. PEER also uses a special set screw spacing to increase holding power of the set screws during operation.

Table 16: Tightening torque of set screws in set screw locking bearings.

| Bearing No. |         |             | Size         | Hex width | Tightening torque In-Lbs. |
|-------------|---------|-------------|--------------|-----------|---------------------------|
| UC/SER      | UCX     | FHS         |              |           |                           |
| 201-205     | X05     | 201-206     | 1/4-28x1/4   | 1/8       | 77.9                      |
| 201-205(mm) |         | 201-206(mm) | M6xP1.0      |           | 77.9                      |
| 206-209     | X06-X08 | 207-209     | 5/16-24x5/16 | 5/32      | 156                       |
| 206-209(mm) |         | 207-209(mm) | M8xP1.0      |           | 156                       |
| 210-213     | X10-X12 | 210-213(mm) | 3/8-24x3/8   | 3/16      | 273                       |
| 210-213(mm) |         |             | M10xP1.25    |           | 273                       |
| 214-217     | X13-X16 |             | 7/16-20x7/16 | 7/32      | 428                       |
| 214-217(mm) |         |             | M12xP1.5     |           | 428                       |
| 218         | X17     |             | 1/2-20x1/2   | 1/4       | 615                       |
| 218(mm)     |         |             | M12xp1.5     |           | 428                       |

Note: based on class 3A, alloy steel, knurled cup point set screws, cold forged with black oxide finish. Hardness value of 45-53 used in annealed inner rings with class 3B set screw holes. Other set screw styles and types are available upon request.

Table 16:a Stainless Steel Set Screw Tightening Torque Requirements

| Size    | Set Screw | Torque (in-lbs) |
|---------|-----------|-----------------|
| 201-206 | 1/4-28    | 54              |
| 207-209 | 5/16-24   | 110             |
| 210-212 | 3/8-24    | 205             |



### Cylindrical bore bearings-Eccentric locking collars.

Eccentric locking collar bearings are locked to the shaft by aligning the eccentric area of the collar against the corresponding eccentric area of the inner ring and rotating the collar in the direction of shaft rotation. Using a punch in the blind hole on the collar, tap the punch in the direction of shaft rotation. The eccentric locking collar will continually tighten during shaft rotation. Tightening the set screw in the locking collar to the shaft using the torque values shown in table 17 will provide limited holding power and is not to be relied upon solely for securing the shaft.

**Eccentric Locking collar bearings are to be used in single direction rotating applications only.** If a reversing rotation is desired or expected, set screw locking or "Grip-It" style bearings are required. If thrust or axial loads are expected on locking collar bearings, the use of a machined shoulder or auxiliary locking device is required.

Table 17: Tightening torque of set screw in eccentric locking collar.

| Eccentric Locking Collar | Inch Size            |                    |                   |
|--------------------------|----------------------|--------------------|-------------------|
|                          | Set screw Dimensions |                    | Tightening Torque |
|                          | UNF Threading        | Width across flats | In-Lbs.           |
| ER6004-6006              | 10-32x1/4            | 3/32               | 33.5              |
| ER201-203                | 1/4-28x1/4           | 1/8                | 77.9              |
| ER204                    | 1/4-28x1/4           | 1/8                | 77.9              |
| ER205                    | 1/4-28x1/4           | 1/8                | 77.9              |
| ER206                    | 5/16-24x5/16         | 5/32               | 156               |
| ER207-210                | 3/8-24x3/8           | 3/16               | 273               |
| ER211-213                | 7/16-20x7/16         | 7/32               | 428               |

*Note: Metric bore bearings use metric size set screws in the locking collars. See table 16 for tightening torque of metric size set screws.*

# Engineering Data



## ECCENTRIC LOCKING COLLAR ASSEMBLY PROCEDURES



Slide Shaft into bearing bore. Shaft must be straight, true and free of nicks and burrs. properly aligned in the housing.



Locate bearing/shaft on mounting surface. Mounting surface should be flat and stable. If needed, align bearing to insure it is



Secure housing to mounting surface.



If possible, rotate shaft by hand in direction of final rotation to insure the bearing turns freely and smoothly. Slide locking collar over shaft.



Engage locking collar by rotating Collar **IN DIRECTION OF SHAFT ROTATION** so the eccentricity of the collar mates with the eccentricity of the inner ring.



Insert a drift punch in blind hole of locking collar. Punch must be positioned so striking it rotates the collar **IN THE DIRECTION OF SHAFT ROTATION**



Using a lightweight hammer, strike Drift punch smartly to engage the Collar **IN THE DIRECTION OF SHAFT ROTATION**. (Illustration shown for counter-clockwise shaft rotation)



**DO NOT STRIKE PUNCH IN SUCH A MANNER AS TO EXERT FORCE STRAIGHT DOWN ONTO THE BEARING INNER RING.**



Tighten the set screw to prescribed torque.





### Cylindrical bore bearings-Concentric "Grip-It" bearings.

"GR" series or Grip-It bearings are locked to the shaft by tightening the concentric collar over the inner ring extension via the cap screw. As the cap screw is tightened, the collar compresses the inner ring extensions capturing the shaft in a concentric manner. Recommended cap screw torque values can be found in table 18.

This mounting style maintains superb shaft to bore concentricity eliminating vibration and fretting corrosion normally associated with insert bearings. In addition, since there is no screw intrusion into the shaft, there is no need to refinish or dress the shaft after removal or replacement of the Bearing.

Table 18: Grip-It series cap screw torque recommendations

| "GR" Grip-It Locking |                |             |                          |  |
|----------------------|----------------|-------------|--------------------------|--|
| Size                 | Cap Screw Size | Wrench Size | Tightening Torque in-lbs |  |
| GR204 – GR206        | 8-32           | T-25        | 55-60                    |  |
| GR207 – GR209        | 10-24          | T-27        | 70-80                    |  |
| GR210 – GR211        | 1/4-20         | T-30        | 140-160                  |  |
| GR212 – GR214        | 5/16-18        | T-45        | 340-360                  |  |
| GR215 – GR216        | 3/8-16         | T-50        | 400-550                  |  |

## 5 Greasing:

### 5.1 greasing intervals.

PEER mounted unit insert bearings are pre-lubricated at the factory and are ready for operation. Under normal operating conditions it is normal for a small amount of grease to purge from the seals during initial start up. This condition will stop once optimum grease fill has been obtained. Re-lubrication of PEER insert bearings is determined by operating conditions and environment. Greases used in re-lubricating PEER bearings should be NLGI # 2 compatible with a lithium thickener, mineral base oil and a temperature range of -10 to +260 degrees F. General greasing intervals based on RPM and operating conditions are shown in table 19. However, experience is the preferred method of determining greasing intervals and fill amounts.

Table 19: Greasing intervals.

| Type of unit   | dn value         | Environmental conditions | Operating temperature F | Relubrication Frequency |                   |
|----------------|------------------|--------------------------|-------------------------|-------------------------|-------------------|
|                |                  |                          |                         | Hours                   | Period            |
| Standard       | 40,000 and below | Ordinary                 | 5 to 176                | 1500 to 3000            | 6 to 12 months    |
| Standard       | 70,000 and below | Ordinary                 | 5 to 176                | 1000 to 2000            | 3 to 6 months     |
| Standard       | 70,000 and below | Ordinary                 | 176 to 212              | 500 to 700              | 1 month           |
| Heat-resistant | 70,000 and below | Ordinary                 | 212 to 284              | 300 to 700              | 1 month           |
| Heat-resistant | 70,000 and below | Ordinary                 | 284 to 338              | 300 to 700              | 1 month           |
| Heat-resistant | 70,000 and below | Ordinary                 | 338 to 392              | 100                     | 1 week            |
| Cold-resistant | 70,000 and below | Ordinary                 | 76 to 176               | 1000 to 2000            | 3 to 6 months     |
| Standard       | 70,000 and below | Very Dusty               | 5 to 212                | 100 to 500              | 1 week to 1 month |
| Standard       | 70,000 and below | Exposed to water         | 5 to 212                | 30 to 100               | Daily to weekly   |

$d$  = inner diameter of bearing (mm)

$n$  = speed in RPM

# Engineering Data



## 5.2 Grease fill amounts

Care should be taken when re-greasing bearings to avoid overfilling. Overfilling can lead to excessive heat and or unseating of the seals. Grease should be introduced in small increments and under light pressure. The use of pneumatic greasing equipment is not recommended unless low pressure is assured. Whenever possible, the shaft should be rotated during relubrication to insure proper grease distribution throughout the raceways.

The grease fill shown in table 20 provides a general rule for re-greasing amounts. However, it is preferred that experience dictates fill amounts due to wide variances in applications and operating environments.

Table 20: Grease fill amounts.

| Series  | Fill Amount |
|---------|-------------|
| 201-205 | 2 grams     |
| 206-208 | 3 grams     |
| 209-212 | 5 grams     |
| 213-218 | 8 grams     |

## 5.3 Grease fittings.

PEER offers many styles and types of grease fittings. Figure 7 illustrates some of the many styles and sizes PEER units can be equipped with. Optional fitting materials, thread designs and additional styles are available by special order. Table 21 shows the standard fitting sizes used on PEER units.

Table 21: Grease fitting equipped in PEER ball bearing mounted units.

| Bearing Number | Fitting Name | Thread Size |
|----------------|--------------|-------------|
| 203-209        | Zerk-1/4-28  | 1/4-28 UNF  |
| 210-218        | Zerk-PS-18   | 1/8-27 NPT  |

Note: Optional 90° and 45° fittings available.

Location of zerk hole on pillow block units.

PEER has the ability to locate the zerk hole in a wide variety of locations on the pillow block housings. Table 22 shows our standard location. See figure 8 and figure 9. Special locations are available by request.

Table 22: Location of zerk fitting on pillow block units.

| Unit no. | Location         |
|----------|------------------|
| 203-209  | Angle - Figure 8 |
| 210-218  | Top - Figure 9   |




Figure 7




Figure 8




Figure 9

### 5.4 Grease types.

PEER bearings are pre-lubricated with standard grease suitable for a wide variety of applications, speeds, temperatures and environments. Special greases are readily available. Shown in table 23 is a small sampling of standard and special greases offered.

Table 23: Greases and operating temperatures.

| Manufacturer trade name. | Recommended operating temperature range F | Properties |           |                 |                 |      |
|--------------------------|---|------------|-----------|-----------------|-----------------|------|
|                          |   | Thickener  | Base oil  | Water resistant | Viscosity CST @ |      |
|                          |   |            |           |                 | 40C             | 100C |
| Shell Alvania RL2        | -10 to +260                               | Lithium    | Mineral   | Yes             | 98              | 9.4  |
| Shell Alvania RL3        | 0 to +230                                 | Lithium    | Mineral   | Yes             | 98              | 9.4  |
| Exxon Polyrex EM         | -40 to +350                               | Polyurea   | Mineral   | Yes             | 115             | 12.2 |
| Chevron SRI #2           | -20 to +350                               | Polyurea   | Mineral   | Yes             | 110             | 11   |
| Chevron FM NLGI #2       | -40 to +300                               | Polyurea   | Mineral   | Yes             | 220             | 18   |
| Krytox 240AC / GPL       | -30 to +550                               | Synthetic  | Synthetic | Yes             | 270             | 26   |

*Note: Operating temperature, environment, RPM and load all play a role in selecting the appropriate grease for each application. Experience and field data are the best method of selecting the correct grease.*

### 6. Internal radial clearance.

Internal clearance between the balls and ball raceways in insert ball bearings permits interference fits on the bearing rings without preloading the bearings. In addition, the internal clearance is designed to allow for slight thermal expansion of the shafting in the inner ring and slight misalignment of the inner and outer rings. Proper internal clearance is particularly important for bearings operating at high speeds or under high temperatures and or loads.

Radial clearance can be defined as the average diameter of the outer ring raceway, minus the average diameter of the inner ring raceway, minus twice the ball diameter. The result is the amount of radial internal clearance. Generally, radial clearance is measured on assembled bearings by displacing the outer ring radially with respect to the inner ring under a reversing light gauge load. Table 24 shows the most common internal clearance classifications.

Table 24: Internal radial clearance for cylindrical bore insert bearings

Unit: 0.001mm / 0.0001 in.

| Nominal bore diameter d |        |       |        | Radial internal clearance |    |      |    |               |    |      |    |      |    |      |    |      |    |      |    |     |    |     |    |
|-------------------------|--------|-------|--------|---------------------------|----|------|----|---------------|----|------|----|------|----|------|----|------|----|------|----|-----|----|-----|----|
|                         |        |       |        | C2                        |    | C0   |    | Standard / C3 |    | C4   |    | C5   |    |      |    |      |    |      |    |     |    |     |    |
| Over                    |        | Incl. |        | min.                      |    | max. |    | min.          |    | max. |    | min. |    | max. |    | min. |    | max. |    |     |    |     |    |
| mm                      | in     | mm    | in     | mm                        | in | mm   | in | mm            | in | mm   | in | mm   | in | mm   | in | mm   | in | mm   | in | mm  | in |     |    |
| 10                      | 0.3937 | 18    | 0.7087 | 0                         | 0  | 9    | 4  | 3             | 1  | 18   | 7  | 11   | 4  | 25   | 10 | 18   | 7  | 33   | 13 | 25  | 10 | 45  | 18 |
| 18                      | 0.7087 | 24    | 0.9449 | 0                         | 0  | 10   | 4  | 5             | 2  | 20   | 8  | 13   | 5  | 28   | 11 | 20   | 8  | 36   | 14 | 28  | 11 | 48  | 19 |
| 24                      | 0.9449 | 30    | 1.1811 | 1                         | 0  | 11   | 4  | 5             | 2  | 20   | 8  | 13   | 5  | 28   | 11 | 23   | 9  | 41   | 16 | 30  | 12 | 53  | 21 |
| 30                      | 1.1811 | 40    | 1.5748 | 1                         | 0  | 11   | 4  | 6             | 2  | 20   | 8  | 15   | 6  | 33   | 13 | 28   | 11 | 46   | 18 | 40  | 16 | 64  | 25 |
| 40                      | 1.5748 | 50    | 1.9685 | 1                         | 0  | 11   | 4  | 6             | 2  | 23   | 9  | 18   | 7  | 36   | 14 | 30   | 12 | 51   | 20 | 45  | 18 | 73  | 29 |
| 50                      | 1.9685 | 65    | 2.5591 | 1                         | 0  | 15   | 6  | 8             | 3  | 28   | 11 | 23   | 9  | 43   | 17 | 38   | 15 | 61   | 24 | 55  | 22 | 90  | 35 |
| 65                      | 2.5591 | 80    | 3.1496 | 1                         | 0  | 15   | 6  | 10            | 4  | 30   | 12 | 25   | 10 | 51   | 20 | 46   | 18 | 71   | 28 | 65  | 26 | 105 | 41 |
| 80                      | 3.1496 | 100   | 3.9370 | 1                         | 0  | 18   | 7  | 12            | 5  | 36   | 14 | 30   | 12 | 58   | 23 | 53   | 21 | 84   | 33 | 75  | 30 | 120 | 47 |
| 100                     | 3.9370 | 120   | 4.7244 | 2                         | 1  | 20   | 8  | 15            | 6  | 41   | 16 | 36   | 14 | 66   | 26 | 61   | 24 | 97   | 38 | 90  | 35 | 140 | 55 |
| 120                     | 4.7244 | 140   | 5.5118 | 2                         | 1  | 23   | 9  | 18            | 7  | 48   | 19 | 41   | 16 | 81   | 32 | 71   | 28 | 114  | 45 | 105 | 41 | 160 | 63 |

*Note: Peer standard is C3 clearance for all ball bearing units except SER series, which utilizes C4 internal clearance.*

# Engineering Data



## 6.1 Load ratings

The load ratings shown in table 25a apply to all PEER deep groove, mounted unit, ball bearings manufactured using 52100 bearing grade steel. See table 25b for load ratings of PEER stainless steel bearings.

Load ratings for cylindrical bore UC, HC, FHS, FHSR, FH, FHR, GR and SER series bearings are identical. The load ratings in table 25a have been calculated per ABMA standard 9-1990 and conform to ISO standard 281.

Table 25a; Load rating data 52100 steel bearings.

Unit: Lbf

| Bearing Number |           |         |         |         |     |        | Basic Load Rating |              |
|----------------|-----------|---------|---------|---------|-----|--------|-------------------|--------------|
| UC             | HC        | GR      | FH      | FHS     | UCX | SER    | Dynamic (Cr)      | Static (Cor) |
| 2015-203S      | 2015-203S |         | 201-203 | 201-203 |     |        | 2160              | 1000         |
| 201-204        | 201-204   | 201-204 | 204     | 204     |     | 8-12   | 2900              | 1410         |
| 205            | 205       | 205     | 205     | 205     |     | 14-16  | 3150              | 1610         |
| 206            | 206       | 206     | 206     | 206     | X05 | 17-20s | 4370              | 2320         |
| 207            | 207       | 207     | 207     | 207     | X06 | 20-23  | 5770              | 3150         |
| 208            | 208       | 208     | 208     | 208     | X07 | 24-25  | 7340              | 3650         |
| 209            | 209       | 209     | 209     | 209     | X08 | 26-28  | 7350              | 4150         |
| 210            | 210       | 210     | 210     | 210     | X09 | 29-31  | 7880              | 4650         |
| 211            | 211       | 211     | 211     | 211     | X10 | 32-25  | 9740              | 5850         |
| 212            | 212       | 212     |         |         | X11 | 36-39  | 11780             | 7250         |
| 213            | 213       |         |         |         | X12 | 40     | 13980             | 8000         |
| 214            | 214       |         |         |         | X13 |        | 14000             | 8800         |
| 215            | 215       |         |         |         | X14 |        | 14830             | 9750         |
| 216            | 216       |         |         |         | X15 |        | 16280             | 10500        |

*NOTE: These dynamic load ratings (Cr) are based on an interference shaft fit. ABMA standard 9-1990 recommends that for slip or loose shaft fits, divide the basic dynamic load rating (Cr) by 1.3 to obtain the de-rated value. For PEER GR series bearings, where shaft to bore concentricity is maintained, the de-rating factor can be reduced to 1.1 or eliminated depending on application parameters.*

Table 25b: Load Rating data Stainless Steel Bearings

Unit: Lbf

| Bearing Number |      | Load Rating |            |
|----------------|------|-------------|------------|
| SUC            | SFHS | Cr Dynamic  | Cor Static |
| 204            | 204  | 2227        | 1500       |
| 205            | 205  | 2425        | 1763       |
| 206            | 206  | 3373        | 2535       |
| 207            | 207  | 4431        | 3439       |
| 208            | 208  | 5026        | 4012       |
| 209            | 209  | 5666        | 4586       |
| 210            | 210  | 6063        | 5225       |
| 211            | 211  | 7496        | 5622       |
| 212            | 212  | 9039        | 6944       |



## E. Load Capacity and Life

Many factors influence the selection of a bearing for a particular application. The most common of these is the selection of a bearing based on its load carrying capacity and life calculations. A numerical value termed BASIC LOAD RATING has been assigned each insert bearing to be used in the life calculations. Values for the basic dynamic ( $C_r$ ) and static ( $C_{or}$ ) load capacity can be found in table 25 and on the individual insert bearing dimension pages of this catalog.

### 1) Basic Load Rating

The basic dynamic load rating ( $C_r$ ) is used in calculations involving dynamically stressed bearings, when selecting a bearing which is to rotate under a radial load. This load rating expresses the dynamic load a specific bearing will operate under for a life of 1,000,000 revolutions (33 1/3 RPM for 500 hours).

### 2) Life

The life of an individual bearing is defined as the number of revolutions which the bearing is capable of enduring before fatigue occurs on the rings or balls.

Dynamic load ratings are based on the life that 90% of a group of identical bearings can be expected to reach or exceed. The majority of PEER bearings attain much longer life than this. The median life is approximately five times the calculated life rating.

### 2.1) Life calculation

The relationship between the basic rating life, the basic dynamic load rating and the applied load is expressed by the equation:

$$L_{10} = (C_r/P)^p$$

Where

$L_{10}$  = basic rating life in millions of revolutions.

$C_r$  = basic dynamic load rating, Lbf.

$P$  = equivalent dynamic applied load, Lbf.

$p$  = exponent for the life equation. For ball bearings the  $p$  value is 3.

For bearings operating under a steady applied load and at a constant speed, a basic life expressed in operating hours uses the equation:

$$L_{10h} = (C_r/P)^3 \times 16667/n$$

Where

$L_{10h}$  = basic life in operating hours

$n$  = operating speed, RPM.

The basic rating life expressed as either  $L_{10}$  or  $L_{10h}$  should be used when selecting a bearing size.

Example 1: Determining  $L_{10h}$  life.

An UC205-16 bearing is operating at 700 RPM with an applied radial load of 350 Lbf. The calculation for minimum ( $L_{10h}$ ) is;

From table 25 we know an UC205-16 bearing has a basic dynamic load rating ( $C_r$ ) of 3150 Lbf. Therefore  $(C_r/P)^3 = (3150/350)^3$  or 729. Given the RPM of 700 we know  $16667/700 = 23.81$ . Therefore,  $729 \times 23.81 = 17,357.5$  hours.

Example 2: Selecting a bearing.

A bearing is required to operate under a radial load ( $P$ ) of 674 Lbf. At a constant speed of 2000 RPM and achieve a  $L_{10h}$  life of 15,000 hours. To select the bearing we use the equation;

$$C_r = P \times ((L_{10} \times \text{RPM}) / 16,667)^{1/3} \text{ or } 674 \times ((15,000 \times 2000) / 16667)^{1/3} \text{ or } C_r = 8199 \text{ Lbf.}$$

Using this information and table 24 we find we need to use a bearing of size 211 at minimum to achieve this.

Example 3: Finding maximum load ( $P$ ).

An UC204-12 bearing is to achieve a  $L_{10h}$  of 10,000 hours while operating at 1500 RPM. To calculate the maximum steady radial load we can apply use the formula;

$$P = C_r / ((L_{10} \times \text{RPM}) / 16667)^{1/3} \text{ or } P = 2900 / ((10,000 \times 1500) / 16667)^{1/3} \text{ or } P = 300 \text{ Lbf.}$$



## 2.2 Static load rating

In cases where the bearings are to rotate at relatively low speeds, have slow oscillating movements, or are exposed to shock loads, a basic static ( $C_{or}$ ) load rating must be taken into consideration.

### 2.21 Thrust Load rating

PEER inserts are manufactured to the same standards as deep groove Conrad bearings and therefore designed mainly for radial loads. While they will accept a certain amount of thrust or axial loading their core intent is for radial loading. In cases where there is a thrust or axial load applied to PEER insert bearings, it is desired that the thrust load be less than 1/3 of the bearings basic dynamic load rating ( $C_r$ ) value. In no case should the thrust load exceed the bearings static load capacity ( $C_{or}$ ) value.

### 2.22 Combined loads.

Deep groove ball bearings are designed to accept a radial load. However, they are capable of handling a small degree of axial or thrust load in addition to the radial load.

In applications where both a radial and axial load is acting on a bearing, a combined load value needs to be used in the life calculations. This equivalent dynamic radial load is defined as the hypothetical load, constant in magnitude and direction, acting radially on insert radial bearings, which would have the same influence on bearing life as the actual loads to which the bearing is to be subjected. Assuming constant load,  $P_o = C_1(xF_r + yF_a)$  where  $C_1$  = impact factor,  $f_r$  = the radial load and  $f_a$  = the axial load,  $x$  and  $y$  vary depending on the  $F_a/C_{or}$  and  $F_a/F_r$  ratios. Table 27 shows  $C_1$  or impact factors and Table 27a shows the  $x$  and  $y$  factors.

Table 27: Impact Factors

| Type of Load       | $C_1$ |
|--------------------|-------|
| Constant or steady | 1.0   |
| Light shocks       | 1.5   |
| Moderate shocks    | 2.0   |
| Heavy shocks       | 3.0 + |

Table 27a: Radial and axial factors  $x$  and  $y$  for determining equivalent bearing load for ball bearings.

| $F_a/C_{or}$ | $e$  | $F_a/F_r \leq e$ |     | $F_a/F_r \geq e$ |      |
|--------------|------|------------------|-----|------------------|------|
|              |      | $x$              | $y$ | $x$              | $y$  |
| 0.014        | 0.19 | 1                | 0   | 0.56             | 2.30 |
| 0.028        | 0.22 |                  |     |                  | 1.99 |
| 0.056        | 0.26 |                  |     |                  | 1.71 |
| 0.084        | 0.28 |                  |     |                  | 1.55 |
| 0.11         | 0.30 |                  |     |                  | 1.45 |
| 0.17         | 0.34 |                  |     |                  | 1.31 |
| 0.28         | 0.38 |                  |     |                  | 1.15 |
| 0.42         | 0.42 |                  |     |                  | 1.04 |
| 0.56         | 0.44 |                  |     |                  | 1.00 |

*Note: It is not recommended that  $F_a$  exceed 1/3 of the basic dynamic load rating ( $C_r$ ) from table 25. If  $F_a$  is greater than or equal to 1/3 of the basic load rating ( $C_r$ ) from table 25, consult Peer engineering department. In no instances should  $F_a$  exceed the bearings static load capacity  $C_{or}$ .*

# Engineering Data



## 2.3 Variable load and speed.

In applications with a constant speed, where the load grows linearly from a minimum value ( $P_{min}$ ) to a maximum ( $P_{max}$ ), then drops back to the minimum value, the average load is;

$$P_m = (P_{min} + 2P_{max}) / 3$$

Where  $P_m$  = equivalent dynamic bearing load in Lbs.

$P_1$  = constant load at  $n_1$  RPM for  $T_1$  minutes.

$P_2$  = constant load at  $n_2$  RPM for  $T_2$  minutes.

$P_n$  = constant load at  $n_n$  RPM for  $T_n$  minutes.

$n$  = RPM

$T$  = Time

When a bearing is subjected to consecutive runs at different constant speeds and different periods of load application, the ideal constant load  $P_m$  can be calculated by:  $P_m = ((P_1^3 \times n_1 \times T_1) + (P_2^3 \times n_2 \times T_2) + \dots + (P_n^3 \times n_n \times T_n)) / ((n_1 \times T_1) + (n_2 \times T_2) + \dots + (n_n \times T_n))^{1/3}$

## 2.4 Life Adjustment Factors, $a_1$ , $a_2$ , $a_3$ for insert ball bearings.

$a_1$ , Life adjustment factor for reliability.

$L_{10}$  is the life based upon a 90% or greater survival rate of a group of bearings. When the application requires a higher reliability the  $a_1$  adjustment factor can be obtained from table 28.

Table 28

| Reliability % | $L_n$    | Factor $a_1$ |
|---------------|----------|--------------|
| 90            | $L_{10}$ | 1            |
| 95            | L5       | 0.62         |
| 96            | L4       | 0.53         |
| 97            | L3       | 0.44         |
| 98            | L2       | 0.33         |
| 99            | L1       | 0.21         |

$a_2$ , Life adjustment factors for bearing materials.

Adjustments for special bearing steel properties such as low impurity levels, heat treating, etc. is covered under adjustment  $a_2$ . However, per ABMA standard 9-1990 7.4.2, this is not sufficient justification for an  $a_2$  value greater than 1. Therefore, the  $a_2$  factor for Peer insert bearings will remain consistent at 1 as shown in table 29.

Table 29

| Bearing Steel                           | Factor $a_2$ |
|---|--------------|
| PEER vacuum degassed 52100 chrome steel | 1            |

$a_3$ , life adjustment for operating conditions.

The  $a_3$  adjustment factor is the result of any number of operating factors the end user wishes to consider in the life analysis. These include but are not limited to, cleanliness of environment, temperature, viscosity of lubrication, shaft size and alignment. These factors combined reflect the  $a_3$  adjustment factor. However, in calculating the  $a_3$  for insert ball bearings with slip fit shafts and set screw or eccentric locking collars, it is accepted that  $a_3$  will equal 0.456 per ABMA Standard 9-1990 7.5.4. This is the result of the mounting and assembly methods insert bearings with slip fit shafts employ. Since there is normally a slip fit between the bearing bore and shaft diameter for set screw and eccentric locking collar insert bearings, the  $a_3$  will be consistent at 0.456. For Peers' "GR" series Grip-It bearings, which maintain a concentric shaft to bore alignment, the  $a_3$  factor may be increased to 0.800. If the basic dynamic load rating ( $C_r$ ) used in the  $L_{10}$  or  $L_{10h}$  calculation has already been de-rated, there is no need for further de-ration under the  $a_3$  adjustment factor.

The above 3 adjustment factors can be added to the  $L_{10}$  life calculation by the formula;  $L_{na} = (a_1 \times a_2 \times a_3) L_{10}$



**2.5 Calculating Applied Loads (P):**


The applied load acting on a bearing is a primary factor in selecting the appropriate bearing and calculating L10 life for a given application. For proper insert bearing selection and L10 life calculations, it is necessary to know the applied load(s) in a given application. These loads may be any one or a combination of the following factors;

1. Weights of components being supported by the bearings.
2. Tightness or tension from chain or belt pressure.
3. Vibration, varying loads or eccentricity of rotation.

To correctly calculate the applied load(s) it is necessary to know the;

1. Amount of the load.
2. Load direction.
3. Distances between support bearings and loads.


Once these factors are known, one of the following calculations can be employed;

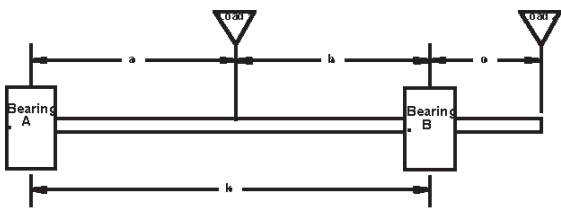

$$\text{Load on Bearing A} = \frac{(\text{Load 1} \times b) - (\text{Load 2} \times c)}{k}$$

$$\text{Load on Bearing B} = \frac{(\text{Load 1} \times a) + (\text{Load 2} \times c)}{k}$$


OR

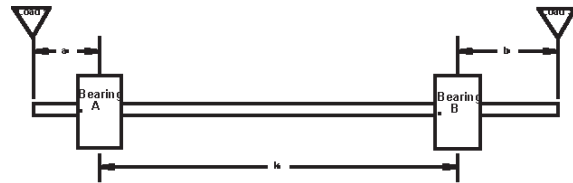

$$\text{Load on Bearing A} = \frac{\text{Load 1} \times (a + k) - (\text{Load 2} \times b)}{k}$$

$$\text{Load on Bearing B} = \frac{(\text{Load 2} \times (k + b) - (\text{Load 1} \times a))}{k}$$

OR

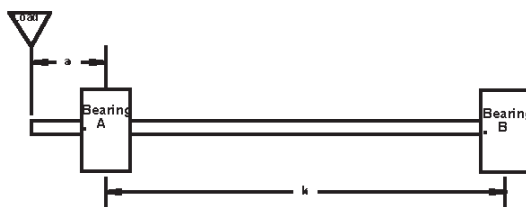

$$\text{Load on Bearing A} = \frac{\text{Load 1} \times (a + k)}{k}$$

$$\text{Load on Bearing B} = \frac{(\text{Load 1} \times a)}{k}$$

**Vibratory Loads;**

For applications where there is an applied eccentric motion or vibration is designed into the design, it is necessary to calculate the effective force acting on the bearings resulting from this motion. This is calculated through the basic physics law of centrifugal force or "Force = Mass x Acceleration" using the equation

$$F = .000341 \times W \times (R/12) \times (N)^2 \text{ where;}$$

F = load

W = weight of rotating component in lbs.

R = radius of rotation in inches

N = RPM of shaft.

Example: the centrifugal load acting on a bearing operating under a vibratory rotation consisting of 1500 lbs weight with rotation radius of .125"(1/8") at 500 RPM is;  $F = .000341 \times 1500 \times .125/12 \times (500)^2 = 1332\text{lbs}$

# Engineering Data



**Limiting Speeds:**

Table 30 lists the limiting speeds or maximum allowable RPM a bearing can operate at. The values listed in table 30 represent set screw or eccentric locking collar bearings with slip fit shafts and a 40% - 50% lubricant fill. For "GR" or Grip-It style 360o locking bearing or bearings with press fit shafts, these values can be increased 30% or multiplied by a value of 1.3.

Speed limits are greatly influenced by the bearings seal design and therefore, the more seal contact the lower the allowable maximum speed rating. All limiting speeds are based on horizontally mounted shafts and radial loads.

Table 30:

| Ring Size | Shaft Size | "Z" Shield | "R" seal | "RST" Seal | "Y" Seal | "DBL" Seal | "TRL" Seal |
|-----------|------------|------------|----------|------------|----------|------------|------------|
| 201-203   | 1/2        | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 12mm       | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 9/16       | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 5/8        | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 15mm       | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 11/16      | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 17mm       | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
| 204       | 3/4        | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 13/16      | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
|           | 20mm       | 7300       | 6500     | 6500       | 1950     | 1463       | 650        |
| 205       | 13/16      | 6500       | 5850     | 5850       | 1755     | 1316       | 585        |
|           | 7/8        | 6500       | 5850     | 5850       | 1755     | 1316       | 585        |
|           | 15/16      | 6500       | 5850     | 5850       | 1755     | 1316       | 585        |
|           | 1          | 6500       | 5850     | 5850       | 1755     | 1316       | 585        |
|           | 25mm       | 6500       | 5850     | 5850       | 1755     | 1316       | 585        |
| 206 (X05) | 1 1/16     | 5500       | 5000     | 5000       | 1500     | 1125       | 500        |
|           | 1 1/8      | 5500       | 5000     | 5000       | 1500     | 1125       | 500        |
|           | 1 3/16     | 5500       | 5000     | 5000       | 1500     | 1125       | 500        |
|           | 1 1/4 (s)  | 5500       | 5000     | 5000       | 1500     | 1125       | 500        |
|           | 30mm       | 5500       | 5000     | 5000       | 1500     | 1125       | 500        |
| 207 (X06) | 1 1/4      | 4700       | 4300     | 4300       | 1290     | 968        | 430        |
|           | 1 5/16     | 4700       | 4300     | 4300       | 1290     | 968        | 430        |
|           | 1 3/8      | 4700       | 4300     | 4300       | 1290     | 968        | 430        |
|           | 1 7/16     | 4700       | 4300     | 4300       | 1290     | 968        | 430        |
|           | 35mm       | 4700       | 4300     | 4300       | 1290     | 968        | 430        |
| 208 (X07) | 1 1/2      | 4200       | 3750     | 3750       | 1125     | 844        | 375        |
|           | 1 9/16     | 4200       | 3750     | 3750       | 1125     | 844        | 375        |
|           | 40mm       | 4200       | 3750     | 3750       | 1125     | 844        | 375        |
| 209 (X08) | 1 5/8      | 3800       | 3400     | 3400       | 1020     | 765        | 340        |
|           | 1 11/16    | 3800       | 3400     | 3400       | 1020     | 765        | 340        |
|           | 1 3/4      | 3800       | 3400     | 3400       | 1020     | 765        | 340        |
|           | 45mm       | 3800       | 3400     | 3400       | 1020     | 765        | 340        |
| 210 (X09) | 1 15/16    | 3600       | 3300     | 3300       | 990      | 743        | 330        |
|           | 2 (s)      | 3600       | 3300     | 3300       | 990      | 743        | 330        |
|           | 50mm       | 3600       | 3300     | 3300       | 990      | 743        | 330        |
| 211 (X10) | 2          | 3300       | 3000     | 3000       | 900      | 675        | 300        |
|           | 2 1/8      | 3300       | 3000     | 3000       | 900      | 675        | 300        |
|           | 2 3/16     | 3300       | 3000     | 3000       | 900      | 675        | 300        |
|           | 55mm       | 3300       | 3000     | 3000       | 900      | 675        | 300        |
| 212 (X11) | 2 1/4      | 3000       | 2700     | 2700       | 810      | 608        | 270        |
|           | 2 3/8      | 3000       | 2700     | 2700       | 810      | 608        | 270        |
|           | 2 7/16     | 3000       | 2700     | 2700       | 810      | 608        | 270        |
|           | 60mm       | 3000       | 2700     | 2700       | 810      | 608        | 270        |
| 213 (X12) | 2 1/2      | 2600       | 2350     | 2350       | 705      | 529        | 235        |
|           | 2 9/16     | 2600       | 2350     | 2350       | 705      | 529        | 235        |
|           | 65mm       | 2600       | 2350     | 2350       | 705      | 529        | 235        |
|           | 214 (X13)  | 2 5/8      | 2500     | 2250       | 2250     | 675        | 506        |
| 2 11/16   | 2500       | 2250       | 2250     | 675        | 506      | 225        |            |
| 2 3/4     | 2500       | 2250       | 2250     | 675        | 506      | 225        |            |
| 70mm      | 2500       | 2250       | 2250     | 675        | 506      | 225        |            |
| 215 (X14) | 2 7/8      | 2300       | 2100     | 2100       | 630      | 473        | 210        |
|           | 2 15/16    | 2300       | 2100     | 2100       | 630      | 473        | 210        |
|           | 3          | 2300       | 2100     | 2100       | 630      | 473        | 210        |
|           | 75mm       | 2300       | 2100     | 2100       | 630      | 473        | 210        |