


# 6 PRESSED RADIAL BEARING w/HOUSING(1/2)

Part No.	Dimension (mm)					Type	Load Rat.(kgf)		Weight Net(g)	Q'ty/ Carton	Remarks
	D	D'	d	B	L		Cr	Cor			
PCO166E-SUS	16.6	19.0	6.2	7.6	10.0	7	2	1			All Stainless Steel
PCO166E	16.7	18.5	6.2	7.6	10.0	7	10	5	6.50	2,000	
PCA198E	19.8	22.2	6.2	10.0	14.0	1	28	15	14.94	1,000	
PCA22E-B	22.0	25.0	6.2	10.0	14.0	1	29	21	15.10		
PCO261ED-4.0	26.1	28.5	8.1	9.5	13.5	8	10	6	20.02	1,000	
PCO294ED	29.4	31.5	8.3	9.2	14.2	8	18	11	25.00	1,000	
PCA306E	30.6	33.5	12.2	13.0	17.0	1	80	53	45.03	1,000	
PCA336ED	33.6	38.0	12.2	11.0	16.0	2	35	26	39.61		
PCR35ED-6.5	35.2	38.0	12.0	11.0	17.5	11	59	29	36.05		6901ZZ Bearing inserted
PCO352ED	35.2	38.0	12.2	9.0	14.0	8	21	16	33.31		d=8.2 available
PCA35ED	35.7	38.0	12.2	11.0	16.0	2	26	19	44.61		
PCO35ED-SUS	35.7	38.0	12.2	9.0	13.0	8	8	6	28.81	500	All Stainless Steel
PCR362ED-6.5	35.9	41.7	12.0	11.0	17.5	11	59	29	35.95		6901ZZ Bearing inserted
PCR362ED-NS	35.9	41.7	12.2	11.0	17.5	9	21	12	42.42	400	with Polyamide Retainer
PCR36ED-NS	36.3	40.5	12.2	11.0	17.5	9	21	12	41.32		with Polyamide Retainer
PCO377ED	37.7	42.5	12.2	9.0	15.5	8	21	16	39.81		
PCR39ED-NS	39.2	42.5	12.2	11.0	17.5	9	21	12	42.92	400	with Polyamide Retainer
PCR395ED-6.5	39.5	42.5	12.0	12.7	19.2	11	104	48	53.00		6001ZZ Bearing inserted
PCR39ED	39.5	42.5	12.1	12.7	17.7	9	35	20	42.82	400	with Polyamide Retainer
PCO395ED	39.5	42.5	12.2	12.0	17.2	8	90	70	52.23		
PCO39E-B SUS	39.7	42.7	12.1	9.0	15.5	8	8	6			All Stainless Steel
PCO399ED	39.9	42.5	12.2	9.0	14.0	8	21	16	36.31	400	
PCO120S-A	40.7	44.0	11.8*	10.0	14.0	10	90	70	53.34	400	d=12.1 available
PCO419ED	41.9	43.5	12.2	9.0	14.0	8	21	16	38.31	400	
PCA422ED-4.0	41.9	44.0	8.2	10.0	14.0	2	20	12	36.16		
PCN842	42.0	43.5	8.1	25.0	32.0	6	10	?		300	
PCA42ED	42.3	45.0	8.1	11.0	18.0	2	25	15	41.14		
PCO436ED-4.0	43.6	48.6	12.2	9.0	13.0	8	21	16	41.36	300	
PCO44E-A	44.1	48.5	12.2	12.0	14.7	8	94	76	66.77		
PCR45E-B	45.0	48.2	12.0	10.5	17.0	11	104	48	56.00		6001ZZ Bearing inserted
PCR45E-AS	45.0	48.2	12.1	10.5	17.0	9	35	20	51.82		
PCO45E-A	45.0	48.2	12.2	9.0	15.5	8	21	16	46.81		
PCO45ED	45.6	48.8	12.2	12.0	17.0	8	90	70	62.24	300	
PCA470EE	47.0	50.0	8.2	9.0	13.0	2	21	13	35.54		d=6.0 ,9.2 ,10.2 available
PCO47E-A SUS	47.0	50.0	12.1	9.0	15.5	8	8	6			All Stainless Steel

\* shows dimension of the opposite side

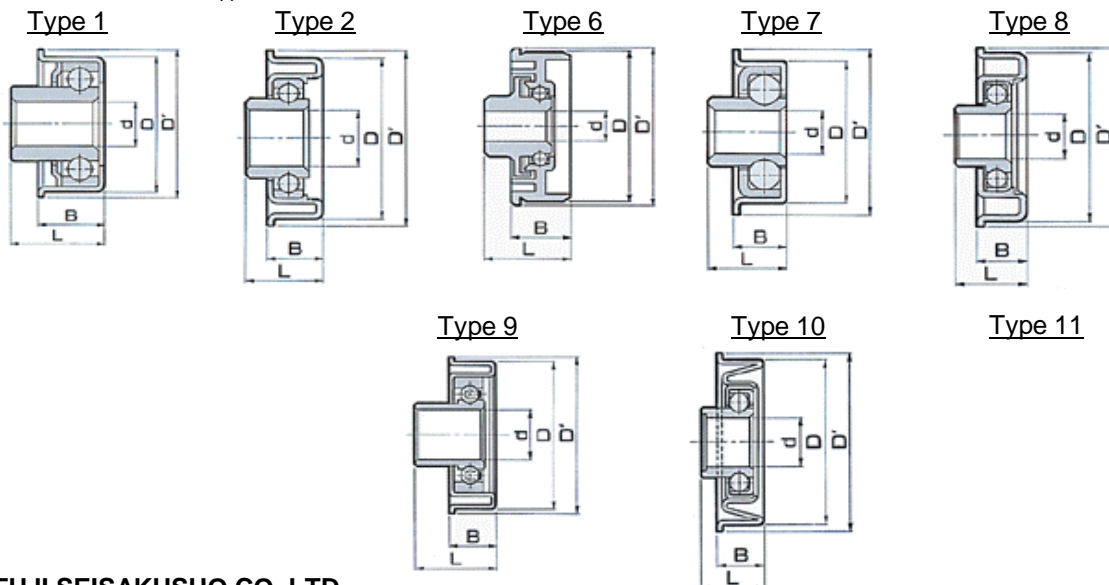







## FUJI SEISAKUSHO CO. LTD.

Minamisenba No.2 Daiji Bldg.  
 No. 1-10, 3-chome, Minamisenba  
 Chuo-ku, Osaka 542-0081 Japan  
 Phone : 81-6-6243-3771 / Fax : 81-6-6243-6445 / e-mail : info@fuji-bearing.com

# 6 PRESSED RADIAL BEARING w/HOUSING(2/2)

Part No.	Dimension (mm)					Type	Load Rat.(kgf)		Weight Net(g)	Q'ty/ Carton	Remarks
	D	D'	d	B	L		Cr	Cor			
PCE473FW	47.3	50.0	M10.0	15.0	22.2	5	-	-			
PCE47F	47.5	50.8	11.8*	12.7	15.0	3	95	62	88.83		d=10.0 ,11.2 ,12.1 available
PCO120S-B	47.5	50.8	11.8*	12.7	16.7	10	90	70	68.34	300	d=12.1 available
PCA515ED	51.5	56.5	17.2	15.0	20.0	2	155	119	118.24		
PCR52ED-6.5	52.1	54.6	12.0	14.2	20.7	11	166	74	90.10		6201ZZ Bearing inserted
PCO52ED-RS	52.1	54.6	12.2	14.2	54.6	8	87	56	88.12	200	Single Seal
PCR52ED	52.1	54.6	17.2	14.0	20.5	9	166	108	112.33		with Retainer
PCR533ED	53.1	57.0	12.0	14.9	14.9	9	173	77	61.00	200	6201ZZ Bearing inserted
PCR533ED-6.5	53.1	57.0	12.0	14.9	21.4	11	173	77	102.33		6201ZZ Bearing inserted
PCR53ED	53.1	57.3	17.2	14.0	20.1	9	166	108	139.33		with Felt
PCA532ED	53.2	57.0	12.2	12.7	19.2	2	74	56	85.14		
PCA53ED	53.2	57.0	17.2	12.7	16.7	2	107	87	89.27		d=12.2 ,15.2 available
PCE540F	54.0	57.0	20.0	12.0	16.0	3	124	105	106.17	200	
PCR54ED-NS	54.2	56.5	12.2	11.0	17.5	9	21	12	53.42		with Polyamide Retainer
PCA54ED	54.3	57.0	12.2	12.7	16.7	2	74	56	77.19		
PCA55ED	54.8	60.5	17.2	12.7	16.7	2	107	87	97.27		d=12.2 , D=58.0 available
PCO56ED	55.2	60.5	20.3	14.0	18.0	8	102	90	104.45	200	
PCO56ED-SUS	55.2	60.5	20.3	14.0	18.0	8	34	30		200	All Stainless Steel
PCR1256ED-6.5	56.0	59.3	12.0	12.7	19.2	11	130	60	88.44		6001ZZ Bearing inserted
PCA56ED-6.5	56.0	59.3	12.1	12.7	19.2	2	97	73	98.00	200	
PCR1256ED	56.0	59.3	12.1	12.7	19.2	9	57	33	86.57		with Retainer
PCO120S-C	57.2	60.5	11.8*	12.7	16.7	10	90	70	74.34	200	d=12.1 available
PCE57F	57.2	60.5	11.8*	12.7	15.0	3	95	62	118.92	200	d=12.1 available
PCO1257ED-SUS	57.5	60.5	12.2	14.0	19.0	9	36	23	21.87	200	All Stainless Steel
PCR58ED-NS	57.7	60.8	12.2	11.0	17.5	9	28	16	65.92	200	with Polyamide Retainer
PCO120S-F	59.5	62.7	11.8*	12.7	16.7	10	90	70	89.33		d=12.1 available
PCR62ED-NS	62.5	65.6	12.2	11.0	17.5	9	28	16	71.42	150	with Polyamide Retainer
PCO120S-D	65.0	68.2	11.8*	12.7	18.7	10	90	70	93.34	150	d=12.1 available
PCR68ED-9.4	66.9	73.0	17.0	16.0	25.4	11	152	82	172.50		6003ZZ Bearing inserted
PCR68ED	66.9	73.0	20.1	17.0	26.4	9	205	139	241.26	80	with Felt
PCO68ED	66.9	73.0	20.1	17.0	24.0	8	203	159	243.06	80	
PCR67ED-NS	67.2	70.3	12.2	11.0	17.5	9	28	16	76.42	150	with Polyamide Retainer
PCE700FR	70.0	72.5	20.0	12.0	16.0	3	124	105	150.86		
PCA71ED	70.7	76.3	17.2	13.0	18.0	2	128	98	119.55	100	
PCO120S-E	71.5	74.7	11.8*	12.7	18.7	10	90	70	101.34	100	HEX bore
PCR72ED-NS	72.0	75.1	12.2	11.0	17.5	9	28	16	83.42	100	with Polyamide Retainer
PCR76ED-NS	75.8	79.0	12.2	11.0	17.5	9	28	16	86.93	100	with Polyamide Retainer
PCE830FR	83.0	86.0	20.0	12.0	16.0	3	124	105	205.67	100	

\* shows dimension of the opposite side



Type 11

**FUJI SEISAKUSHO CO. LTD.**

Minamisenba No.2 Daiji Bldg.  
 No. 1-10, 3-chome, Minamisenba  
 Chuo-ku, Osaka 542-0081 Japan  
 Phone : 81-6-6243-3771 / Fax : 81-6-6243-6445 / e-mail : info@fuji-bearing.com