

IKO

Precision Positioning Table LH

TSLH・CTLH

CAT-57114

High rigidity series newly introduced !





Super Large Size *is included.*

HIGH RIGIDITY SERIES !

Table width 120・220・320・420mm



Precision Positioning Table LH

TSLH·CTLH

<Single axis specification>

<Two axis specification>

Stable Running Accuracy

High Positioning Accuracy

Large Loading Weight




IKO Precision Positioning Table LH

TSLH・CTLH

IKO Precision Positioning Table LH is a positioning table, featuring high reliability, high accuracy, and high rigidity. **IKO** Linear Ways are assembled on a slide table and bed made of cast iron which are designed to have high rigidity and superior vibration damping characteristics, and a precision ball screw is assembled in the drive mechanism. With the parallel arrangement of two sets of Linear Ways, this table provides stable and high running accuracy and positioning accuracy, as well as a high load capacity.

Four sizes with table widths ranging from 120 mm to super large size 420 mm are available. Two axis tables which combine these single axis tables are also available as standard specification. This product is most suitable for use as a high accuracy positioning mechanism with a large applied load and a relatively long stroke.

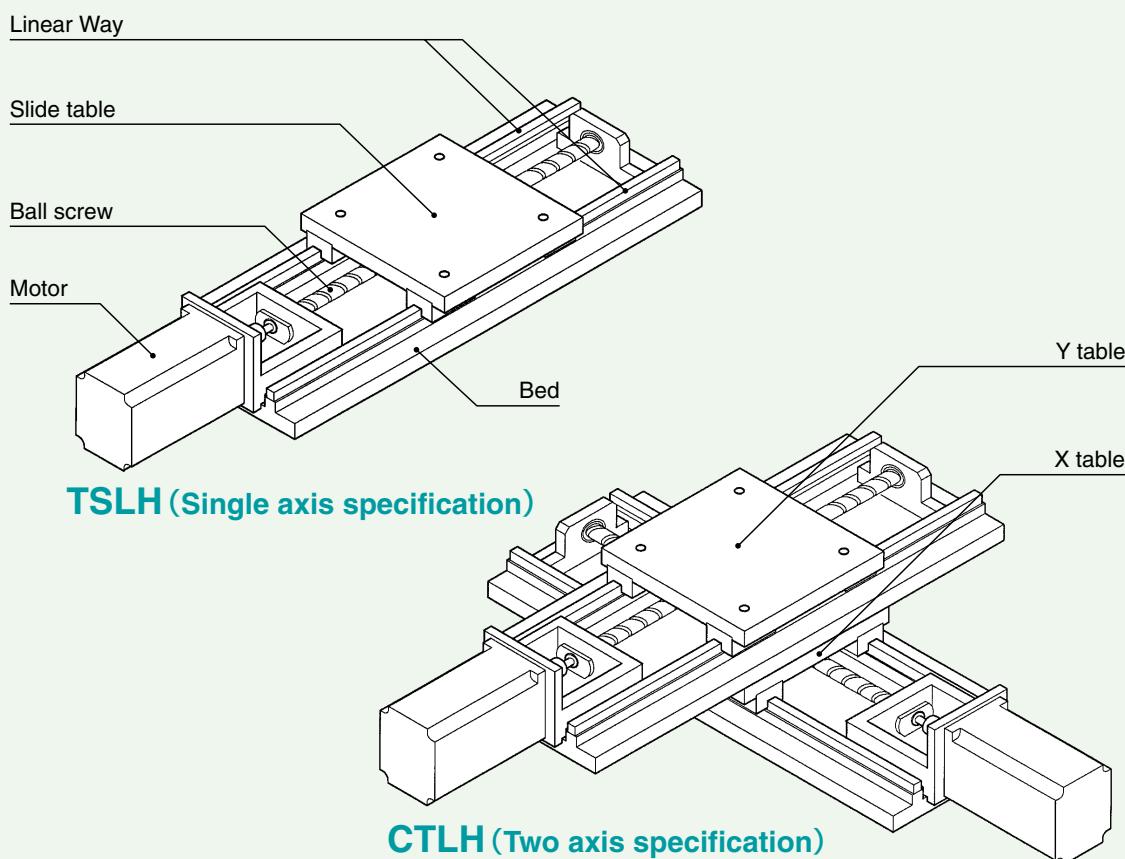

Structure of Precision Positioning Table LH

Features of TSLH and CTLH

1

High running accuracy and positioning accuracy

The slide table and bed made of cast iron are finished by grinding and high accuracy component parts are carefully selected for assembly, so both high running accuracy and high positioning accuracy can be obtained.

2

High rigidity and large loading weight

The design of the table featuring optimal arrangement of two sets of Linear Ways mounted on a high rigidity bed achieves high strength under moment and complex load as well as high load capacity.

3

Series includes the super large size with a table width of 420 mm

Four sizes with table widths ranging from 120 mm up to super large size 420 mm are available. Two axis specification tables which combine these single tables are also available as standard specification. Stroke length can also be selected from many lengths provided.



TSLH
(Single axis specification)



TSLH
(Table with bellows)




CTLH
(Two axis specification)

Identification Number

Example of identification number (Single axis specification)

TSLH 220 H - 200 A / A2 B 10 J G R

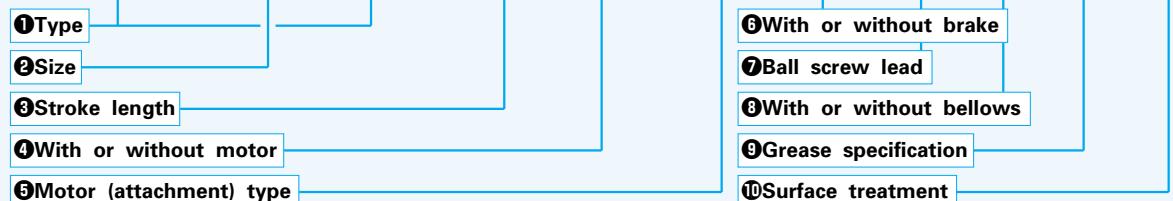

①Type	TSLH···H: Precision Positioning Table LH (Single axis specification)
--------------	--

②Size	120: Table width 120mm, 220: Table width 220mm 320: Table width 320mm, 420: Table width 420mm
--------------	--

③Stroke length	Stroke lengths in Table 1 are available.
-----------------------	--

The stroke length of the table with bellows is a little shorter than that without bellows. Refer to the dimension table.

Table 1 Stroke length

Model number	Stroke length mm
TSLH120H	100, 150, 200, 250, 300
TSLH220H	150, 200, 250, 300, 400 (500, 600)
TSLH320H	300, 400, 500 (600, 800, 1000)
TSLH420H	500, 600, 800 (1000)

Remark: When the stroke length indicated in the parenthesis is required, consult **IKO**.

④With or without motor	No symbol: without motor, A: with motor In case the motor is provided by the customer, select "without motor" (No symbol).
-------------------------------	---

⑤Motor (attachment) type	Select a motor code in Table 2. In case "without motor" (No symbol) is selected in item4, the motor attachment and coupling for the motor type selected in this item are attached.
---------------------------------	---

Table 2 Motor type and code

Motor type	TSLH120H	TSLH220H	TSLH320H	TSLH420H
AC servo motor	A1、M1	A2、M2	A2、M2	AA4、MA4
Stepping motor	K6	K7	K7	—

Remark: Refer to motor specification on page 9.

⑥With or without brake	No symbol: without brake, B: with brake To specify "motor with brake", select "with brake" (select B).
-------------------------------	---

⑦Ball screw lead	5: Lead 5mm, 10: Lead 10mm (20: Lead 20mm) Remark: If 20 mm lead is required, consult IKO .
-------------------------	---


⑧With or without bellows	No symbol: without bellows, J: with bellows The stroke length of the table with bellows is a little shorter than that without bellows. Refer to the dimension table.
---------------------------------	---

⑨Grease specification	No symbol: Shell Alvania EP2 grease, G: IKO Clean Environment Grease CG2
------------------------------	---

⑩Surface treatment	No symbol: Black chrome surface treatment, R: Black chrome surface treatment 1, L: Black chrome surface treatment 2 Black chrome surface treatment: Treatment is made on all surfaces of main parts except Linear Ways, ball screw and ball bearings. Black chrome surface treatment 1: In addition to the above, treatment is made on the Linear Way surface. Black chrome surface treatment 2: In addition to the above treatment 1, treatment is made on the ball screw surface. Black chrome surface treatment is a surface treatment by which a black permeable film is formed on the surface to increase corrosion resistance. The films on the reference surfaces of parts are removed after the treatment.
---------------------------	--

Example of identification number (Two axis specification)

CTLH 220 H - 30 20 A / A2 B 5 J G R C

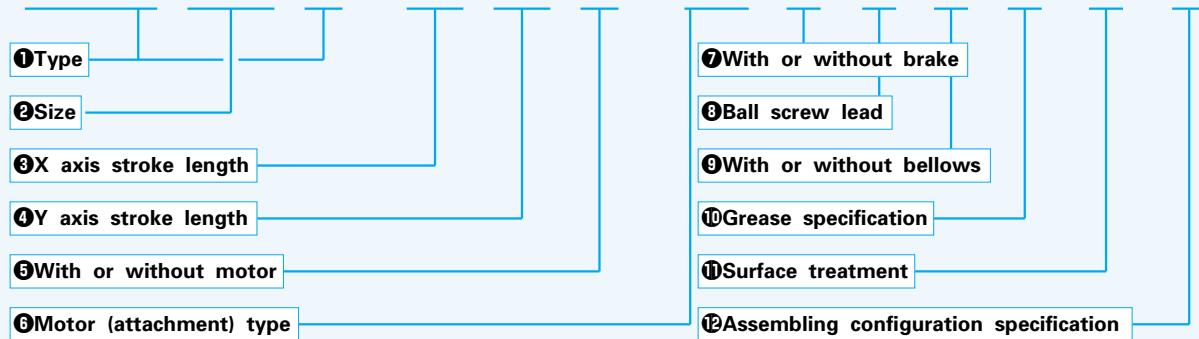

①Type CTLH…H: Precision Positioning Table LH (Two axis specification)

②Size 120: Table width 120mm, 220: Table width 220mm
320: Table width 320mm

Single axis tables of different sizes can be assembled.

③④Stroke length Refer to the dimension table.

The stroke length of each axis is indicated in cm. The length that can be selected is different for X and Y axes.
The stroke length of the table with bellows is a little shorter than that without bellows. Refer to the dimension table.

⑤With or without motor No symbol: without motor, A: with motor

In case the motor is provided by the customer, select "without motor" (No symbol).

⑥Motor (attachment) type Select a motor code in Table 3.

In case "without motor" (No symbol) is selected in item 5, the motor attachment and coupling for the motor type selected in this item are attached.

Table 3 Motor type and code

Motor type	CTLH120H	CTLH220H	CTLH320H
AC servo motor	A1, M1	A2, M2	A2, M2
Stepping motor	K6	K7	K7

Remark: Refer to motor specification on page 9.

⑦With or without brake No symbol: without brake, B: with brake

To specify "motor with brake", select "with brake" (select B). But the motor with brake is provided on Y axis only.

⑧Ball screw lead 5: Lead 5mm, 10: Lead 10mm (20: Lead 20mm)

Remark: If 20 mm lead is required, please consult **IKO**.

⑨With or without bellows No symbol: without bellows, J: with bellows

The stroke length of the table with bellows is a little shorter than that without bellows. Refer to the dimension table.

⑩Grease specification No symbol: Shell Alvania EP2 grease, G: **IKO** Clean Environment Grease CG2

⑪Surface treatment No symbol: Black chrome surface treatment, R: Black chrome surface treatment 1, L: Black chrome surface treatment 2

Black chrome surface treatment: Treatment is made on all surfaces of main parts except Linear Ways, ball screw and ball bearings.
Black chrome surface treatment 1: In addition to the above, treatment is made on the Linear Way surface.

Black chrome surface treatment 2: In addition to the above treatment 1, treatment is made on the ball screw surface.

Black chrome surface treatment is a surface treatment by which a black permeable film is formed on the surface to increase corrosion resistance.
The films on the reference surfaces of parts are removed after the treatment.

⑫Assembling configuration specification No symbol: standard configuration, C: reverse configuration

Standard configuration: X and Y axes are assembled with the Y axis motor at right in sight of X axis motor in front.

Reverse configuration: X and Y axes are assembled with the Y axis motor at left in sight of X axis motor in front.

Accuracy and Maximum Speed

The accuracy and the maximum speed of Precision Positioning Table LH are shown in Table 4 and Table 5. The values of the maximum speed shown in Table 5 are applicable when the standard motor is used. The actual maximum speed must be determined by examining the operation pattern for the motor used, load conditions, etc.

Table 4 Accuracy

unit: mm

Size		Stroke length	Positioning accuracy	Repeatability	Parallelism in operation A	Straightness	Squareness of XY travel	Back lash	
		X axis	Y axis						
Single axis specification	TSLH120H	100	0.010	± 0.002	0.010	0.005	—	0.001	
		150	0.010		0.015				
		200	0.015		0.020				
		250							
		300	0.020						
	TSLH220H	150	0.010	± 0.002	0.010	0.005	—	0.001	
		200	0.015		0.015				
		250							
		300							
		400	0.020		0.020	0.010			
Two axis specification	TSLH320H	300	0.015	± 0.002	0.015	0.005	—	0.001	
		400	0.020		0.015				
		500							
	TSLH420H	500	0.025	± 0.002	0.025	0.015	—	0.001	
		600	0.030		0.030				
		800	0.035		0.035				
	CTLH120H	100	0.015	± 0.002	0.015	0.005	0.005	0.001	
		200	0.020		0.020	0.010	0.010		
		200	0.020		0.025				
		300	0.030		0.030				
		300	0.030						
Two axis specification	CTLH220H	200	0.020	± 0.002	0.025	0.010	0.010	0.001	
		300	0.020		0.035	0.020	0.015		
		300	0.030						
		400	0.030						
		400	0.040						
	CTLH320H	300	0.020	± 0.002	0.020	0.005	0.010	0.001	
		400	0.025		0.025	0.010	0.015		
		400	0.030		0.035				
		500	0.030		0.035				
		500	0.040		0.040				

Table 5 Maximum speed


Motor type	Size		Motor speed rpm	Maximum speed mm/s	
	Single axis specification	Two axis specification		Lead 5 mm	Lead 10mm
AC servo motor	TSLH120H	CTLH120H	3000	250	500
	TSLH220H	CTLH220H			
Stepping motor	TSLH320H	CTLH320H	2690	224	448
	TSLH420H	CTLH420H			
	TSLH120H	CTLH120H			
Stepping motor	TSLH220H	CTLH220H	1800	150	300
	TSLH320H	CTLH320H			

Maximum Loading Mass

Table 6 shows the maximum loading mass of Precision Positioning Table LH.

The maximum loading mass is a general value of the maximum mass that can be loaded on the table when the table is used in a horizontal position. The value of the maximum mass varies depending on the positions (height distance H and length distance L) where the mass is loaded.

Table 6 Maximum loading mass

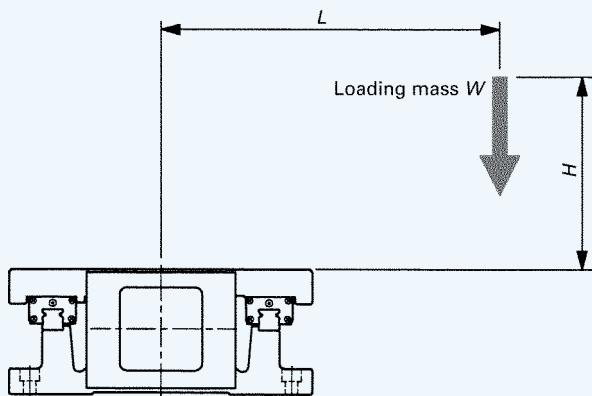

unit: kg

Size	Height distance H mm	Length distance L mm								
		0	100	200	300	400	500	600	800	1000
TSLH120H	0	110	56	33	23	18	15	12	9.4	7.6
	200	110	52	32	23	18	15	12	9.4	7.6
	400	81	45	30	22	17	14	12	9.4	7.6
	600	59	39	28	21	17	14	12	9.3	7.5
TSLH220H	0	240	140	88	64	50	42	35	27	22
	200	240	130	85	63	50	41	35	27	22
	400	200	120	81	61	49	41	35	27	22
	600	160	100	76	59	48	40	34	27	22
TSLH320H	0	410	370	250	190	150	130	110	85	70
	200	410	350	240	190	150	130	110	85	69
	400	410	320	230	180	150	120	110	84	69
	600	410	290	220	170	140	120	110	83	69
TSLH420H	0	410	410	340	270	220	180	160	120	100
	200	410	410	340	260	220	180	160	120	100
	400	410	410	330	260	210	180	160	120	100
	600	410	410	310	250	210	180	150	120	100

Remark 1: The maximum loading mass is obtained by calculating the mass under which the rating life of the ball screw or linear way becomes 18000 hours when the table is continuously operated in an operation pattern consisting of 0.2s duration each at the maximum speed (for each size), at acceleration, and at deceleration.

2: For the two axis specification table, examine the loading mass for each axis.

1N=0.102kgf=0.2248lbs.

1mm=0.03937inch

Motor Specifications

An AC servo motor and a stepping motor can be selected for Precision Positioning Table LH. Also, for both motor types, "with brake" can be specified. So selection can be made from wide variations meeting the requirements for each application.

Table 7 shows the types of standard motors. Table 8 shows the types of connectors used for each motor.

Table 7 Type of standard motor

Size	Motor type	With or without brake	Motor code	Model number	Remark
TSLH120H CTLH120H(')	AC servo motor	Without brake	A1	SGM-01B512	Yaskawa Electric Corporation
			M1	MSM011A1A	Matsushita Electric Industrial Co., Ltd.
		With brake	A1B	SGM-01B512B	Yaskawa Electric Corporation
			M1B	MSM011A1B	Matsushita Electric Industrial Co., Ltd.
	Stepping motor	Without brake	K6	PK569-A	Oriental Motor Co., Ltd.
		With brake	K6B	PK569-A-A25	
TSLH220H TSLH320H CTLH220H(') CTLH320H(')	AC servo motor	Without brake	A2	SGM-02B512	Yaskawa Electric Corporation
			M2	MSM021A1A	Matsushita Electric Industrial Co., Ltd.
		With brake	A2B	SGM-02B512B	Yaskawa Electric Corporation
			M2B	MSM021A1B	Matsushita Electric Industrial Co., Ltd.
	Stepping motor	Without brake	K7	PK596-A	Oriental Motor Co., Ltd.
		With brake	K7B	PK596-A-A25	
TSLH420H	AC servo motor	Without brake	AA4	SGM-04A512	Yaskawa Electric Corporation
			MA4	MSM042A1A	Matsushita Electric Industrial Co., Ltd.
		With brake	AA4B	SGM-04A512B	Yaskawa Electric Corporation
			MA4B	MSM042A1B	Matsushita Electric Industrial Co., Ltd.

Note('): The motor with brake is attached to Y axis only for the two axis table with brake.

Table 8 Type of applicable connector


Motor type	Connector type	Motor code		Type of motor-side connector		Type of opposite-side connector	
				Plug housing	Contactor	Cap housing	Contactor
AC servo motor	Motor connector	Without brake	A… M…	172167-1	170360-1	172159-1	170362-1
			A…B	172168-1		172160-1	
		With brake	M…B	172167-1 172165-1		170159-1 172157-1	
	Encoder connector	A…		172169-1	170359-1	172161-1	170361-1
		M…		172171-1		172163-1	
Stepping motor	Motor connector	K…		172170-1	170364-1	172162-1	170366-1

Remark: Manufactured by AMP

Sensor Specifications

Table 9 shows a timing chart of the sensors used in Precision Positioning Table LH and Table 10 shows connector specifications.

Table 9 Sensor timing chart

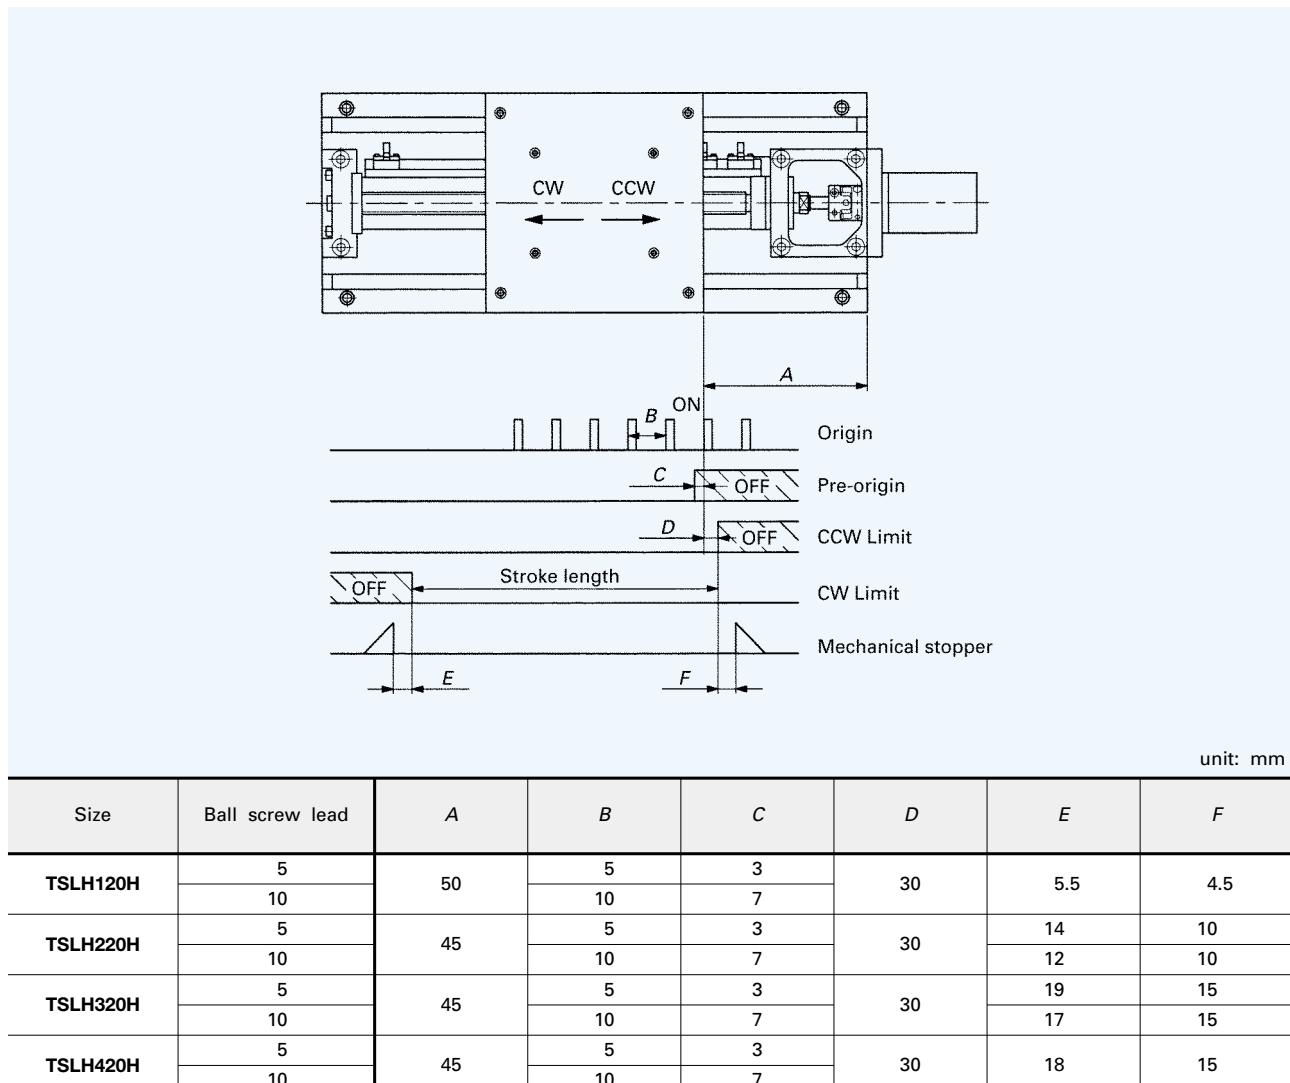

Remark 1: For a two axis table, the sensor specification for the single axis table is applicable for each axis.

2: For a table with bellows, the values shown in the above table are not applicable.

3: For a table with AC servo motor, the origin sensor is not attached. Use C phase or Z phase signal of motor encoder for origin signal.

Table 10 Specification of connector

Pin No.	Signal	Sensor specification (Optical sensor)	Sensor(table) side connector	Contact side connector(')
1	Origin	Open collector output Less than DC 30V 100mA max	Cap-housing 172160-1	Plug-housing 172168-1
2	Pre-origin			
3	CW Limit		Contactor 170365-1	Contactor 170363-1
4	CCW Limit			
5	Power supply voltage (DC5~24V)			
6	GND			

Note('): Manufactured by AMP


Remark: For a table with AC servo motor, wiring for origin sensor is not provided.

Electric Devices


■System configuration

Electric devices for Precision Positioning Table LH are specially designed to bring out full performance of the table. A well balanced system can be obtained by using these devices with the table. Tables 11 to 15 show system configurations of the table with the electric devices when a standard motor is used.

●System configuration of a table with AC servo motor(configuration with a control unit)

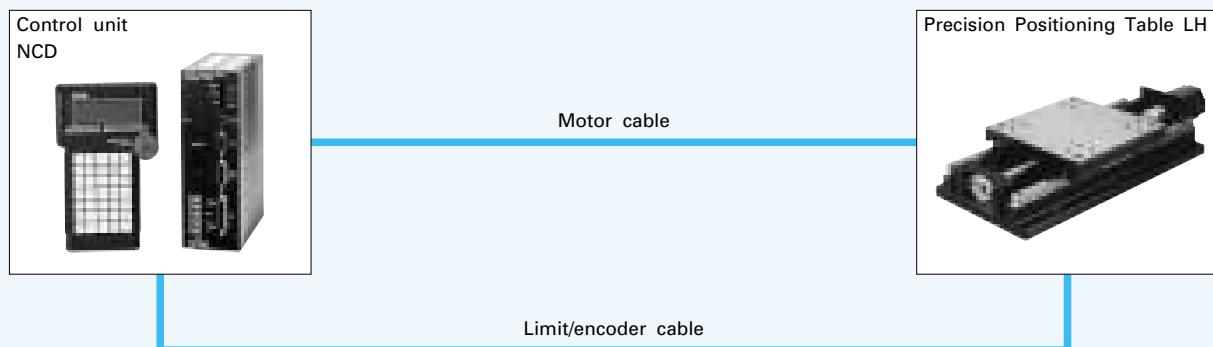

●System configuration of a table with AC servo motor(configuration with a driver and a programmable controller)

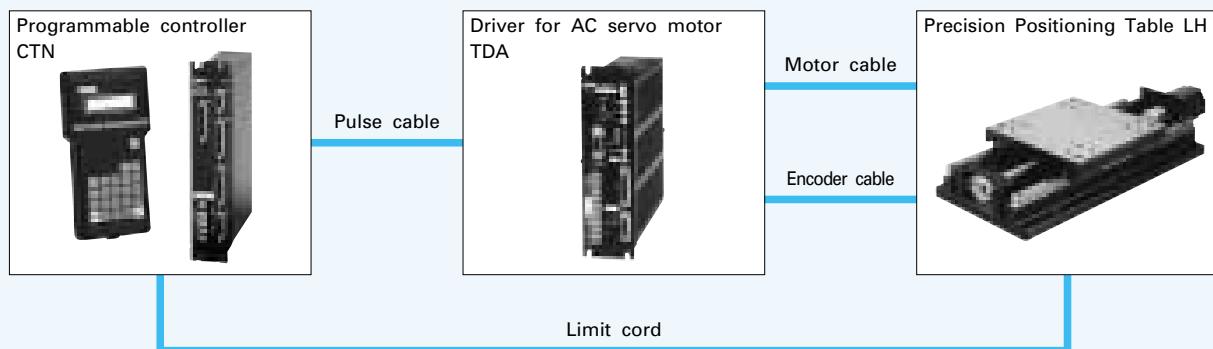

●System configuration of a table with stepping motor

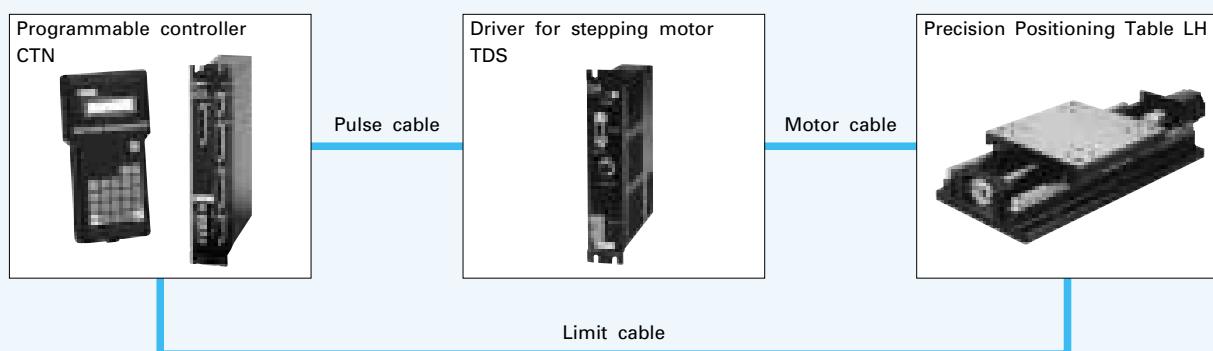


Fig.1 System configuration

Table 11 System configuration of TSLH(single axis specification) with AC servo motor(configuration with a control unit)

Size	With or without brake	Motor code	Control unit			
			Main body	Teaching box	Motor cable	Limit-encoder cable
TSLH120H	Without brake	A1、A2	NCD160G-A2006	TAE1050-TB	TAE2065-AM03 (TAE2072-AM03)	TAE2066-AEL03 (TAE2073-AEL03)
		M1、M2				TAE2067-AEL03 (TAE2074-AEL03)
	With brake	A1B、A2B	NCD160G-A2006 TAE1049-BK ⁽¹⁾	TAE1050-TB	TAE2070-AMB03 (TAE2077-AMB03)	TAE2066-AEL03 (TAE2073-AEL03)
		M1B、M2B			TAE2071-AMB03 (TAE2078-AMB03)	TAE2067-AEL03 (TAE2074-AEL03)

Note⁽¹⁾: Brake regenerative unit type. Connect it to the main body of driver.

Remark 1: The cables in the parentheses have high bending resistance.

2: The standard length of the cable is 3m.

3: For TSLH420H system configuration, please consult **IKO**.

Table 12 System configuration of TSLH (single axis specification) with AC servo motor(configuration with a driver and a programmable controller)

Size	With or without brake	Motor code	Type of applicable electric devices							
			Driver			Programmable controller				
			Main body	Motor cable	Encoder cable	Main body	Teaching box	Pulse cable	Limit cable	
TSLH120H	Without brake	A1	TDA 1-1004	TAE2052-AM03 (TAE2036-AM03)	TAE2054-AE03 (TAE2038-AE03)	CTN120G	TAE1005-TB	TAE1022-LD03		
						CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03	
						CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03	
						CTN150S	TAE1048-TB	TAE1022-LD03		
	With brake	A1B	TDA 1-1004BK	TAE2053-AMB03 (TAE2037-AMB03)		CTN120G	TAE1005-TB	TAE1022-LD03		
						CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03	
						CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03	
						CTN150S	TAE1048-TB	TAE1022-LD03		
TSLH220H	Without brake	A2	TDA 1-2004	TAE2052-AM03 (TAE2036-AM03)	TAE2054-AE03 (TAE2038-AE03)	CTN120G	TAE1005-TB	TAE1022-LD03		
						CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03	
						CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03	
						CTN150S	TAE1048-TB	TAE1022-LD03		
	With brake	A2B	TDA 1-2004BK	TAE2053-AMB03 (TAE2037-AMB03)		CTN120G	TAE1005-TB	TAE1022-LD03		
						CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03	
						CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03	
						CTN150S	TAE1048-TB	TAE1022-LD03		

Remark 1: The cables in the parentheses have high bending resistance.

2: The standard lengths of the motor cable, encoder cable, and limit cable are 3m. The length of the pulse cable is 1.5m.

3: For TSLH420H system configuration, please consult **IKO**.

Table 13 System configuration of TSLH (single axis specification) with stepping motor

Size	With or without brake	Motor code	Type of applicable electric devices					
			Driver		Programmable controller			
			Main body	Motor cable	Main body	Teaching box	Pulse cable	Limit cable
TSLH120H	Without brake	K6	TDS1-5145	TAE2045-SML03 (TAE2059-SNL03)	CTN120G	TAE1005-TB	TAE1022-LD03	
					CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03
					CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03
					CTN150S	TAE1048-TB	TAE1022-LD03	
	With brake	K6B	TDS1-5145BK	TAE2061-SMBL03 (TAE2062-SNBL03)	CTN120G	TAE1005-TB	TAE1022-LD03	
					CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03
					CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03
					CTN150S	TAE1048-TB	TAE1022-LD03	
TSLH220H TSLH320H	Without brake	K7	TDS1-5145	TAE2045-SML03 (TAE2059-SNL03)	CTN120G	TAE1005-TB	TAE1022-LD03	
					CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03
					CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03
					CTN150S	TAE1048-TB	TAE1022-LD03	
	With brake	K7B	TDS1-5145BK	TAE2061-SMBL03 (TAE2062-SNBL03)	CTN120G	TAE1005-TB	TAE1022-LD03	
					CTN130G	TAE1016-TB	TAE1012-PC	TAE1042-LC03
					CTN140G	TAE1025-TB	TAE1030-PC	TAE1027-LCA03
					CTN150S	TAE1048-TB	TAE1022-LD03	

Remark 1: The cables in the parentheses have high bending resistance.

2: The standard lengths of the motor cable and limit cable are 3m. The length of the pulse cable is 1.5m.

Table 14 System configuration of CTLH (two axis specification) with AC servo motor(configuration with a driver and a programmable controller)

Size	With or without brake	Motor code	Type of applicable electric devices							
			Driver			Programmable controller				
			Main body	Motor cable	Encoder cable	Main body	Teaching box	Pulse cable	Limit cable	
CTLH120H	Without brake	A1	TDA 1-1004 2 sets	TAE2052-AM03 (TAE2036-AM03) 2 pieces	TAE2054-AE03 (TAE2038-AE03) 2 pieces	CTN220G	TAE1005-TB	TAE1038-LYY03		
	With brake		TDA 1-1004 + TDA 1-1004BK	TAE2052-AM03 (TAE2036-AM03) + TAE2053-AMB03 (TAE2037-AMB03)		CTN230G	TAE1016-TB	TAE1013-PCY	TAE1043-LCY03	
	Without brake	A2	TDA 1-2004 2 sets	TAE2052-AM03 (TAE2036-AM03) 2 pieces		CTN240G	TAE1025-TB	TAE1031-PCY	TAE1029-LCAY03	
	With brake		TDA 1-2004 + TDA 1-2004BK	TAE2052-AM03 (TAE2036-AM03) + TAE2053-AMB03 (TAE2037-AMB03)		CTN220G	TAE1005-TB	TAE1038-LYY03		
CTLH220H CTLH320H	Without brake	A2	TDA 1-2004 2 sets	TAE2052-AM03 (TAE2036-AM03) 2 pieces	TAE2054-AE03 (TAE2038-AE03) 2 pieces	CTN230G	TAE1016-TB	TAE1013-PCY	TAE1043-LCY03	
	With brake		TDA 1-2004 + TDA 1-2004BK	TAE2052-AM03 (TAE2036-AM03) + TAE2053-AMB03 (TAE2037-AMB03)		CTN240G	TAE1025-TB	TAE1031-PCY	TAE1029-LCAY03	
	Without brake	A2B	TDA 1-2004 2 sets	TAE2052-AM03 (TAE2036-AM03) 2 pieces		CTN220G	TAE1005-TB	TAE1038-LYY03		
	With brake		TDA 1-2004 + TDA 1-2004BK	TAE2052-AM03 (TAE2036-AM03) + TAE2053-AMB03 (TAE2037-AMB03)		CTN230G	TAE1016-TB	TAE1013-PCY	TAE1043-LCY03	
	Without brake	A2B	TDA 1-2004 2 sets	TAE2052-AM03 (TAE2036-AM03) 2 pieces		CTN240G	TAE1025-TB	TAE1031-PCY	TAE1029-LCAY03	
	With brake		TDA 1-2004 + TDA 1-2004BK	TAE2052-AM03 (TAE2036-AM03) + TAE2053-AMB03 (TAE2037-AMB03)						

Remark 1: The cables in the parentheses have high bending resistance.

2: The standard lengths of the motor cable, encoder cable, and limit cable are 3m. The length of the pulse cable is 1.5m.

3: For the table with brake, the brake is attached to Y axis motor only.

Table 15 System configuration of CTLH (two axis specification) with stepping motor

Size	With or without brake	Motor code	Type of applicable electric devices							
			Driver		Programmable controller					
			Main body	Motor cable	Main body	Teaching box	Pulse cable	Limit cable		
CTLH120H	Without brake	K6	TDS2-5145	TAE2045-SML03 (TAE2059-SNL03) 2 pieces	CTN220G	TAE1005-TB	TAE1034-LY03			
	With brake				CTN230G	TAE1016-TB	TAE1012-PC	TAE1043-LCY03		
	Without brake	K6B	TDS2-5145BK		CTN240G	TAE1025-TB	TAE1030-PC	TAE1029-LCAY03		
	With brake				CTN220G	TAE1005-TB	TAE1034-LY03			
	Without brake	K7	TDS2-5145	TAE2045-SML03 (TAE2059-SNL03) 2 pieces	CTN230G	TAE1016-TB	TAE1012-PC	TAE1043-LCY03		
	With brake				CTN240G	TAE1025-TB	TAE1030-PC	TAE1029-LCAY03		
CTLH220H CTLH320H	Without brake	K7	TDS2-5145		CTN220G	TAE1005-TB	TAE1034-LY03			
	With brake				CTN230G	TAE1016-TB	TAE1012-PC	TAE1043-LCY03		
	Without brake	K7B	TDS2-5145BK	TAE2045-SML03 (TAE2059-SNL03) + TAE2061-SMBL03 (TAE2062-SNBL03)	CTN240G	TAE1025-TB	TAE1030-PC	TAE1029-LCAY03		
	With brake				CTN220G	TAE1005-TB	TAE1034-LY03			
	Without brake	K7B	TDS2-5145BK		CTN230G	TAE1016-TB	TAE1012-PC	TAE1043-LCY03		
	With brake				CTN240G	TAE1025-TB	TAE1030-PC	TAE1029-LCAY03		

Remark 1: The cables in the parentheses have high bending resistance.

2: The standard lengths of the motor cable, encoder cable, and limit cable are 3m. The length of the pulse cable is 1.5m.

3: For the table with brake, the brake is attached to Y axis motor only.


■Driver

Table 16 Main specification of driver for AC servo motor

Item	Type	TDA1-1004	TDA1-2004
Number of control axes		1	
Rated output of applicable motor	30W、50W、100W		100W、200W
Feedback		Incremental encoder	
Command pulse input system	CW/CCW pulse or pulse/direction command		
Command pulse input form	Line driver or open collector (+5V level)		
Supply voltage	AC100V±10% 50/60Hz		
Current consumption	10A or less		12A or less
Ambient temperature (during operation)	0~50°C		
Ambient humidity (during operation)	35~85%RH (non-condensing)		
Mass (reference value)	2.0kg		2.2kg

Table 17 Main specification of driver for stepping motor

Item	Type	TDS1-5145	TDS2-5145
Number of control axes		1	2
Applicable motor	5-phase stepping motor of 0.75 to 1.4A/phase		
Drive method	Bipolar constant-current drive		
Excitation method	4 to 5-phase excitation or 4-phase excitation		
Command pulse input system	CW/CCW pulse		
Command pulse input form	Line driver or open collector (+5V level)		
Supply voltage	AC100V±10% 50/60Hz		
Current consumption	5A以下		10A以下
Ambient temperature (during operation)	0~50°C		
Ambient humidity (during operation)	35~85%RH (non-condensing)		
Mass (reference value)	1.3kg		2.0kg

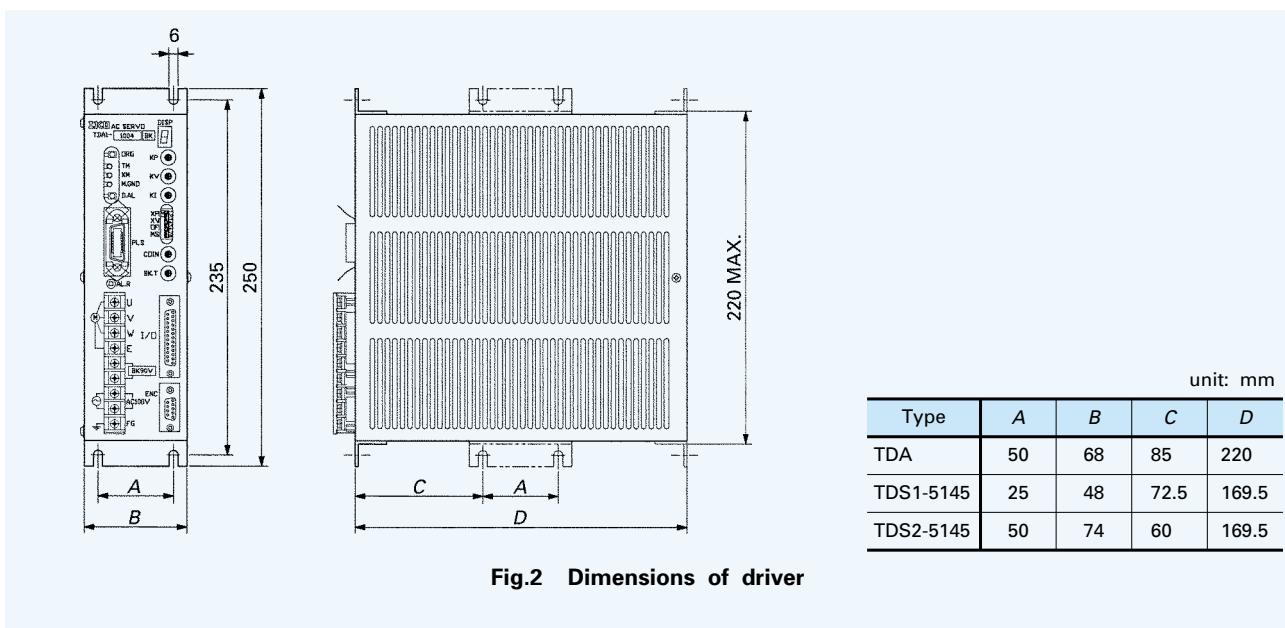

Remark: The drawing shows TDA1-1004.

■Control unit

Table 18 Main specifications of control unit

Item	Type	NCD160G-A2006
Number of control axes		1
Applicable motor		AC servo motor 100W、200W
Feedback		Incremental encoder
Maximum command value		$\pm 2147483647\mu\text{m}$
Motor speed		Rated motor speed 3,000rpm, maximum motor speed 4,500rpm
Input method		MDI, teaching and PC input via RS-232C
Command input system		Absolute command or incremental command
Program capacity		12k bytes (1,200 steps or more)
Number of positioning points		256 points
Functions		Jump, call, repetition, speed setting, acceleration/deceleration setting, timer control, I/O control, branching by input conditions, various editing functions (such as creation, deletion, erasing, and insertion)
Number of I/O points		LS input: 3 points, I/O input: 23 points, I/O output: 15 points
Power supply for input and output		DC24V 1A
Protective functions		Over-current, over-voltage, over-load, over-speed, voltage drop, encoder error, deviation error, over-heat, CPU error, etc.
Other major functions		RS-232C (reading, writing, direct execution, etc.), software limit, torque limitation, torque monitoring, speed change during movement, LS logic change, various check functions, brake regenerative unit (optional) ⁽¹⁾ , etc.
Supply voltage		AC85~132V 50/60Hz
Current consumption		12A or less
Ambient temperature (during operation)		0~50°C
Ambient humidity (during operation)		35~85%RH (non-condensing)
Weight (reference value)		Main body 1.6kg, teaching box 0.5kg

Note⁽¹⁾ : This regenerative unit contains a brake power supply for motor with brake. (TAE1049-BK)

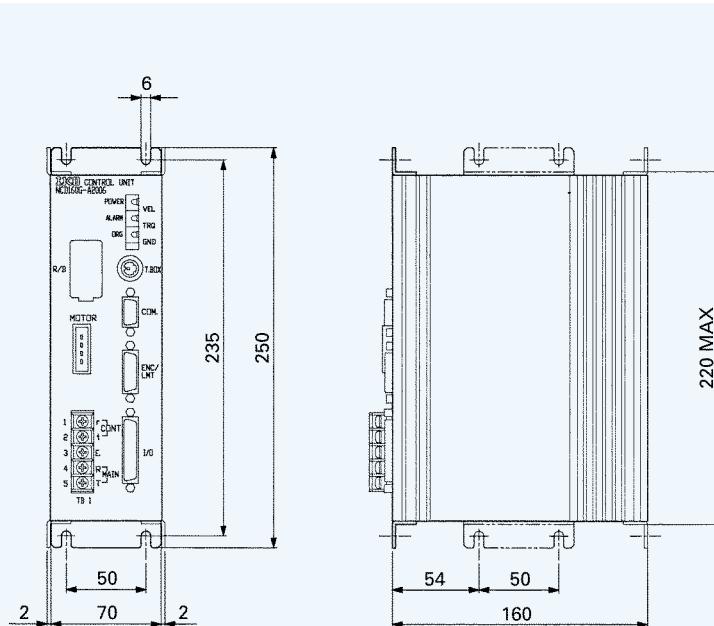


Fig.3 Dimensions of control unit


■Programmable controller

Programmable controller is available in four types: three program input types and one point memory type. Table 19 shows types and characteristics of programmable controllers. A model best suited for the requirement of application can be selected.

Table 19 Main specifications of programmable controller

Model	Program input type			Point memory type CTN150S
	CTN120G CTN220G	CTN130G CTN230G CTN430G	CTN140G CTN240G	
	Type	Standard type	High-function type	
Appearance	 	 	 	 
Number of control axes	1 or 2 axes	1, 2, or 4 axes	1 or 2 axes	1 axis
Supply voltage	AC90~110V	AC85~132V	DC24V±10%	DC24V±10%
Maximum output frequency	200kpps	1.5Mpps	200kpps	2.5Mpps
Pulse output system	CW/CCW pulse or direction command/forward and reverse pulses			
	Current discharge type	Line driver	Line driver	Line driver
Maximum command value	±999999 pulses	±99999999 pulses	±999999 pulses	±2147483648 pulses
Acceleration/deceleration method	Straight line	Straight line, S shaped line	Straight line	Straight line, S shaped line, cycloid
Command input system	Absolute command or incremental command			
Program capacity	1000 steps	2000 steps	1000 steps	64-point memory (not programmable)
General input and output (I/O)	Input	8 points (CTN120G) 20 points (CTN220G)	20 points	8 points (CTN140G) 20 points (CTN240G)
	Output	7 points (CTN120G) 12 points (CTN220G)	12 points	7 points (CTN140G) 12 points (CTN240G)
Linear and arc interpolation	○ (CTN220G)	○ (CTN230G, CTN430G)	×	×
	Point pass	○	×	×
General input and output add-ons	×	○	×	×
Memory card	○	○	×	×
RS-232C operation	○	○	○	○
Position correction of linear scale	×	○	×	×
Remarks	The program input type is so designed that programs entered by a teaching box or PC are executed in order of steps. Programming is possible with an optional teaching box or PC, or by simple teaching.			The point memory type does not come with a program function. Stored points are switched over and executed with an external device such as a sequencer or PC.
	Standard type with 100V AC power supply input. The interpolation function of CTN220G comes with a point pass function as standard specification.	High-function type with a 100V AC power supply input. High-speed output at 1.5Mpps maximum. A series of multi-axis controllers up to four-axis control.	A type to be incorporated into compact electric devices with a 24V DC power supply input.	

Remark : ○ indicates that the unit has the function. × indicates that the unit does not have the function.

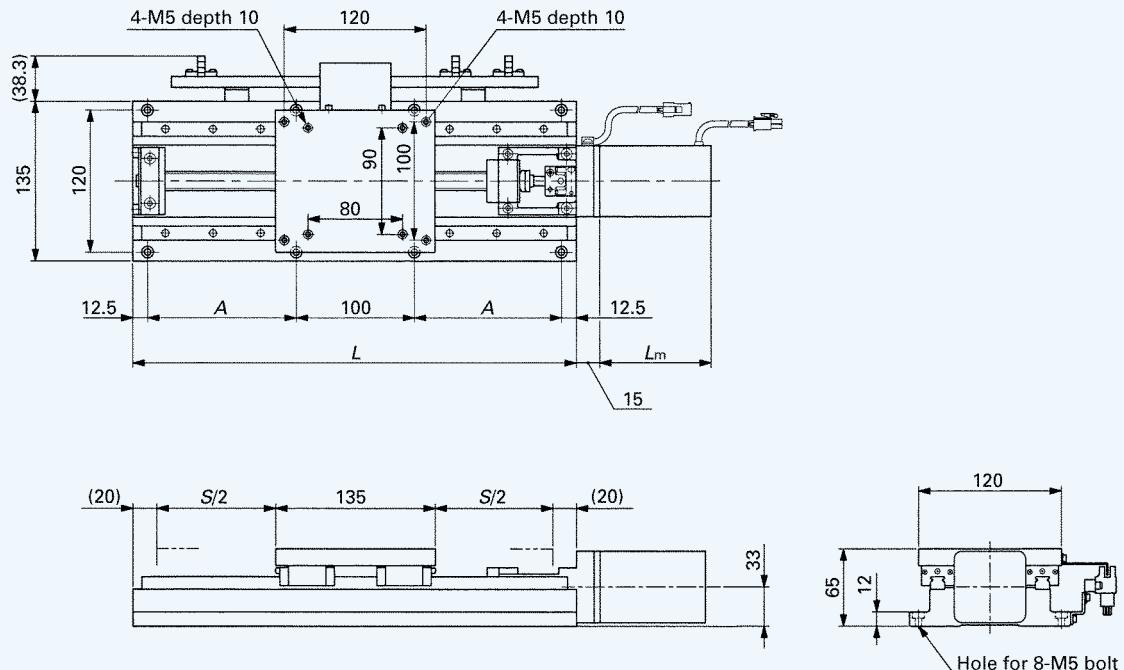

unit: mm

Model number	Stroke length <i>S</i>	Total length <i>L</i>	Mounting hole of bed <i>A</i>	Mass ⁽¹⁾ (Reference) kg
TSLH120H-100	100	275	75	9.8
TSLH120H-150	150	325	100	10.8
TSLH120H-200	200	375	125	11.9
TSLH120H-250	250	425	150	12.9
TSLH120H-300	300	475	175	14.0


Note⁽¹⁾ : The motor mass is not included.Dimensions of motor *L_m*

unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A1	M1	K6
Without brake	94.5	103	87
With brake	135	135	129

IKO Precision Positioning Table LH

TSLH220H

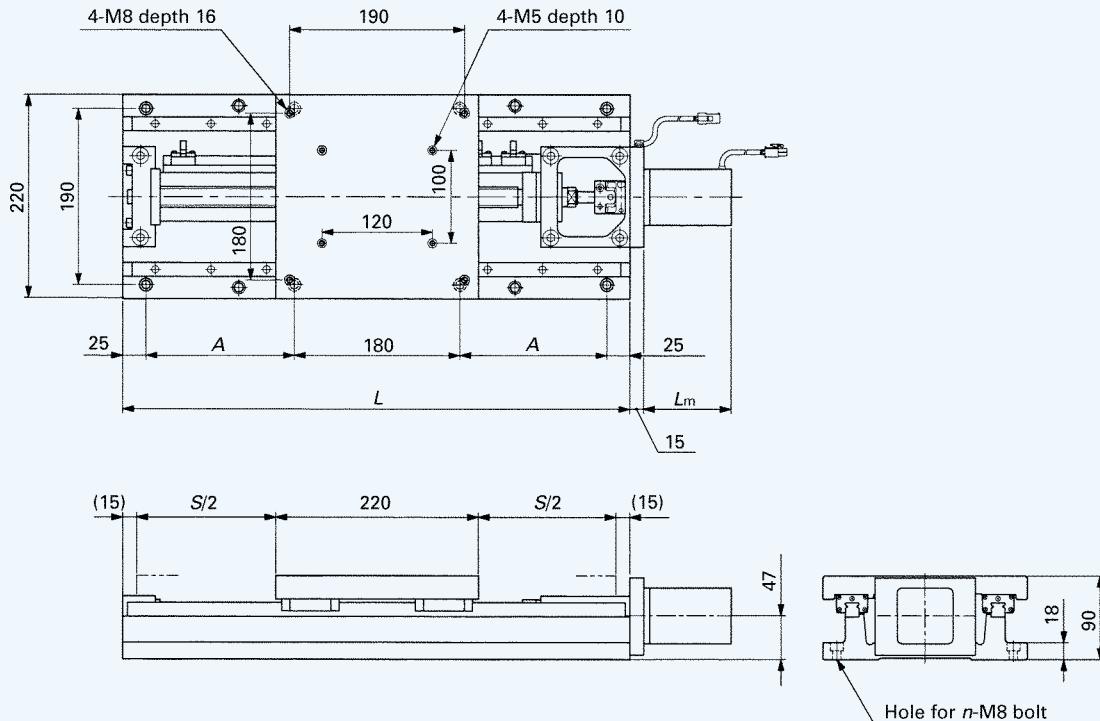

unit: mm

Model number	Stroke length <i>S</i>	Total length <i>L</i>	Mounting hole of bed		Mass ⁽ⁱ⁾ (Reference) kg
			<i>A</i> (quantity × pitch)	<i>n</i>	
TSLH220H-150	150	400	85	8	31.1
TSLH220H-200	200	450	110	8	33.3
TSLH220H-250	250	500	135	8	35.5
TSLH220H-300	300	550	160	8	37.6
TSLH220H-400	400	650	210 (2×105)	12	42.0
(TSLH220H-500)	500	750	260 (2×130)	12	46.4
(TSLH220H-600)	600	850	310 (2×155)	12	50.8

Note⁽ⁱ⁾ : The motor mass is not included.

Remark: If the model number in the parenthesis is required, please consult IKO.


Dimensions of motor *L_m*

unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A2	M2	K7
Without brake	96.5	95	66
With brake	136	128	119

IKO Precision Positioning Table LH

TSLH320H

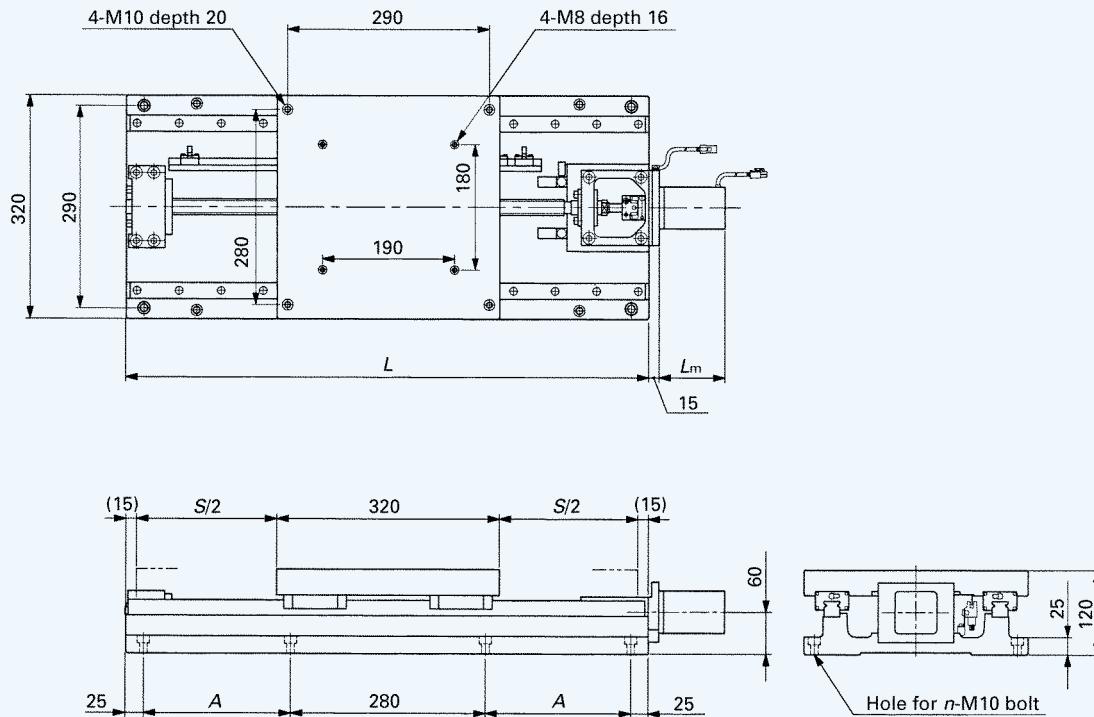

unit: mm

Model number	Stroke length <i>S</i>	Total length <i>L</i>	Mounting hole of bed A (quantity × pitch)	<i>n</i>	Mass(') (Reference) kg
TSLH320H- 300	300	650	160	8	99.5
TSLH320H- 400	400	750	210	8	109
TSLH320H- 500	500	850	260	8	118
(TSLH320H- 600)	600	950	310	8	127
(TSLH320H- 800)	800	1150	410 (2×205)	12	146
(TSLH320H-1000)	1000	1350	510 (2×255)	12	164

Note(') : The motor mass is not included.

Remark: If the model number in the parenthesis is required, please consult IKO.

Dimensions of motor *L_m*


unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A2	M2	K7
Without brake	96.5	95	66
With brake	136	128	119

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Precision Positioning Table LH

TSLH420H

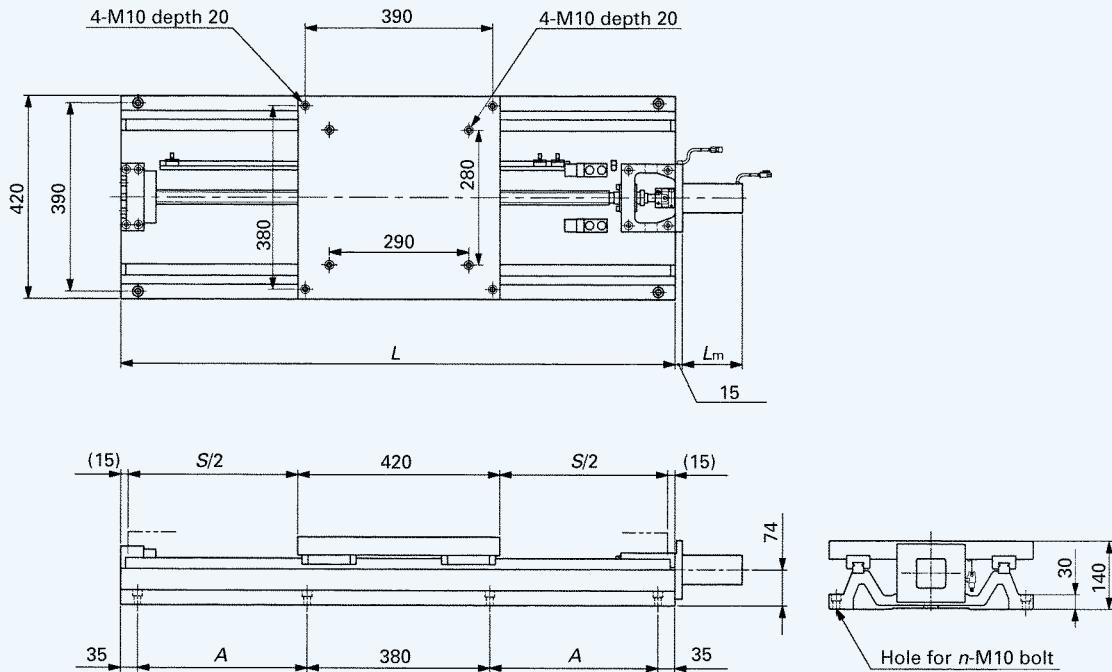

unit: mm

Model number	Stroke length <i>S</i>	Total length <i>L</i>	Mounting hole of bed <i>A</i> (quantity × pitch)	<i>n</i>	Mass ⁽¹⁾ (Reference) kg
TSLH420H- 500	500	950	250	8	176
TSLH420H- 600	600	1050	300	8	188
TSLH420H- 800	800	1250	400 (2×200)	12	212
(TSLH420H-1000)	1000	1450	500 (2×250)	12	237

Note⁽¹⁾ : The motor mass is not included.

Remark: If the model number in the parenthesis is required, please consult IKO.


Dimensions of motor *L_m*

unit: mm

Motor type	AC servo motor	
Motor code	AA4	MA4
Without brake	124.5	124
With brake	164	157

IKO Precision Positioning Table LH

CTLH120H

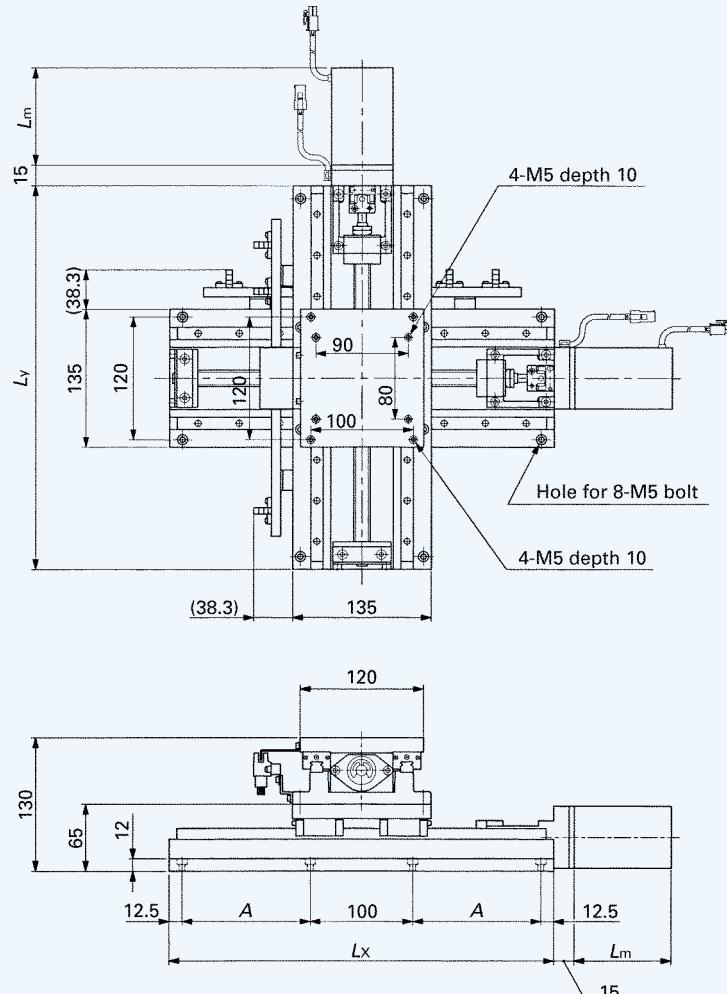

unit: mm

Model number	Stroke length S		Total length		Mounting hole of bed A	Mass(') (Reference) kg
	X axis	Y axis	Lx	Ly		
CTLH120H-1010	100	100	275	275	75	19.6
CTLH120H-2010	200	100	375	275	125	21.7
CTLH120H-2020	200	200	375	375	125	23.8
CTLH120H-3020	300	200	475	375	175	25.8
CTLH120H-3030	300	300	475	475	175	27.9

Note(') : The motor mass is not included.


Remark: If other stroke length or a combination of single axis tables of different sizes is required, please consult IKO.

Dimensions of motor L_m

unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A1	M1	K6
Without brake	94.5	103	87
With brake	135	135	129

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

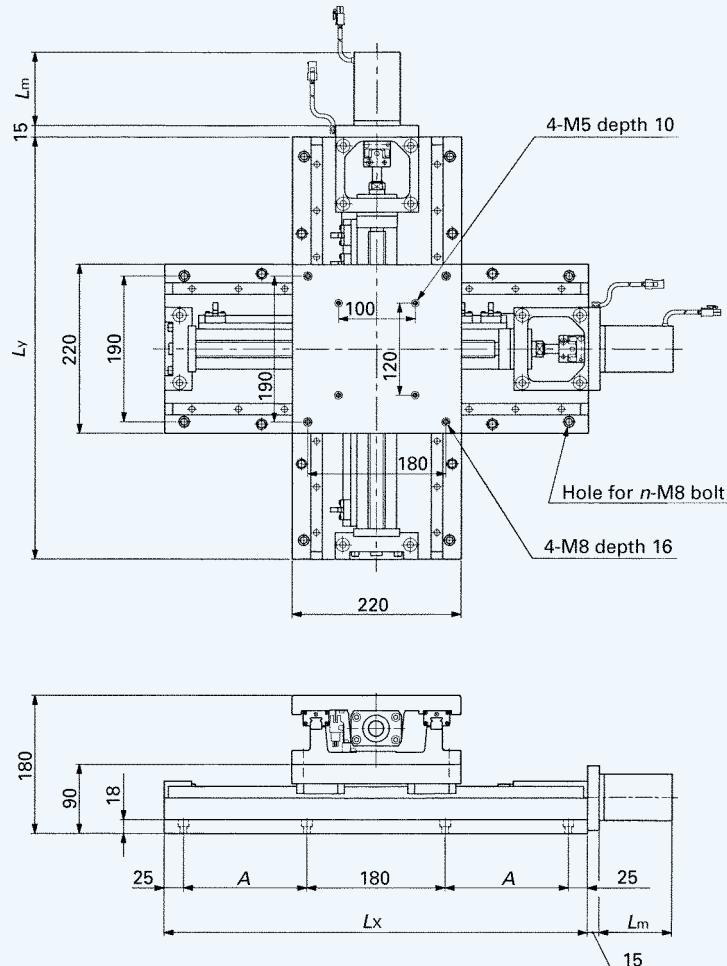

unit: mm

Model number	Stroke length S X axis	Stroke length S Y axis	Total length L _x	Total length L _y	Mounting hole of bed A (quantity × pitch)	n	Mass(⁽¹⁾) (Reference) kg
CTLH220H-2020	200	200	450	450	110	8	66.5
CTLH220H-3020	300	200	550	450	160	8	70.9
CTLH220H-3030	300	300	550	550	160	8	75.3
CTLH220H-4030	400	300	650	550	210 (2×105)	12	79.7
CTLH220H-4040	400	400	650	650	210 (2×105)	12	84.0

 Note⁽¹⁾ : The motor mass is not included.

 Remark: If other stroke length or a combination of single axis tables of different sizes is required, please consult **IKO**.


 Dimensions of motor L_m

unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A2	M2	K7
Without brake	96.5	95	66
With brake	136	128	119

IKO Precision Positioning Table LH

CTLH320H

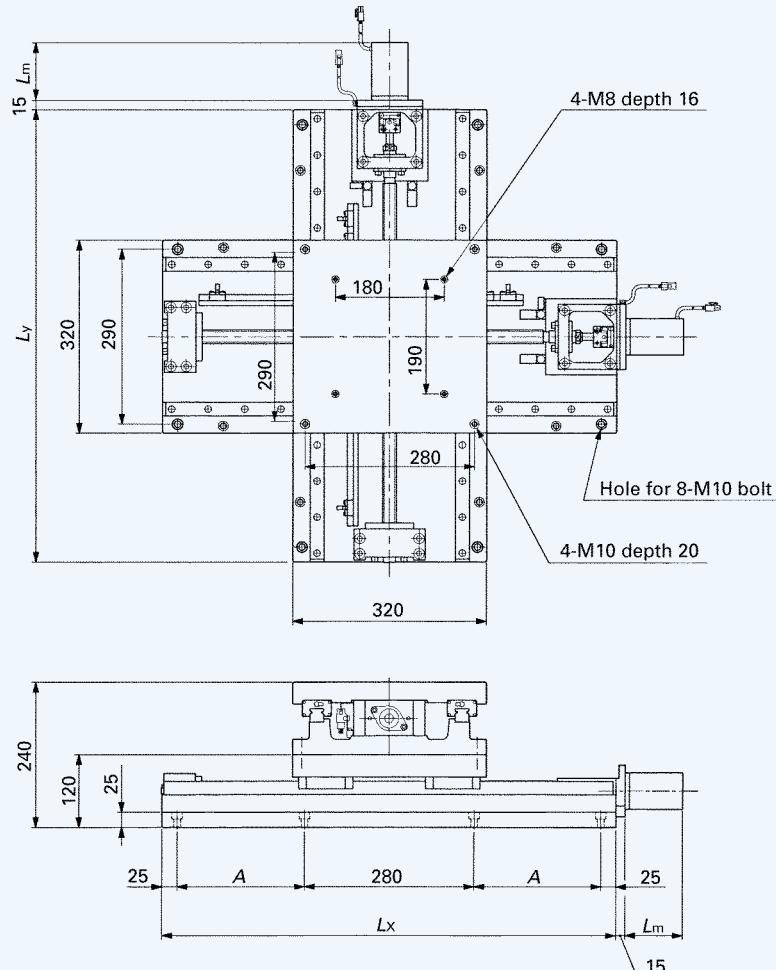

unit: mm

Model number	Stroke length S		Total length		Mounting hole of bed A	Mass(') (Reference) kg
	X axis	Y axis	Lx	Ly		
CTLH320H-3030	300	300	650	650	160	199
CTLH320H-4030	400	300	750	650	210	208
CTLH320H-4040	400	400	750	750	210	217
CTLH320H-5040	500	400	850	750	260	227
CTLH320H-5050	500	500	850	850	260	236

Note(') : The motor mass is not included.

Remark: If other stroke length or a combination of single axis tables of different sizes is required, please consult **IKO**.

Dimensions of motor L_m


unit: mm

Motor type	AC servo motor		Stepping motor
Motor code	A2	M2	K7
Without brake	96.5	95	66
With brake	136	128	119

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Precision Positioning Table LH Table with bellows

TSLH120H···J

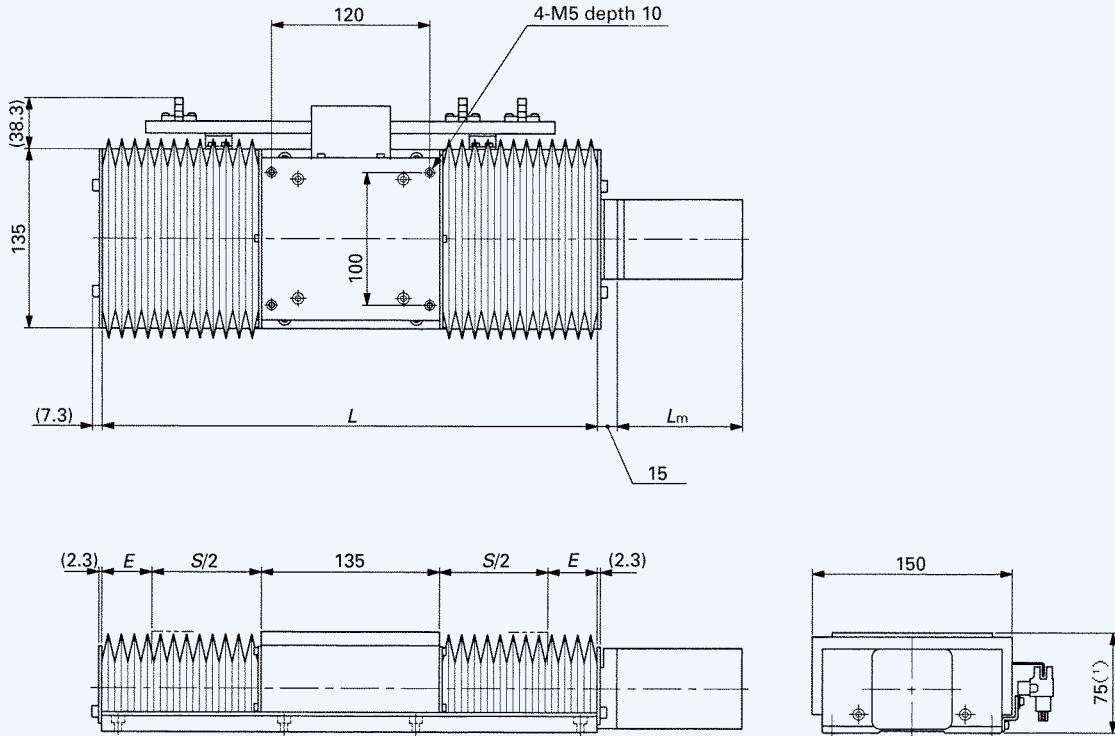

unit: mm

Model number	Stroke length <i>S</i>	Total length <i>L</i>	<i>E</i>
TSLH120H-100···J	85	275	27.5
TSLH120H-150···J	125	325	32.5
TSLH120H-200···J	165	375	37.5
TSLH120H-250···J	205	425	42.5
TSLH120H-300···J	240	475	50.0




Note⁽¹⁾ : The table with bellows is 10mm higher than the table without bellows.

Remark 1: If the table with bellows is mounted in a vertical position, the dimensions of bellows are different. Please consult IKO.

2: For the mounting dimensions of bed, refer to the dimension table on page

IKO Precision Positioning Table LH Table with bellows

TSLH220H···J, TSLH320H···J, TSLH420H···J

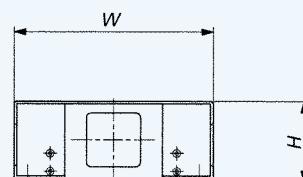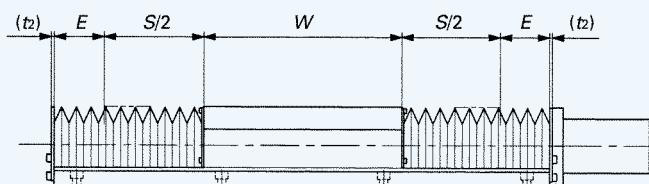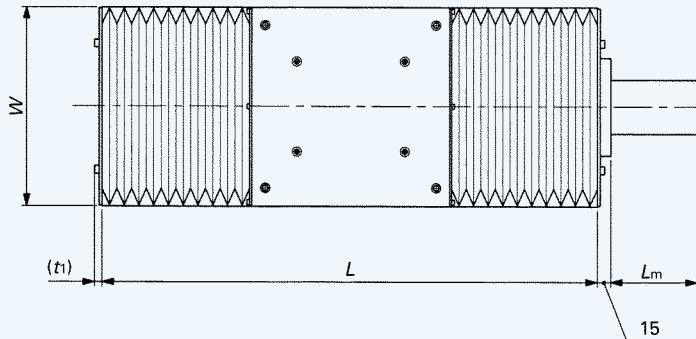


unit: mm

Model number	Stroke length S	Total length L	W	H	E	t_1	t_2
TSLH220H- 150···J	110	400	220	90	35	8.2	3.2
TSLH220H- 200···J	150	450			40		
TSLH220H- 250···J	180	500			50		
TSLH220H- 300···J	220	550			55		
TSLH220H- 400···J	300	650			65		
(TSLH220H- 500···J)	370	750			80		
(TSLH220H- 600···J)	440	850			95		
TSLH320H- 300···J	230	650	320	120	50	9.2	3.2
TSLH320H- 400···J	310	750			60		
TSLH320H- 500···J	400	850			65		
(TSLH320H- 600···J)	480	950			75		
(TSLH320H- 800···J)	640	1150			95		
(TSLH320H-1000···J)	800	1350			115		
TSLH420H- 500···J	410	950	420	140	60	10.5	4.5
TSLH420H- 600···J	500	1050			65		
TSLH420H- 800···J	660	1250			85		
(TSLH420H-1000···J)	830	1450			100		

Remark 1: If the table with bellows is mounted in a vertical position, the dimensions of bellows are different. Please consult IKO.

2: If the models in the parentheses are required, please consult IKO.

3: For mounting dimensions, refer to the dimension tables on pages 19 to 21.

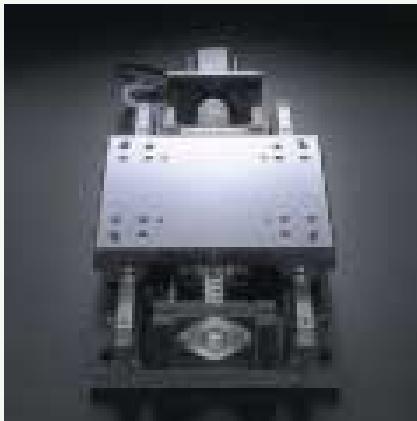

NIPPON THOMPSON CO., LTD.

Head office : 19-19 Takanawa 2-chome
 Minato-ku, Tokyo 108-8586, Japan
 Phone : Tokyo (03)3448-5850
 Fax : (03)3447-7637
 E-mail : ntt@ikonet.co.jp
 URL : <http://www.ikont.co.jp/>
 Plant : Gifu, Kamakura

IKO International, Inc.

- Fox Hill Ind. Park
 91 Walsh Drive
 Parsippany, NJ 07054
 U.S.A.
 Phone:(973)402-0254
 Toll Free: 1-800-922-0337
 Fax:(973)402-0441
 E-mail:eco@ikonet.co.jp
- 500 East Thorndale Ave.
 Wood Dale, IL 60191
 U.S.A.
 Phone:(630)766-6464
 Toll Free: 1-800-323-6694
 Fax:(630)766-6869
 E-mail:mwo@ikonet.co.jp
- 2121 Paulhan Street
 Rancho Dominguez, CA 90220
 U.S.A.
 Phone:(310)609-3988
 Toll Free: 1-800-252-3665
 Fax:(310)609-3916
 E-mail:wco@ikonet.co.jp
- 2150 Boggs Road, Suite 100
 Duluth, GA 30096
 U.S.A.
 Phone:(770)418-1904
 Toll Free: 1-800-874-6445
 Fax:(770)418-9403
 E-mail:seo@ikonet.co.jp
- 8105 N. Beltline Road
 Suite 130, Irving, TX 75063
 U.S.A.
 Phone:(972)929-1515
 Toll Free: 1-800-295-7886
 Fax:(972)915-0060
 E-mail:swo@ikonet.co.jp

Nippon Thompson Europe B.V.

- Sheffieldstraat 35-39
 3047 AN Rotterdam
 The Netherlands
 Phone:010-4626868
 Fax:010-4626099
 E-mail:nte@ikonet.co.jp
- Mündelheimer Weg 56
 40472 Düsseldorf
 Germany
 Phone:0211-414061
 Fax:0211-427693
 E-mail:ntd@ikonet.co.jp
- Donaustaufer Str. 200
 93059 Regensburg
 Germany
 Phone:0941-447737
 Fax:0941-447747
- Autovia Madrid-Barcelona, Km. 43,700
 Polig. Ind. AIDA, A-8, Ofic. 2, 1^a
 19200-Azuqueca de Henares
 Guadalajara, Spain
 Phone:949-263390
 Fax:949-263113
 E-mail:nts@ikonet.co.jp
- 2 Vincent Avenue, Crownhill
 Milton Keynes Bucks MK8 OAB
 United Kingdom
 Phone:01908-566144
 Fax:01908-565458
 E-mail:ntu@ikonet.co.jp
- Roissypole Le Dôme
 2 rue de La Haye
 BP 10950 Tremblay en France
 95733 Roissy C. D. G. Cedex
 France
 Phone:01-48165739
 Fax:01-48165746
 E-mail:ntf@ikonet.co.jp

Although all data in this catalog has been carefully compiled to make the information as complete as possible, NIPPON THOMPSON CO., LTD. shall not be liable for any damages whatsoever, direct or indirect, based upon any information in this catalog. NIPPON THOMPSON CO., LTD. makes no warranty, either express or implied, including the implied warranty of merchantability or fitness for a particular purpose.