


OIL DISCHARGE CONFIGURATION

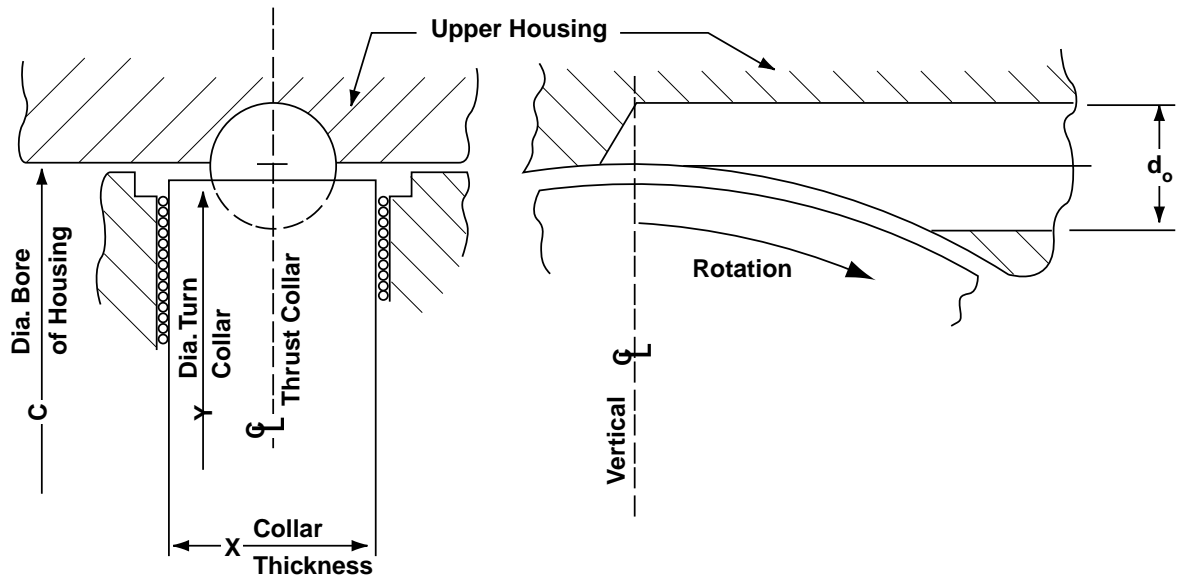

Recommended Discharge Dimensions, Styles J, B & E

Style J, B and E Bearings—English Units (inches)

Bearing Size	4.0	5.0	6.0	7.0	8.0	9.0	10.5	12.0	13.5	15.0	17.0
Housing Bore "C"	4.375	5.375	6.375	7.375	8.375	9.375	11.000	12.500	14.000	15.500	17.625
Collar Diameter "Y"	4.12	5.12	6.12	7.12	8.12	9.12	10.69	12.19	13.69	15.19	17.25
Collar Thickness "X"	0.88	0.88	1.00	1.25	1.38	1.50	1.75	2.00	2.25	2.50	2.88
Oil Outlet Diameter d_o	0.22	0.31	0.44	0.50	0.66	0.81	1.06	1.19	1.31	1.38	1.38

Style J, B and E Bearings—Metric Conversion (mm)

Bearing Size	101.6	127.0	152.4	177.8	203.2	228.6	266.7	304.8	342.9	381.0	431.8
Housing Bore "C"	111.13	136.53	161.93	187.33	212.73	238.13	279.40	317.50	355.60	393.70	447.68
Collar Diameter "Y"	104.6	130.0	155.4	180.8	206.2	231.6	271.5	309.6	347.7	385.8	438.2
Collar Thickness "X"	22.4	22.4	25.4	31.8	35.1	38.1	44.5	50.8	57.2	63.5	73.2
Oil Outlet Diameter d_o	5.6	5.6	11.2	12.7	16.8	20.6	26.9	30.2	33.3	35.1	35.1