


OIL DISCHARGE CONFIGURATION

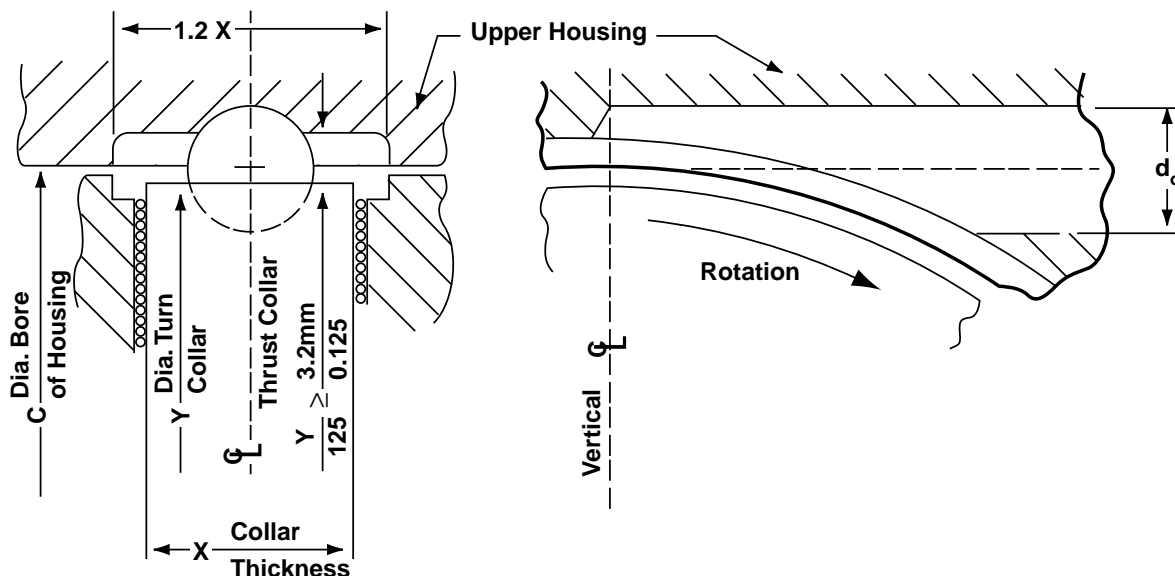

Recommended Discharge Dimensions, Style S

Style S Bearings—English Units (inches)

Bearing Size	3	4	5	6.5	7.5	8	9.88	11.12	12.25	13	15	18
Housing Bore "C"	3.250	4.875	5.375	6.750	7.750	8.375	10.125	11.500	12.625	13.500	15.500	18.750
Collar Diameter "Y"	3.12	4.62	5.12	6.62	7.62	8.12	10.00	11.25	12.38	13.19	15.19	18.25
Collar Thickness "X"	0.62	0.88	0.88	1.00	1.12	1.38	1.50	1.75	2.00	2.25	2.50	3.00
Oil Outlet Diameter d_o	0.19	0.28	0.47	0.56	0.62	0.81	0.88	0.88	0.94	1.09	1.25	1.44

Style S Bearings—Metric Conversions (mm)

Bearing Size	76	102	127	165	191	203	251	283	311	330	381	457
Housing Bore "C"	82.55	123.83	136.53	171.45	196.53	212.73	257.18	292.10	320.68	342.90	393.70	476.25
Collar Diameter "Y"	79.3	117.3	130.1	168.1	193.5	206.3	254.0	285.8	314.5	335.0	385.8	463.6
Collar Thickness "X"	15.8	22.4	22.4	25.4	28.5	35.1	38.1	44.5	50.8	57.2	63.5	76.2
Oil Outlet Diameter d_o	4.8	7.1	11.9	14.2	15.7	20.6	22.4	22.4	23.9	27.7	31.8	36.6