



Flexible Disc Couplings

series 71 spacer coupling

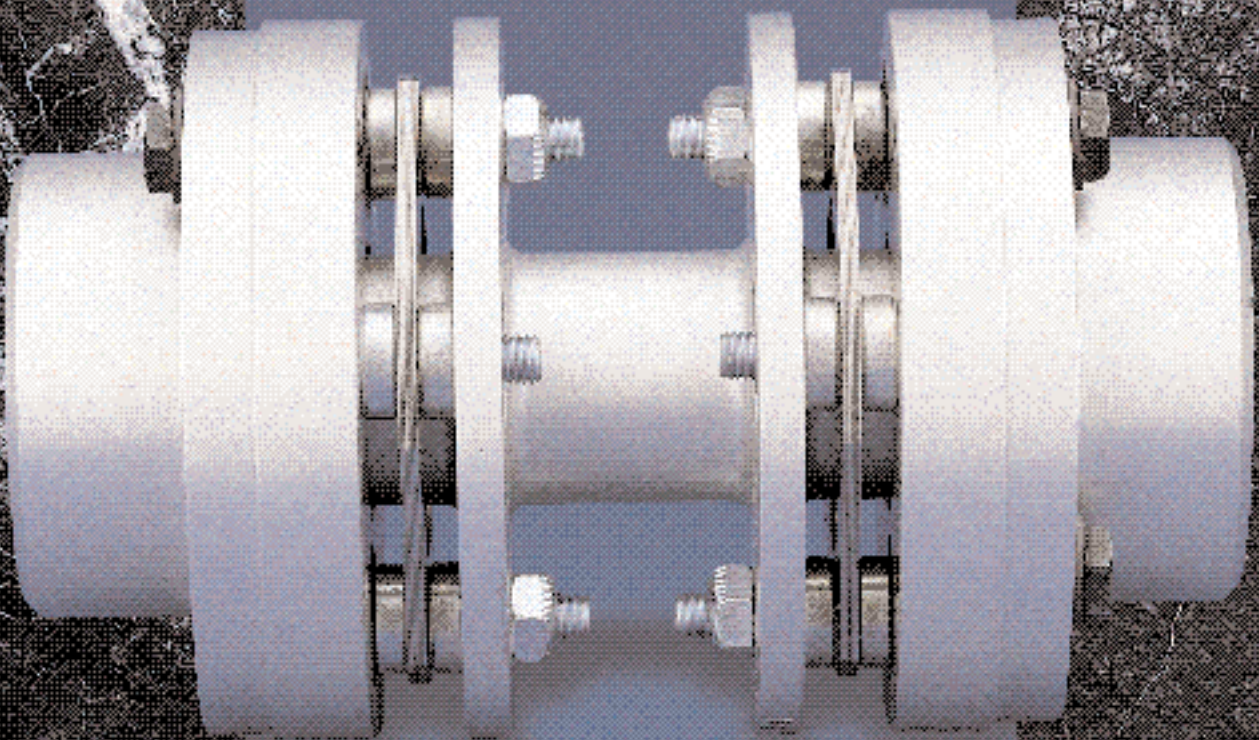


Now with increased
torque ratings, larger bore
capacities, and extended sizes.

series 71, designed for the user... here's why:

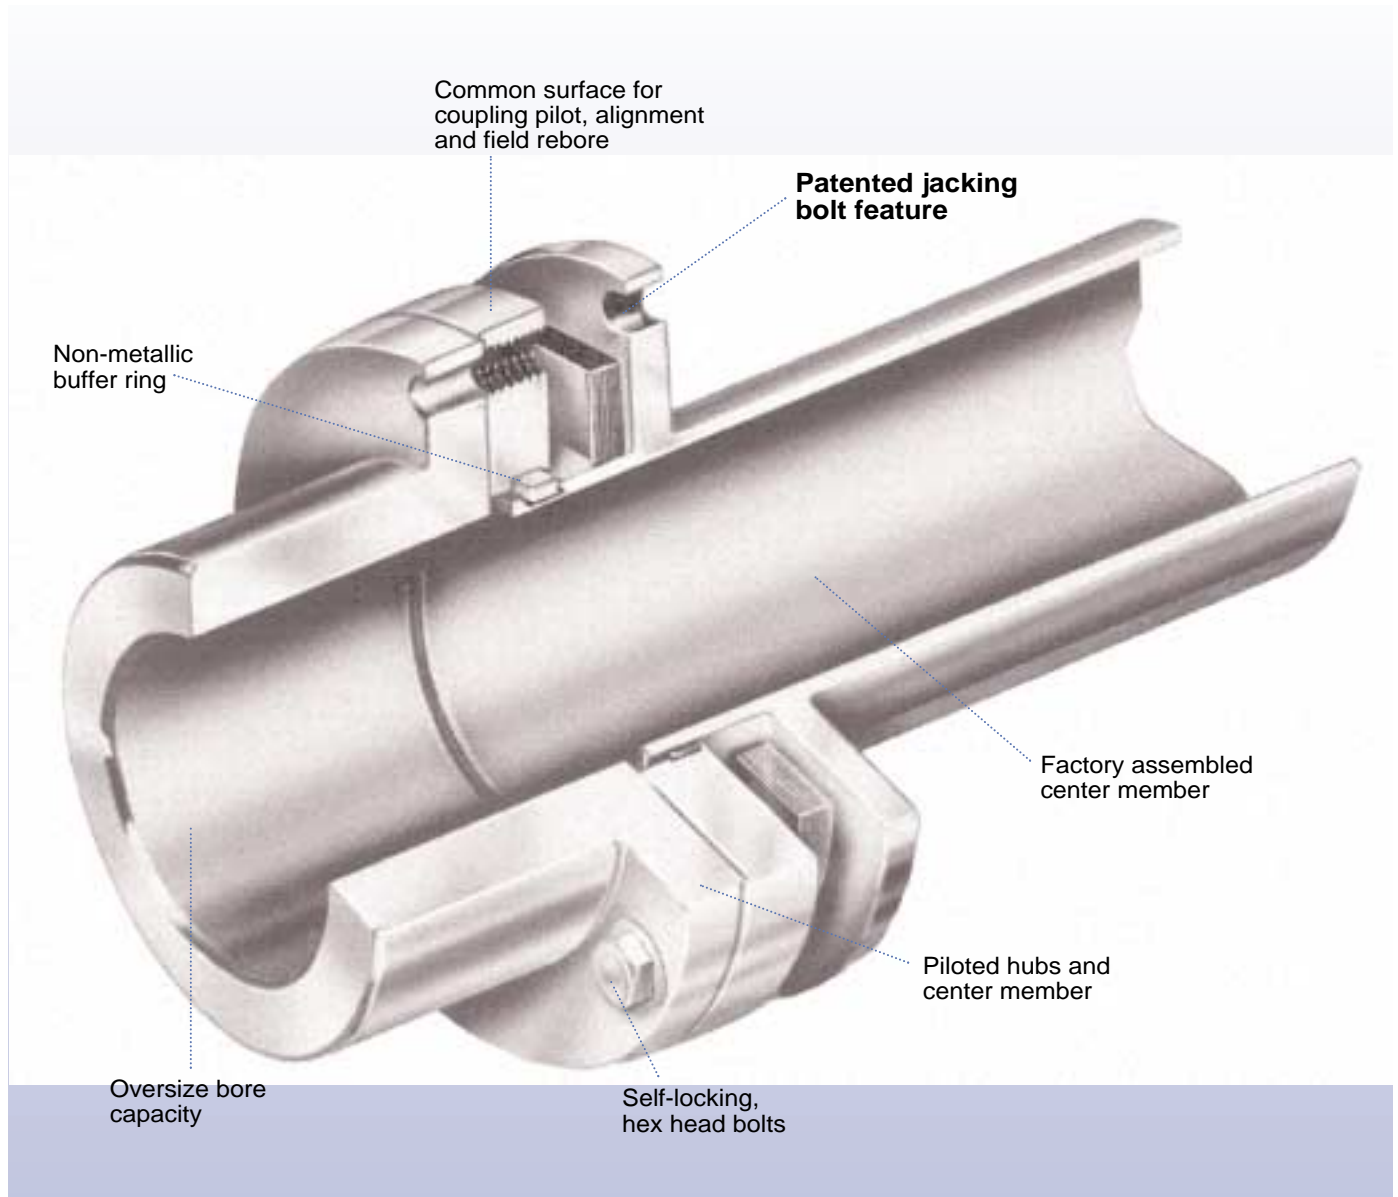

- Fewer parts — three piece design features unitized center member and two piloted fit hubs
- Quick installation — no special wrenching, easily accessible bolting
- Easy alignment — piloted flanges, common reference surface
- Patented jacking bolt feature compresses coupling for easy installation and removal of center assembly
- Optimized 4, 6 and 8 bolt designs
- Disc design provides low flexing forces with high overload capacity
- Manufactured to AGMA Class 9 balance specification when finish bored
- Meets API 610 requirements when puller bolt holes are specified

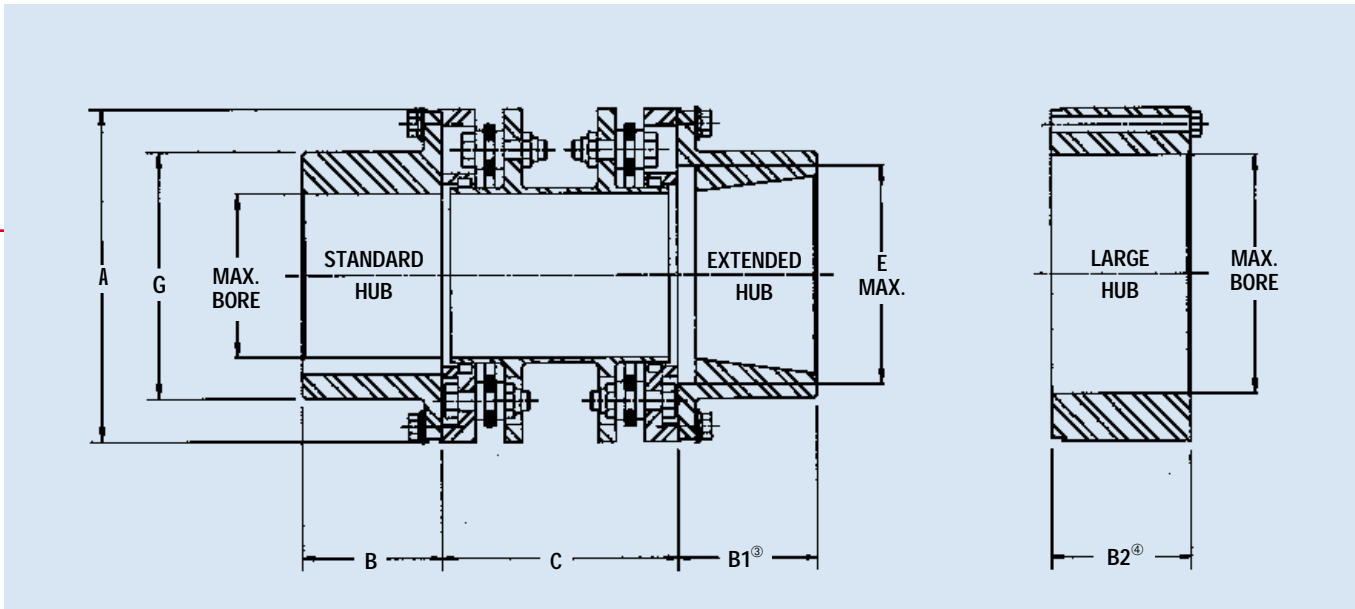

Stocked "C" Dimensions

General Dimensions — Inches

Coupling Size	"C" Dimension (In.)								Coupling Size	B & B1 Hub Max. Bore \varnothing	B2 Hub Max. Bore \varnothing	A	B	\varnothing B1	\varnothing B2	Std. C	Min. C	Max. E	G
	3-1/2	4-3/8	5	5-1/2	7	7-1/2	8	9											
150	•	•	•						150	1.500	2.375	3.59	1.31	1.69	1.62	3.50	3.44	2.06	2.31
175	•	•	•						175	1.875	2.750	4.16	1.56	2.06	1.81	3.50	3.44	2.56	2.81
225	•		•	•	•				225	2.250	3.250	4.94	2.00	2.50	2.06	5.00	3.44	3.09	3.34
300			•	•	•	•			300	3.000	4.000	5.97	2.62	3.25	2.75	5.00	4.00	4.12	4.44
350			•	•	•				350	3.500	4.500	6.75	3.12	3.75	3.00	5.00	5.00	5.00	5.25
375			•	•	•				375	3.750	5.000	7.62	3.25	4.00	3.25	5.50	5.00	5.31	5.66
412				•	•	•			412	4.125	—	8.00	3.62	4.38	—	7.00	6.50	5.75	6.09
462					•	•	•		462	4.625	—	9.00	4.12	5.00	—	7.00	7.00	6.31	6.84
512					•		•		512	5.125	—	10.03	4.50	5.38	—	7.00	7.00	7.06	7.62
562						•	•		562	5.625	—	10.97	5.00	6.00	—	8.00	8.00	7.69	8.38
600							•	•	600	6.000	—	11.72	5.25	6.38	—	9.00	9.00	8.31	8.94
712									712	7.125	—	13.88	6.25	—	—	9.38	8.88	10.18	10.75
800									800	8.000	—	15.56	7.00	—	—	10.88	10.25	11.37	12.00
875									875	8.750	—	17.12	7.75	—	—	12.00	11.38	12.50	13.12
1038									1038	10.375	—	19.75	9.00	—	—	14.00	13.25	14.87	15.56


For "C" dimensions other than shown, consult Rexnord.

Engineering Data

Coupling Size	Max. Horsepower Per 100 RPM Service Factor					Max. RPM \varnothing		Max. Continuous Torque (Lb.-In.)	Peak Overload Torque (Lb.-In.)	Weight (Lbs.) \varnothing	Weight Change Per Inch of "C" (Lbs.)	WR ² (Lb.-In. ²) \varnothing	WR ² Change Per Inch of "C" (Lb.-In. ²)	Axial Deflection (In.) \varnothing	No. of Bolts Per Disc
	1.0	1.5	2.0	2.5	3.0	Not. Bal. \varnothing	Balanced								
150	1.5	.98	.74	.59	.49	9,000	20,800	930	1,860	6.7	.10	10.6	.03	±.050	4
175	2.6	1.7	1.3	1.0	.86	8,300	17,000	1,630	3,260	9.4	.14	20.6	.09	±.070	4
225	4.8	3.2	2.4	1.9	1.6	7,700	16,000	3,060	6,120	14	.19	42	.25	±.075	6
300	11.5	7.7	5.8	4.6	3.8	6,800	14,000	7,260	14,520	26	.26	121	.66	±.085	6
350	21.2	14.2	10.6	8.4	7.1	6,200	13,500	13,400	26,800	43	.42	259	1.18	±.090	6
375	30.6	20.4	15.3	12.2	10.2	5,650	12,000	19,300	38,600	55	.43	423	1.62	±.095	6
412	35.7	23.8	17.8	14.3	11.9	5,350	11,000	22,500	45,000	71	.60	615	2.90	±.110	6
462	64.1	42.7	32.1	25.6	21.4	5,000	10,000	40,400	80,800	101	.80	1,110	4.65	±.120	6
512	87.3	58.2	43.6	34.9	29.1	4,700	9,200	55,000	110,000	135	1.04	1,830	7.43	±.130	6
562	133	89.0	66.7	53.4	44.5	4,350	8,300	84,100	168,200	186	1.28	3,020	10.38	±.145	6
600	145	97.0	72.8	58.2	48.5	4,150	7,800	91,700	183,400	228	1.75	4,250	17.51	±.160	6
712	174	116	87.0	69.6	58.0	3,450	7,200	110,000	220,000	355	1.37	9,090	16.9	±.082	8
800	255	170	128	102	85.0	3,250	6,800	161,000	322,000	504	2.17	16,200	33.2	±.092	8
875	373	250	187	149	123	3,050	6,400	235,000	470,000	672	2.41	26,200	45.6	±.102	8
1038	549	366	275	220	183	2,900	5,800	346,000	692,000	1,120	3.21	57,000	74.4	±.115	8

- ① See p. E-46 in the engineering catalog for explanation of RPM limits and balancing recommendations.
- ② Weight and WR² with standard length hubs, maximum bore and standard "C".
- ③ Extended hub length is designed longer in order to include a counter-bore for the threaded extension on a tapered shaft.
- ④ Large hub length. For sizes not shown, consult Rexnord.
- ⑤ Thomas Flexible Disc Couplings meet all NEMA (MG1-14.37) specifications without modification or additional end-float restricting devices.
- ⑥ Series 71 Coupling assembly meets AGMA Balance Class 9 when furnished with finished bores.
- ⑦ Hub sizes 150-600 furnished without a finished bore will be solid. Hub sizes 712 and larger will have a minimum rough bore when finish bore is not specified.

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

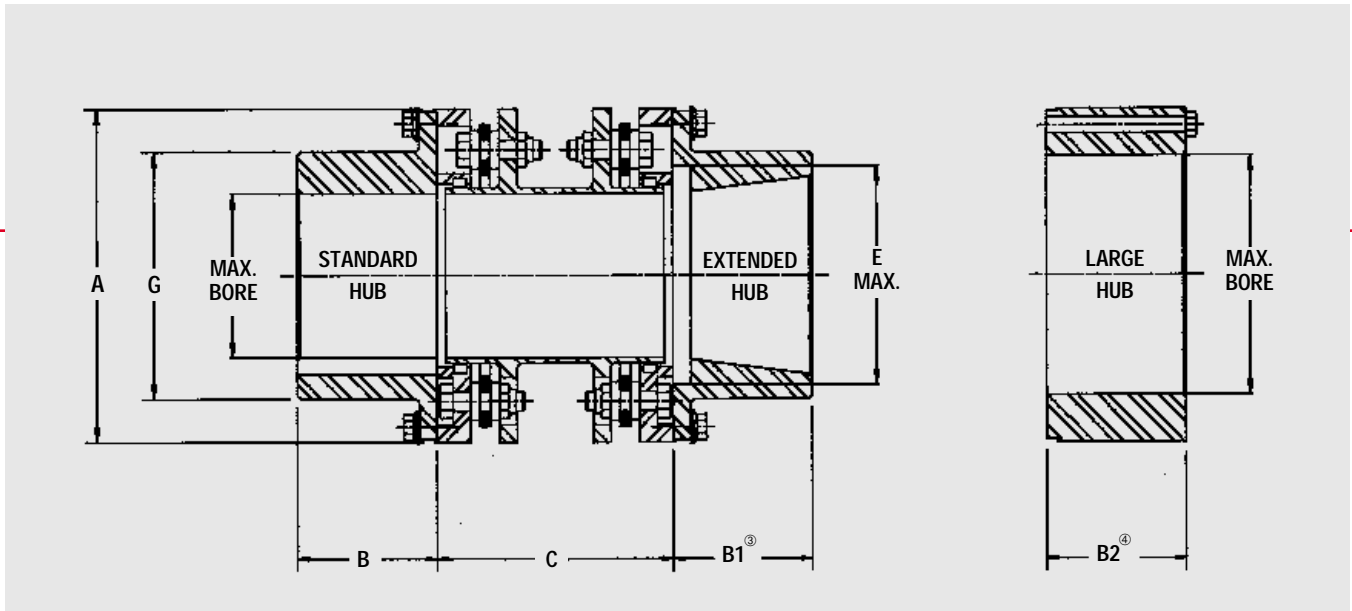

Stocked "C" Dimensions

General Dimensions — Millimeters

Coupling Size	"C" Dimension (mm)										Coupling Size	B & B1 Hub Max. Bore \varnothing	B2 Hub Max. Bore \varnothing	A	B	\varnothing B1	\varnothing B2	Std. C	Min. C	Max. E	G
	89	100	111	127	140	178	180	190.5	203.2	228.6											
150	•										150	38	—	91.28	33.3	42.9	41.3	89	87	52.3	58.7
175	•										175	48	70	105.6	39.7	52.4	46.0	89	87	65.0	71.4
225	•										225	58	83	125.4	50.8	63.5	52.4	127	87	78.5	84.9
300	•										300	76	102	151.6	66.7	82.6	69.9	127	102	104.6	112.8
350				•	•	•					350	89	114	171.5	79.4	95.3	76.2	127	127	127.0	133.4
375				•	•	•					375	95	127	193.7	82.6	101.6	82.6	139.7	127	134.9	143.7
412				•	•	•					412	105	—	203.2	92.1	111.1	—	178	165	146.0	154.8
462				•	•	•		•	•		462	118	—	228.6	104.8	127.0	—	178	178	160.3	173.8
512						•					512	130	—	254.8	114.3	136.5	—	178	178	179.3	193.7
562								•	•		562	143	—	278.6	127.0	152.4	—	203.2	203	195.3	212.7
600									•	•	600	152	—	297.7	133.4	161.9	—	228.6	229	211.1	227.0
712											712	181	—	352.4	158.8	—	—	238.1	225	258.6	273.1
800											800	203	—	395.3	177.8	—	—	276.2	260	288.8	304.8
875											875	222	—	435.0	196.9	—	—	304.8	289	317.5	333.4
1038											1038	264	—	501.7	228.6	—	—	355.6	337	377.7	395.3

For "C" dimensions other than shown, consult Rexnord.

Engineering Data

Coupling Size	Max. Kilowatt Per 100 RPM Service Factor					Max. RPM \varnothing		Max. Continuous Torque (Nm)	Peak Overload Torque (Nm)	Weight (kg) \varnothing	Weight Change Per cm of "C" (kg)	J (kg-cm ²) \varnothing	J Change Per cm of "C" (kg-cm ²)	Axial Deflection (mm) \varnothing	No. of Bolts Per Disc
	1.0	1.5	2.0	2.5	3.0	Not. Bal. \varnothing	Balanced								
	150	1.1	.73	.55	.44	.36	9,000								
175	1.9	1.3	.96	.77	.64	8,300	17,000	184	368	4.24	.025	60	.10	±1.8	4
225	3.6	2.4	1.8	1.4	1.2	7,700	16,000	346	692	6.30	.034	120	.29	±1.9	6
300	8.6	5.7	4.3	3.4	2.9	6,800	14,000	820	1,640	11.75	.046	360	.76	±2.2	6
350	15.8	10.6	7.9	6.3	5.3	6,200	13,500	1,515	3,030	19.4	.075	760	1.36	±2.3	6
375	22.8	15.2	11.4	9.1	7.6	5,650	12,000	2,180	4,360	25.1	.077	1,250	1.87	±2.4	6
412	26.6	17.7	13.3	10.6	8.9	5,350	11,000	2,540	5,080	32.0	.107	1,800	3.34	±2.8	6
462	47.8	31.9	23.9	19.1	15.9	5,000	10,000	4,565	9,130	45.8	.143	3,280	5.36	±3.0	6
512	65.1	43.4	32.5	26.0	21.7	4,700	9,200	6,215	12,430	61.2	.185	5,400	8.56	±3.3	6
562	99.5	66.4	49.8	39.8	33.2	4,350	8,300	9,500	19,000	84.4	.229	8,900	12.0	±3.7	6
600	108.5	72.4	54.3	43.4	36.2	4,150	7,800	10,360	20,720	103.4	.313	12,500	20.2	±4.1	6
712	129	86.8	65.1	52.1	43.4	3,450	7,200	12,400	24,800	161	.245	26,650	19.5	±2.1	8
800	190	127	95.3	76.2	63.5	3,250	6,800	18,200	36,400	229	.387	47,700	38.2	±2.3	8
875	278	185	139	111	92.7	3,050	6,400	26,500	53,000	305	.430	77,550	52.5	±2.6	8
1038	409	273	205	164	136	2,900	5,800	39,100	78,200	490	.573	165,000	85.7	±2.9	8

- ① See p. E-46 in the engineering catalog for explanation of RPM limits and balancing recommendations.
- ② Weight and WR² with standard length hubs, maximum bore and standard "C".
- ③ Extended hub length is designed longer in order to include a counter-bore for the threaded extension on a tapered shaft.
- ④ Large hub length. For sizes not shown, consult Rexnord.
- ⑤ Thomas Flexible Disc Couplings meet all NEMA (MG1-14.37) specifications without modification or additional end-float restricting devices.
- ⑥ Series 71 Coupling assembly meets ISO G6.3 BALANCE when furnished with finished bores. ISO G2.5 available when specified.
- ⑦ Hub sizes 150-600 furnished without a finished bore will be solid. Hub sizes 712 and larger will have a minimum rough bore when finish bore is not specified.

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

Selection Procedures

The following procedure is used to select disc couplings for most applications. Special consideration must be given to coupling selection for those applications involving abnormal loading or design. Rexnord engineers are readily available for selection advice and assistance.

Coupling Selection:






1. Determine HP/100 RPM:

$$\text{HP/100 RPM} = \frac{\text{Horsepower} \times 100}{\text{RPM}}$$

2. Determine Service Factor:
Select the proper Service Factor from the Table.
3. Select the Coupling Size.
4. Check Limiting Conditions:
 - a. Check maximum speed.
 - b. Check maximum bore.
 - c. Check other dimensions such as shaft separation, overall length, O.D. etc.
 - d. Check to be sure that the maximum torque to be transmitted, such as start-up or stall torques, do not exceed the coupling's Peak Overload Torque Rating.

Service Factors

Service Factors are a means of classifying different equipment and applications into various load classifications. Due to variations in application of equipment, service factors are used to adjust equipment ratings to accommodate for variable loading conditions.

Load Classifications	Service Factors
 Continuous service and running loads vary only slightly.	1.0
 Torque loading varies during operation of the equipment.	1.5
 Torque loading varies during operation, frequent stop/start cycles are encountered.	2.0
 For shock loading and substantial torque variations.	2.5
 For heavy shock loading or light reversing drives.	3.0

Footnote:


The Service Factor Table considers the driven equipment only and assumes a normal electric motor or turbine driver. For prime movers of the reciprocating type (engines, etc.) add the following to the Service Factor:

- For 8 or more cylinders, add 0.5
- For 6 cylinders, add 1.0
- For 4 cylinders, add 1.5
- For less than 4 cylinders, consult Rexnord

Typical Service Factors Motor and Turbine Driven Equipment

Application	Typical Service Factor
Blowers	
Centrifugal	1.0
Lobe.....	1.5
Vane	1.5
Compressors	
Centrifugal	1.0
Lobe, Vane, Screw	1.5
Reciprocating – Multi-Cylinder.....	Consult Rexnord
Axial.....	1.0
Fans	
Centrifugal	
Forced Draft (Hostile Environment)	1.5
Induced Draft (Hostile Environment)	1.5
Axial	
Forced Draft (Hostile Environment)	1.5
Induced Draft (Hostile Environment)	1.5
Light Duty Blowers & Fans	1.0
Generators	
Non-Welding.....	1.5
Oil Industry	
Chillers.....	1.5
Oil Well Pumping	2.0
Paraffin Filter Press	2.0
Rotary Kilns	2.0
Pumps	
Centrifugal	
General Duty (Liquid).....	1.0
Boiler Feed	1.0
Slurry (Sewage, etc.)	1.5
Dredge.....	2.0
Reciprocating	
Double Acting	2.0
Single Acting	
1 or 2 Cylinders.....	2.5
3 or more Cylinders	2.0
Rotary – Gear, Lobe, Vane.....	1.5
Sewage Disposal Equipment.....	1.5
Sewage Treatment Pumps	1.5

Balance Recommendations

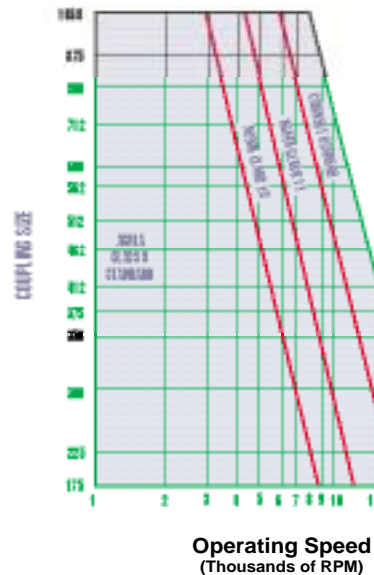

Note: The above recommendations and balance classes are based on AGMA Specifications 515.02, High Sensitivity. If conditions exist other than as defined in 515.03 for high sensitivity, consult Rexnord. The above information should be used as a guide only. AGMA Class 9 balance furnished as standard with finished bore couplings.

Worldwide Service Locations

AUSTRALIA

Rexnord Australia Pty Ltd
40 Marigold St.
Revesby, N.S.W. 2212
Australia
T: 61-2-9773-0575
F: 61-2-9774-5514

BRAZIL

Rexnord Correntes Ltda
Caixa Postal 290
93001 Sao Leopoldo-RS
Brazil
T: 55-51-588-3000
F: 55-51-588-1334

CANADA

Rexnord Canada Ltd
81 Maybrook Dr
Scarborough, Ontario
M1V 3Z2
T: 416-297-6868
F: 416-297-6873

CHINA

Rexnord China
Conch Building, Ste 621
1271 Zhongshan Xi Rd
Shanghai, China 200051
T: 86-21-62701942
F: 86-21-62701943

EUROPE

Rexnord Belgium NV
Airport Circle Center
Maalbeekweg 17
1930 Zaventem
Belgium
T: 32-2-725-4060
F: 32-2-720-1023

LATIN AMERICA

Rexnord International Inc
4695 W Greenfield Ave
Milwaukee, WI 53214 USA
T: 414-643-2242
F: 414-643-3666

MEXICO

Cadenas y Componentes
Rexnord, SA de CV
Privada de los Industriales 115
Cd Industrial Benito Juarez
Zona Jurica
76100 Queretaro Oro
T: 52-42-18-50-00
F: 52-42-18-10-90

SINGAPORE

Rexnord International Inc
36 Purvis St
Talib Center #02-01/04
Singapore 188613
T: 65-338-5622
F: 65-338-5422

UNITED STATES

Rexnord Corp - Atlanta
2300 Lake Park Dr #150
Smyrna, GA 30080
T: 770-431-7200
F: 770-431-7299

Rexnord Corp - Columbus
3655 Brookham Dr, Ste J
Grove City, OH 43123
T: 614-675-1800
F: 614-675-1898

Rexnord Corp - Dallas
1217 Corporate Dr
Arlington, TX 76006
T: 817-640-3332
F: 817-640-8704

Rexnord Corp - Fresno
1080 W Sierra Ave, Ste 102
Fresno, CA 93711
T: 559-435-1111
F: 559-439-6887



Thomas Coupling Operation
304 Main Avenue
PO Box 549
Warren, PA 16365-0549 USA
Phone: 814/723-6600
Fax: 814/726-1740
www.rexnord.com

