

Narrow Series **MSTN(G)**

[Menu](#)

[P/N X-Ref](#)


[Materials](#)

[Clearance/Torque](#)

[Staking Groove](#)

[Limits & Fits](#)

[Keyway](#)

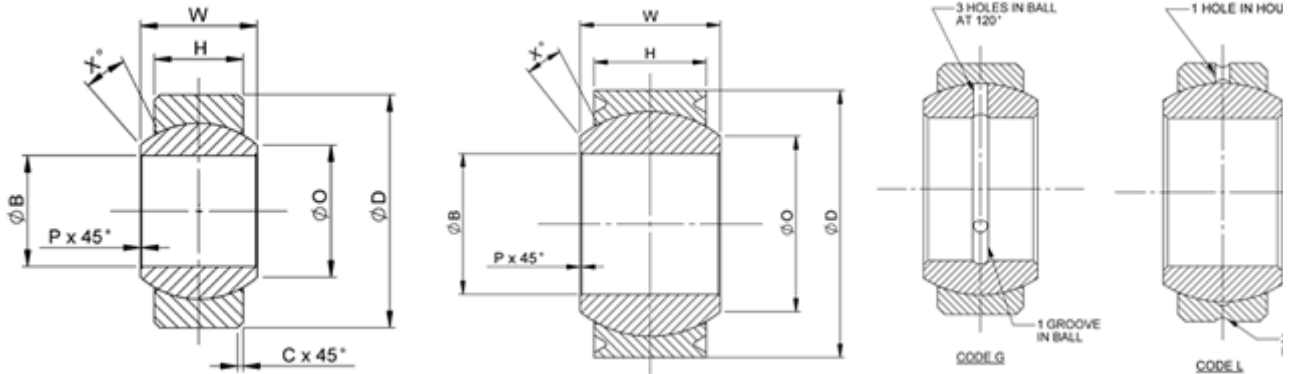

Bore code	B		D		H	W	O	C	P	X°	Ball dia nom	Max Static Radial Load N	Weight g max
	nom	limit	nom	limit	+0.1 -0.1	+0 -0.06	min			min			
05	5		14	+0.005	5.5	7.0	8.6	0.3 to		9	11.11	18600	7
06	6	+0.002	16	-0.013	6.5	9.0	9.0	0.6		14	12.70	26700	9
10	10	-0.010	21		8.0	10.5	11.9	0.5		11	15.87	43700	20
12	12	+0.003	25	-0.015	10.0	13.0	15.0	to 0.8	0.1 to 0.4	10	19.85	68200	32
22	22	-0.011	40	+0.008	18.0	22.0	27.1			8	34.90	240200	126
25	25	+0.003	45	-0.019	20.0	25.0	30.8	0.6 to		8	39.67	307000	185
30	30	-0.013	51	+0.010	24.0	28.0	35.5	1.0		6	45.22	389000	300

Dimensions in millimetres



Head Office

UK

Germany

Contact Details

France

Italy

Singapore

USA