

Wide Series MSTW(G)

Menu

P/N X-Ref


Materials

Clearance/Torque

Staking Groove

Limits & Fits

Keyw

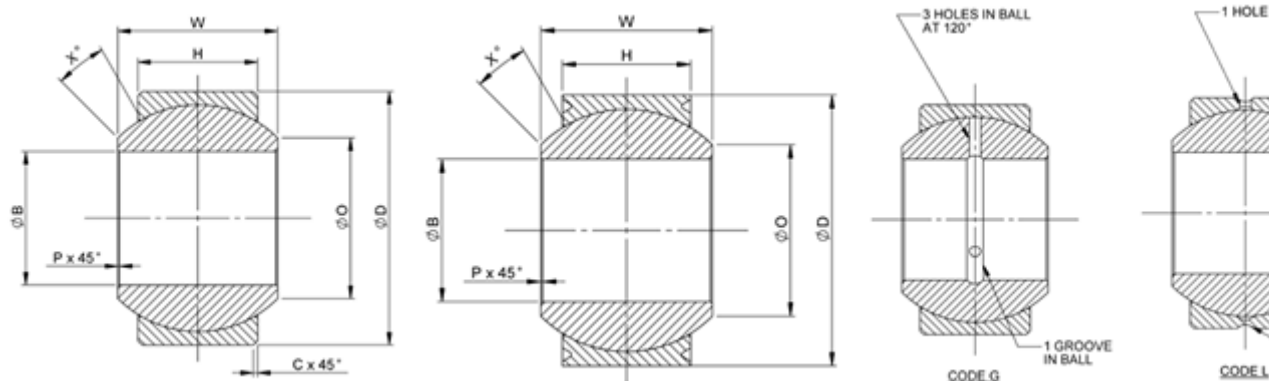

Bore code	B		D		H	W	O	C	P	X°	Ball dia nom	Max Static Radial Load N	Weight g max	
	nom	limit	nom	limit	+0.1 -0.1	+0 -0.06	min			min				
06	6		16	+0.005	8.5	11	7.7			15	13.49	40000	16	
08	8	+0.002 -0.010	18	-0.013	8.0	11	10.3			14	15.08	41500	17	
10	10		21		10.0	12.5	12.2	0.5 to 0.8		10	17.46	63000	27	
12	12		26	+0.006	13.0	16	15.5		10	22.22	105100	49		
15	15	+0.003 -0.011	29	-0.015	13.5	17	18.9	0.1 to 0.4		9	25.40	125600	62	
17	17		30		14.5	18	20.1		9	26.98	144900	69		
20	20		35	+0.008 -0.019	16.0	20	24.7			8	31.75	191100	104	
25	25	+0.003 -0.013	54		26.0	32	35.3	0.06 to 1.0		9	47.62	491400	445	
30	30		60	+0.010	28.0	34	40.9				8	53.18	548600	480
35	35		65	-0.023	29.0	36	45.5	0.8 to 1.2		8	58.02	623600	565	
40	40		68		31.0	38	47.0				8	60.44	701300	600
45	45	+0.003 -0.015	76		33.0	41	54.1				8	67.88	846200	800
50	50		82	+0.013 -0.028	35.0	44	60.3			8	74.64	994500	970	

Dimensions in millimetres



Head Office

UK

Germany

Contact Details

France

Italy

Singapore

USA